





eLED VECTRA-28

Flexible LED strip for outdoor lighting. IP65

Tira LED flexible para uso exterior. IP65

eLED
VECTRA-28
12-24V



-  2700 K
-  3000 K
-  4200 K
-  6500 K

Model <i>Modelo</i>	Ref. No.	Colour <i>Color</i>	DC Voltage <i>Tensión DC</i>		Colour temp. <i>Tª. color</i>	LED units per meter <i>Unidades LED por metro</i>	IP	Power per meter <i>Potencia por metro</i>		Luminous efficacy per meter <i>Eficiencia luminosa por metro</i>	Luminous efficacy per watt <i>Eficiencia luminosa por vatio</i>	CRI	Wide <i>Ancho</i>		Meters per reel <i>Metros por rollo</i>
			V	K				W/m	lm/m*				mm	pcs.	
eLED VEC28-06-865-12V-IP65	9955040	Cold White / <i>Blanco Frío</i>	12	6500	60	65	6	690	115	>80	12	50	3	5	
eLED VEC28-06-842-12V-IP65	9955041	Neutral White / <i>Blanco Neutro</i>	12	4200	60	65	6	660	110	>80	12	50	3	5	
eLED VEC28-06-830-12V-IP65	9955042	Warm White / <i>Blanco Cálido</i>	12	3000	60	65	6	630	105	>80	12	50	3	5	
eLED VEC28-06-865-24V-IP65	9955043	Cold White / <i>Blanco Frío</i>	24	6500	60	65	6	690	115	>80	12	100	6	5	
eLED VEC28-06-842-24V-IP65	9955044	Neutral White / <i>Blanco Neutro</i>	24	4200	60	65	6	660	110	>80	12	100	6	5	
eLED VEC28-06-830-24V-IP65	9955045	Warm White / <i>Blanco Cálido</i>	24	3000	60	65	6	630	105	>80	12	100	6	5	
eLED VEC28-06-827-24V-IP65	9955046	Comfort White / <i>Blanco Confort</i>	24	2700	60	65	6	630	105	>80	12	100	6	5	
eLED VEC28-12-865-12V-IP65	9955050	Cold White / <i>Blanco Frío</i>	12	6500	120	65	12	1200	100	>80	12	25	3	5	
eLED VEC28-12-842-12V-IP65	9955051	Neutral White / <i>Blanco Neutro</i>	12	4200	120	65	12	1140	95	>80	12	25	3	5	
eLED VEC28-12-830-12V-IP65	9955052	Warm White / <i>Blanco Cálido</i>	12	3000	120	65	12	1080	90	>80	12	25	3	5	
eLED VEC28-12-865-24V-IP65	9955053	Cold White / <i>Blanco Frío</i>	24	6500	120	65	12	1200	100	>80	12	50	6	5	
eLED VEC28-12-842-24V-IP65	9955054	Neutral White / <i>Blanco Neutro</i>	24	4200	120	65	12	1140	95	>80	12	50	6	5	
eLED VEC28-12-830-24V-IP65	9955055	Warm White / <i>Blanco Cálido</i>	24	3000	120	65	12	1080	90	>80	12	50	6	5	
eLED VEC28-12-827-24V-IP65	9955056	Comfort White / <i>Blanco Confort</i>	24	2700	120	65	12	1080	90	>80	12	50	6	5	



* Tolerance range for power and lm/m: $\pm 10\%$ / *Rango de tolerancia potencia y lm/m: $\pm 10\%$*

- ~ Protection IP65.
- ~ Energy efficiency up to 115 lm/W.
- ~ Advised to mount on an aluminium profile. See LED profiles from page 153.
- ~ Fast and Easy to stick with 3M adhesive back.
- ~ Working Temperature Range: -20°C to 40°C.

Packaging and weight p. 191 and www.elt.es/productos/packaging_EL.T.pdf
Instructions manual on www.elt.es/productos/inst_manual.html

- ~ Protección IP65.
- ~ Eficiencia energética hasta 115 lm/W.
- ~ Recomendado instalación con perfil disipador de aluminio. Ver perfiles a partir de la página 153.
- ~ Equipado con cinta adhesiva 3M para una fácil y rápida instalación.
- ~ Rango de temperaturas de funcionamiento: -20°C a 40°C.

Embalaje y peso pág. 191 y www.elt.es/productos/embalaje_EL.T.pdf
Manual de instrucciones en www.elt.es/productos/manual_instrucciones.html

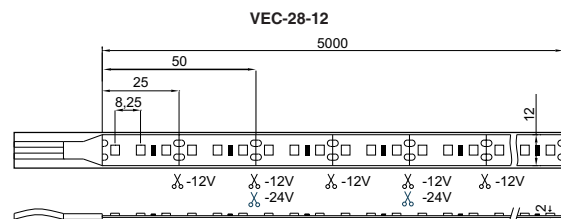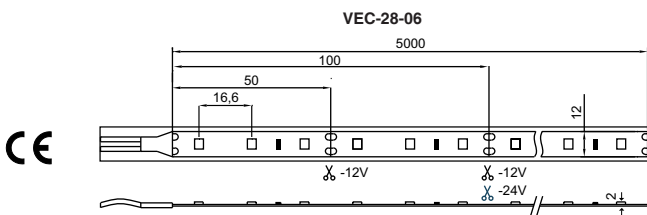

EN 62471 Photobiological safety
Seguridad Fotobiológica
EN 62031 LED modules for general lighting
Módulos led para alumbrado general