



Control gear and lighting control systems

Catalogue 2014



Note This catalogue should only be used as a general guide and is subject to change. Customers are encouraged to contact our sales team to confirm product information and availability.

	page
<b>Magnetic ballasts for fluorescent lamps</b>	
<b>Fluorescent lamps</b>	7
<b>Magnetic ballasts for fluorescent lamps</b>	9
<b>Fluorescent lamp ballast guide</b>	13
<b>Technical tips for fluorescent lamp circuits</b>	14
<b>LLEC low loss ballasts</b>	15
220 V 50 Hz – LLEC low loss ballasts (EEI=B1)	16
220 V 60 Hz – LLEC low loss ballasts	17
230 V 50 Hz – LLEC low loss ballasts (EEI=B1)	18
240 V 50 Hz – LLEC low loss ballasts (EEI=B1)	19
250 V 50 Hz – LLEC low loss ballasts (EEI=B1)	20
<b>B2 low loss ballasts</b>	21
220 V 50 Hz – EC low loss ballasts (EEI=B2)	22
230 V 50 Hz – EC low loss ballasts (EEI=B2)	23
240 V 50 Hz – EC low loss ballasts (EEI=B2)	24
<b>EC energy control ballasts</b>	25
220 V 50 Hz – EC energy control ballasts	26
220 V 60 Hz – EC energy control ballasts	27
220 V 60 Hz – EC energy control ballasts for Taiwan	28
230 V 50 Hz – EC energy control ballasts	29
240 V 50 Hz – EC energy control ballasts	30
250 V 50 Hz – EC energy control ballasts	31
<b>EC optimised ballasts</b>	32
220 V 50 Hz – EC optimised ballasts	33
220 V 60 Hz – EC optimised ballasts	34
230 V 50 Hz – EC optimised ballasts	35
240 V 50 Hz – EC optimised ballasts	36
<b>EC lean ballasts</b>	37
220 V 50 Hz, 220 V 60 Hz and 230 V 50 Hz – EC lean ballasts	38
<b>Minimum Energy Performance Standards (MEPS)</b>	120
Table showing an overview of the Energy Classification System for ballasts from CELMA	121

---

	page
<b>Magnetic ballasts for HID lamps</b>	
<b>HID lamps</b>	
High-pressure mercury vapour (MV) lamps	41
Metal halide (MH) lamps	42
High-pressure sodium vapour (HPS) lamps	44
Low-pressure sodium vapour (LPS) lamps	45
<b>Magnetic ballasts for HID lamps</b>	46
<b>Technical tips for HID lamp circuits</b>	48
<b>Remote assemblies for high-intensity discharge lamps</b>	49
<b>HID lamp ballast guide</b>	50
<b>EC type HID ballasts</b>	
220 V 50 Hz and 220 V 60 Hz – EC ballasts	65
230 V 50 Hz and 240 V 50 Hz – EC ballasts	66
230 V 50 Hz – OM ballasts	67
<b>OM type HID ballasts</b>	
220 V 50 Hz – OM ballasts	68
220 V 60 Hz – OM ballasts	69
230 V 50 Hz – OM ballasts	70
240 V 50 Hz – OM ballasts	71
250 V 50 Hz – OM ballasts	72
<b>OG type HID ballasts</b>	
220 V 50 Hz – OG ballasts	74
220 V 60 Hz – OG ballasts	75
230 V 50 Hz – OG ballasts	76
240 V 50 Hz – OG ballasts	77
250 V 50 Hz – OG ballasts	78
<b>HID lamp remote gear assemblies</b>	
OM PAK assemblies	79
Gear tray assemblies	80
D430 weatherproof assemblies	81
D96 weatherproof assemblies	82
<b>Capacitors</b>	
<b>Capacitors</b>	93
<b>CP parallel lighting capacitors</b>	
280 V capacitors	96
440 V capacitors	97
Mounting accessories	98
<b>Blocking inductors for HPF lighting circuits</b>	99

	page
<b>Magnetic transformers</b>	
<b>Magnetic transformers for low-voltage halogen lamps</b>	103
<b>Technical tips for low-voltage lighting circuits</b>	105
<b>Magnetic transformers</b>	
ECT transformers, 20-100 VA 50/60 Hz	106
OMT transformers, 25-200 VA 50/60 Hz	107
OGT transformers, 180-1200 VA 50/60 Hz	108
<b>Enclosed magnetic transformers</b>	
LVL (D427) indoor transformers, 65-200 VA 50/60 Hz	109
LVL (D490) weatherproof transformers, 50-200 VA 50/60 Hz	110
LVL 48 below ground transformers, 50-200 VA 50/60 Hz	111
LVL (D600) indoor transformers, 250-650 VA 50/60 Hz	112
<b>General information</b>	page
<b>Lamps and lighting control equipment</b>	115
<b>Don't save light – Save energy</b>	117
<b>Energy savings in a commercial building</b>	118
<b>Quality policy</b>	119
<b>Minimum Energy Performance Standards (MEPS)</b>	120
<b>Table showing an overview of the Energy Classification System for ballasts from CELMA</b>	121

Index	page
<b>Fluorescent lamps</b>	7
<b>Magnetic ballasts for fluorescent lamps</b>	9
<b>Fluorescent lamp ballast guide</b>	13
<b>Technical tips for fluorescent lamp circuits</b>	14
<b>LLEC low loss ballasts</b>	15
220 V 50 Hz – LLEC low loss ballasts (EEI=B1)	16
220 V 60 Hz – LLEC low loss ballasts	17
230 V 50 Hz – LLEC low loss ballasts (EEI=B1)	18
240 V 50 Hz – LLEC low loss ballasts (EEI=B1)	19
250 V 50 Hz – LLEC low loss ballasts (EEI=B1)	20
<b>B2 low loss ballasts</b>	21
220 V 50 Hz – EC low loss ballasts (EEI=B2)	22
230 V 50 Hz – EC low loss ballasts (EEI=B2)	23
240 V 50 Hz – EC low loss ballasts (EEI=B2)	24
<b>EC energy control ballasts</b>	25
220 V 50 Hz – EC energy control ballasts	26
220 V 60 Hz – EC energy control ballasts	27
220 V 60 Hz – EC energy control ballasts for Taiwan	28
230 V 50 Hz – EC energy control ballasts	29
240 V 50 Hz – EC energy control ballasts	30
250 V 50 Hz – EC energy control ballasts	31
<b>EC optimised ballasts</b>	32
220 V 50 Hz – EC optimised ballasts	33
220 V 60 Hz – EC optimised ballasts	34
230 V 50 Hz – EC optimised ballasts	35
240 V 50 Hz – EC optimised ballasts	36
<b>EC lean ballasts</b>	37
220 V 50 Hz, 220 V 60 Hz and 230 V 50 Hz – EC lean ballasts	38
<b>Minimum Energy Performance Standards (MEPS)</b>	120
Table showing an overview of the Energy Classification System for ballasts from CELMA	121

# Fluorescent lamps

## Operation

A fluorescent lamp is a type of low pressure mercury discharge lamp. A discharge arc operates in a glass tube internally coated with a phosphor powder. The electrical discharge produces mostly ultraviolet and some blue and green light. The phosphor coating converts the ultraviolet energy produced by the discharge into light. Cathodes, coated with an electron emitting material are sealed into each end of the glass envelope and connected to the pins of the lamp caps. The lamp contains gases such as argon and krypton with a drop of liquid mercury.

A control circuit is required which first causes an electric current to flow through each cathode. When the cathode filaments are heated, the emitter coating emits a cloud of electrons, which are negatively charged. The electrons are accelerated by a voltage applied across the lamp, producing ionisation. The current flow through the lamp is then limited by the external control circuit.


The inert gas used in traditional fluorescent lamps is argon, krypton or a mixture of both. The improvement in efficacy achieved using krypton offers a power saving approaching 8% which translates directly into lower energy costs.

## Flicker

Fluorescent lamps typically exhibit very little flicker (flicker factor 0.5% or less). However, stroboscopic effects from rotating parts or parts with reciprocal motion can cause problems. These can be reduced by connecting lamps to different phases or by the use of lead-lag circuits or electronic (high frequency) ballasts.

## Electrical measurements

All electrical measurements on lamp or circuit voltage, current and wattage have to be made with instruments of the true RMS type allowing for crest factors of up to 2.5.

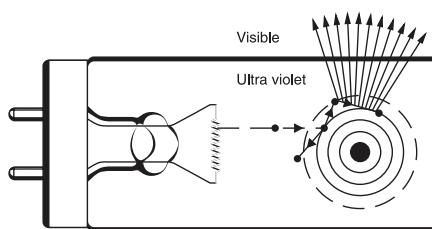

De-activation of excited mercury atoms produce UV photon and is converted to visible light by the internal phosphor coating of the fluorescent lamp.

## Operating performance

The performance of a fluorescent lamp is dependent upon not only the control circuit, but also on the ambient temperature. This influences the gas pressure in the lamp which in turn determines the yield of UV radiation.


The optimum light output occurs when the lamp wall temperature is approximately 40°C ( for T8 / T12 lamps) at the cold spot (fig.1 ).

This highlights the problems encountered in brightness control of fluorescent lamps if widely varying ambient temperatures prevail. It also shows that high open circuit voltages are required to reliably start the lamp in low temperature conditions ( fig. 2 ).

The more reliable starting, however, of control gear with high open circuit voltages is negated by the increased probability of cold starts occurring. "Cold start" is striking the arc before the cathodes are fully heated. It has a detrimental effect on lamp life and, coupled with frequent switching, can reduce lamp life to one quarter or less. "Cold starts" are more likely to occur with lamps of low operating voltage, such as 18W 600 mm lamp with only 57V across the lamp. The life of a fluorescent lamp is dependent to a certain degree on the frequency of switching on and off. A lamp which is switched infrequently will last considerably longer ( fig. 3 ).


The effect of mains voltage variations on the operating characteristics of fluorescent lamps is indicated in the graph ( fig. 4 ). Increases in the mains voltage can influence lamp life in proportion to the increases in the lamp current.

Fig. 1

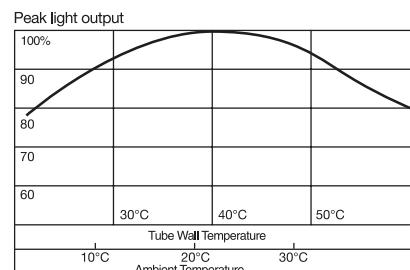


Typical relationship between temperature and lumen output

Fig. 2

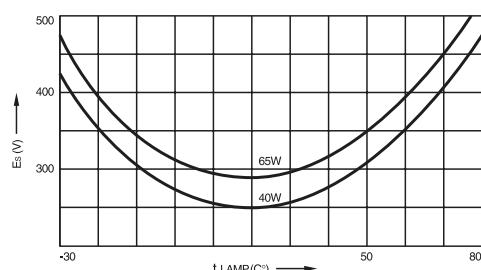

Start voltage versus ambient temperature


Fig. 3

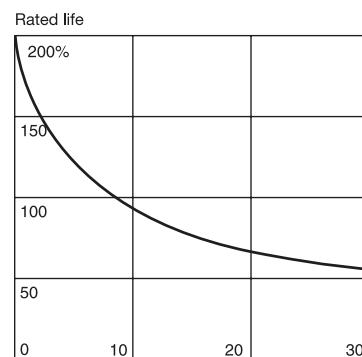

Frequency of Switching per 24 hrs.

Typical effect on life of switching

Fig. 4

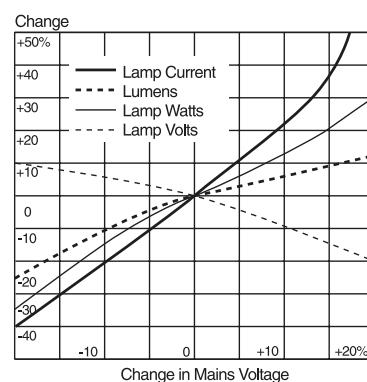

# Magnetic ballasts for fluorescent lamps



A ballast is required to run a fluorescent lamp. This is a current limiting device which works on the self inductance principle. The impedance of the ballast is set to match the arc voltage of the lamp which ensures that the correct current is supplied. In some cases a ballast can be used for more than one lamp but the lamp should never be used with any other ballast than the one specifically designed for the job. Also any supply voltage or frequency variation will affect the optimum performance of the ballast, and hence the lamp, so the type with the correct values should always be used.

## Optimum performance

This is achieved by maintaining careful control of the main parameters.

## Preheat current

This is supplied to the cathodes prior to the striking voltage. Without the correct preheat current, the cathodes would be progressively damaged resulting in short lamp life.

## Strike voltage

In the case of a glow starter, this is produced by the ballast when the starter switch opens. The required voltage increases at high and low temperatures, and electronic starters may be required in abnormal temperature conditions.

For a fluorescent lamp to operate constantly the supply voltage must be at least twice the lamp voltage. If it is less, then an auto transformer is required to step up the voltage.

## Lamp current

The tight tolerances used in manufacture ensure that the impedance is the correct value for the correct lamp current and hence lamp wattage and luminous flux.

## Minimum power losses

An inefficient ballast means high losses, which in turn leads to high temperatures. This means the lamp runs out of its optimum temperature range and, in some cases, other components in the luminaire, such as capacitors, will also run too hot and fail prematurely.

CMP have designed ballasts with minimal losses through the optimum use of windings within the bobbin. They have compact dimensions and use the highest quality materials in their manufacture.

The losses ( lamp and ballast ) are rated in accordance with the ballast-lamp circuit ( EEI ) classification.

## Selection of the right ballast

CMP offers ballasts in the following energy classes:

- standard ( EEI = C )
- low loss ( EEI = B2 )
- low loss ( EEI = B1 )

Each version has the same impedance and provides the same lamp current. The difference is that the losses, and temperature rise, are progressively less, which can be seen from the data.

There are two reasons to select lower loss ballasts:

- Energy consumption

A low loss B2 ballast typically consumes 30% less power than a standard C ballast, and a low loss B1 ballast uses 67% less power than a standard C ballast.

- Temperature rise

A typical standard C ballast will increase in temperature by 55K ( Kelvin ) above its surroundings, a low loss B2 ballast 35 - 40K and a low loss B1 ballast 25K.

When considering dimensions, CMP ballasts have optimised dimensions to minimise losses but lower loss ballasts do have increased dimensions.

As the measured power consumption depends strongly on the method of measurement, differences up to 10K are possible in the results.


### Long service life

The choice of insulating materials and their operating temperatures determine the ballast life. CMP ballasts use class H insulation materials which are designed for temperatures up to 180°C, thus ensuring maximum service life.

The permitted maximum working temperature of the winding is designated "tw". The adherence to this temperature guarantees an average life of 10 years continuous usage. If the temperature in application is lower, then the life is correspondingly higher.

The designation  $\Delta t$  is the temperature rise in degrees Celsius operating under prescribed conditions at rated voltage and is a function of ballast power losses.

The difference between the "tw" rating and  $\Delta t$  is an indication of the ambient temperature in which the ballast can operate. This is a very important consideration.

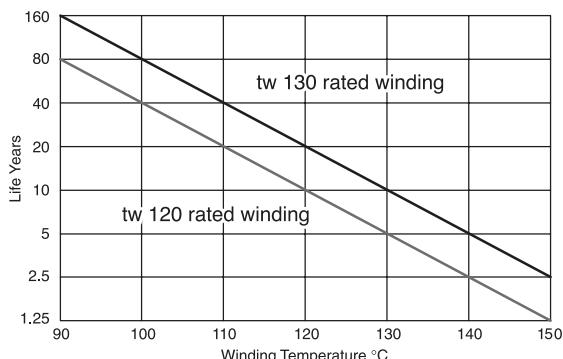

The graph shows the theoretical service life of a ballast against winding temperature. Every 10°C over the maximum winding temperature of 130°C (tw130) halves ballast life. The winding temperature is the ambient temperature plus  $\Delta t$  or temperature rise which is a function of ballast power consumption (watts loss).

The high quality and reliability of insulated conductors is dependent not only on the production process, but also on the choice of raw materials. Many years of experience, both as a user and manufacturer of enamelled winding wire has given CMP the knowledge and expertise to select the best raw materials from internationally approved suppliers.

The copper is made from a high conductivity hot rolled copper rod and complies with the chemical composition limits and resistivity requirements of International Registered Alloy Designation 110.

Critical attention is paid to the enamel as the material utilised to insulate the conductor. Choice of enamel is a key factor and is linked both to the enamelling system as well as the electrical, mechanical and technical characteristics of the finished product.

The insulation enamels specified by CMP controls are supplied by internationally approved manufacturers specialising within this field. For all CMP ballasts insulation Class H+ (200°C) is used.

### Minimum stray fields

CMP ballasts are designed to keep stray fields at a minimum, thus enabling them to be used near sensitive equipment.

### Consistent high quality

Certified to ISO 9001, the production process and equipment guarantee a consistent high quality standard. All finished goods are 100% end of line tested and only the highest quality raw materials are used. Consistent high quality is ensured by the use of fully automatic production.

### Special features of CMP ballasts:

- very short magnetic paths
- transverse lamination design with no stray field junctions
- compact windings
- low power consumption
- short heat paths
- maximum winding temperature  $t_w = 130^\circ\text{C}$
- class H insulation
- fully automatic production with continuous tolerance test
- varnish impregnation
- 100 % final testing, including continuity, high voltage, winding short-circuit and operating values
- long service life

### National and international test marks

CMP ballasts are approved by national and international test houses.

### Switch start circuit

The most widely used circuit. It is simple, economical and one of the most efficient ways of operating a fluorescent lamp. The starter can be of the glow switch type or electronic. By far the most common is the glow starter. When the starter contacts open, the ballast supplies the starting voltage.

#### Advantages:

- simple wiring
- low temperature operation (to -10°C )
- economical

#### Disadvantages:

- flicker on start-up
- short delay in striking
- more than 1 wear part ( lamp and starter )

#### The operating sequence is as follows:

1. When power is switched on, mains voltage appears across the contacts in the starter bottle, striking an arc between them.

2. The heat of the arc causes the bi-metal contact to bend and make contact with the other contact thereby extinguishing the arc and removing the heat source.

The ballast and the lamp cathodes are now connected in series across the supply and the relatively heavy pre-heat current flows, heating the lamp cathodes.

3. The starter contact cools down and re-opens.

The sudden interruption of the pre-heat current causes a voltage spike to develop which ignites the lamp.

Lamp voltage of less than half supply voltage is now insufficient to re-strike the arc in the starter bottle and the lamp remains alight.

Switch start circuits provide reliable starting in ambient temperatures -10 to +50°C.

FS2 type starters are used in single and twin lamp circuits up to and including 20W.

FSU type starters are used in single lamp circuits to 80 W. Note that 85 and 125W lamps require very special starters.

Electronic starters are far more complex. They provide rapid start precision operation of the lamp.







### Twin series circuit

A circuit used for most lamps up to 20W. Two fluorescent lamps are run in series on one ballast but with individual starters operating per lamp.

## Fluorescent lamp ballast guide


Fluorescent lamps have combined the technology and sophistication of fluorescent lighting with the compact convenience of incandescent light fittings.

CMP offers a comprehensive range of standard EC energy control ballasts as well as LLEC low loss ballasts designed to operate compact fluorescent lamps from 5 through to 38W.


Lamp	Code	Wattage	Length	Cap	Nominal current	Standard ballast	Low loss ballast
T5-Lamp 16 mm 	FD-4	4 W	150 mm	G5	170 mA	EC 4/6/8	LLEC 4/6/8
	FD-6	6 W	225 mm	G5	160 mA	EC 4/6/8	LLEC 4/6/8
	FD-6	2x6 W	225 mm	G5	160 mA	EC 13	LLEC 13
	FD-8	8 W	300 mm	G5	145 mA	EC 4/6/8	LLEC 4/6/8
	FD-8	2x8 W	300 mm	G5	145 mA	EC 13	LLEC 13
	FD-13	13 W	525 mm	G5	165 mA	EC 13	LLEC 13
T8-Lamp 26 mm 	FD-10	10 W	330 mm	G13	230 mA	EC 10	LLEC 10
	FD-15	15 W	450 mm	G13	310 mA	EC 15	LLEC 15
	FD-15	2x15 W	450 mm	G13	310 mA	EC 30	LLEC 30
	FD-18	18 W	600 mm	G13	370 mA	EC 18/20	LLEC 18/20
	FD-18	2x18 W	600 mm	G13	370 mA	EC 36/40	LLEC 36/40
	FD-30	30 W	900 mm	G13	365 mA	EC 30	LLEC 30
T12-Lamp 38 mm 	FD-36	36 W	1,200 mm	G13	430 mA	EC 36/40	LLEC 36/40
	FD-58	58 W	1,500 mm	G13	670 mA	EC 58/65	LLEC 58/65
	FD-20	20 W	600 mm	G13	370 mA	EC 18/20	LLEC 18/20
	FD-20	2x20 W	600 mm	G13	370 mA	EC 36/40	LLEC 36/40
	FD-40	40 W	1,200 mm	G13	430 mA	EC 36/40	LLEC 36/40
	FD-65	65 W	1,500 mm	G13	670 mA	EC 58/65	LLEC 58/65
T8-Circline 26 mm 	FC-22	22 W	Ø 210 mm	G10q	400 mA	EC 22	LLEC 22
	FC-32	32 W	Ø 305 mm	G10q	450 mA	EC 32	LLEC 32
	FC-40	40 W	Ø 406 mm	G10q	420 mA	EC 36/40	LLEC 36/40
TC-S and TC-L 	FSD-5	5 W	TC-S	2G7 / G23	180 mA	EC 9	LLEC 9
	FSD-5	2x5 W	TC-S	2G7 / G23	180 mA	EC 13	LLEC 13
	FSD-7	7 W	TC-S	2G7 / G23	175 mA	EC 9	LLEC 9
	FSD-7	2x7 W	TC-S	2G7 / G23	175 mA	EC 13	LLEC 13
	FSD-9	9 W	TC-S	2G7 / G23	170 mA	EC 9	LLEC 9
	FSD-9	2x9 W	TC-S	2G7 / G23	170 mA	EC 13	LLEC 13
	FSD-11	11 W	TC-S	2G7 / G23	155 mA	EC 9	LLEC 9
	FSD-18	18 W	TC-L	2G11	375 mA	EC 18/20	LLEC 18/20
	FSD-18	2x18 W	TC-L	2G11	375 mA	EC 36/40	LLEC 36/40
	FSD-24	24 W	TC-L	2G11	345 mA	EC 18/20	LLEC 18/20
TC-D 	FSD-36	36 W	TC-L	2G11	435 mA	EC 36/40	LLEC 36/40
	FSQ-10	10 W	TC-D	G24q-1	190 mA	EC 13	LLEC 13
	FSQ-13	13 W	TC-D	G24q-1	175 mA	EC 13	LLEC 13
	FSQ-18	18 W	TC-D	G24q-1	220 mA	EC 18H	LLEC 18H
TC-T 	FSQ-26	26 W	TC-D	G24q-1	325 mA	EC 18/20	LLEC 18/20
	FSM-10	10 W	TC-T	GX24q-1	190 mA	EC 13	LLEC 13
	FSM-13	13 W	TC-T	GX24q-1	175 mA	EC 13	LLEC 13
	FSM-18	18 W	TC-T	GX24q-1	225 mA	EC 18H	LLEC 18H
TC-DD 2D-lamp 	FSM-26	26 W	TC-T	GX24q-1	325 mA	EC 18/20	LLEC 18/20
	FSS-10	10 W	TC-DD	GR10q	180 mA	EC 13	LLEC 13
	FSS-16	16 W	TC-DD	GR10q	195 mA	EC 16	LLEC 16
	FSS-21	21 W	TC-DD	GR10q	260 mA	EC 21	LLEC 21
TC-F flat 	FSS-28	28 W	TC-DD	GR10q	320 mA	EC 18/20	LLEC 18/20
	FSS-38	38 W	TC-DD	GR10q	430 mA	EC 36/40	LLEC 36/40
	FSS-18	18 W	TC-F	2G10	375 mA	EC 18/20	LLEC 18/20
	FSS-18	2x18 W	TC-F	2G10	375 mA	EC 36/40	LLEC 36/40
FSS-24	24 W	TC-F	2G10	345 mA	EC 18/20	LLEC 18/20	
	36 W	TC-F	2G10	435 mA	EC 36/40	LLEC 36/40	

## Technical tips for fluorescent lamp circuits



Symptom	Possible fault	Test and remedy
Tube does not attempt to strike – no end glow from tube	Fuse blown	Check supply voltage – replace broken fuse
	Supply fault	Check supply volts and circuit fuse
	Faulty starter	Test starter switch in sound fitting
	Faulty tube	Test tube in sound fitting. NOTE: If one or both cathodes are broken, check for faulty circuit (short circuit to earth or wrong control gear) before inserting new tube.
	Open circuit	Test for open-circuit on ballast etc, or short to earth between ballast and tube
Tube fails to strike – bright glow from one end of tube	Crossed leads in twin tube fitting	Check that the correct lampholders are connected to each tube – leads connected to a given tube should have the same colour
	Short-circuit on lampholder lead	Test for short-circuit across lampholder lead or for short-circuit to earth on starter switch or wiring
Tube does not attempt to strike – both ends of tube glow brightly	Short-circuit on starter switch or associated wiring	Test starter switch in sound fitting. If satisfactory, test switch socket and wiring for short-circuit.
Tube flashes on and off	Faulty tube (end of life)	Check tube in sound fitting. At end of life, the lamp fails to maintain discharge. Symptoms are reduced light output, increased flicker and reddish glow from cathodes.
	Low voltage or incorrect ballast rating	Test supply voltage at fitting-if low, check external wiring for excessive voltage drop (fuseholders, etc.) If "sustained" voltage at the fitting is persistently low, use lower voltage rated ballast.
	Faulty starter	Test starter switch in sound fitting
	Low temperature	Screen open type fittings
	Crossed leads in twin tube fitting	Check that correct lampholders are connected to each tube, i.e. leads connected to a given tube should have the same colour.
Lamp takes a long time to light	Some period is needed to start the lamp after switching on	Measure the period. 2 to 6 seconds is normal
	Supply voltage is low due to: a) Overload on line. b) Lower voltage supplied.	Check the line voltage and conditions
	The lamp quality is poor	Test with a known good lamp
The lamp repeats on-off operation	Supply voltage is low	Check supply voltage with multimeter
	Incorrect wiring occurs in the apparatus	Check the wiring condition
	The lamp or the glow starter is damaged because of end of life	Test with a known good lamp
	Poor contact between lamp pins in lampholders	Check the lamp contact condition
Excessive blackening at the end (or both ends) of a lamp is found	The supply voltage doesn't match the ballast rating	Check the supply voltage with a multimeter
	Incorrect wiring in fitting or between the supply and fitting	Check the wire connecting condition
	Too many switching operations of the lamp have been performed	The lamp or the ballast has failed. Change the lamp or the ballast with replacement and observe for a time.

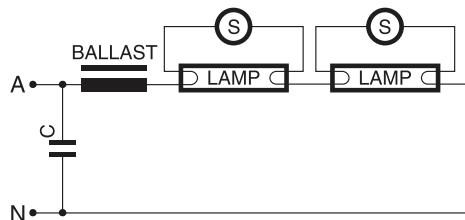

Twin series circuit

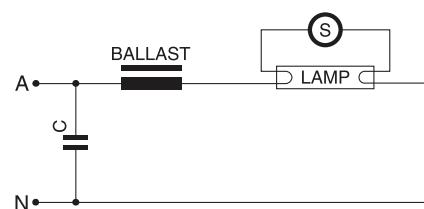

Switch start circuit

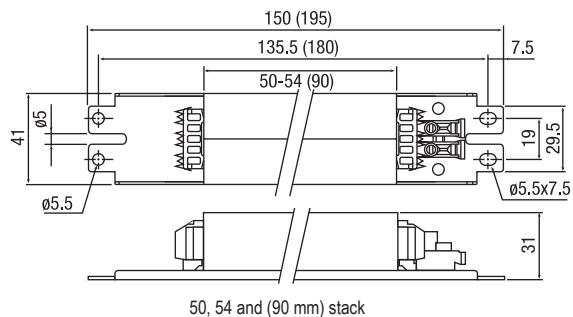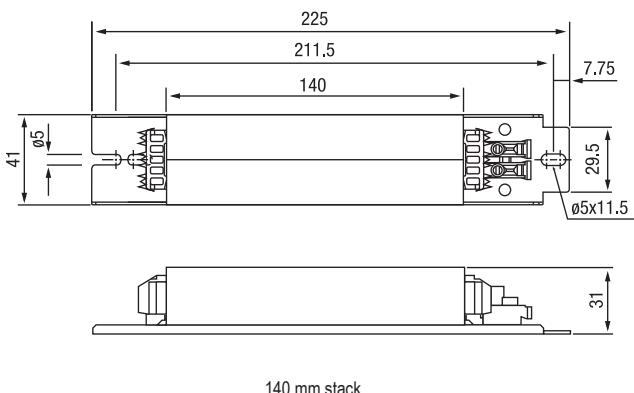**LLEC low loss ballasts****figure 1****figure 2**

- low power consumption
- slim cross-section and compact
- low loss core laminations
- low magnetic stray field
- long service life
- vacuum impregnation
- non-audible noise level
- nomex class "H" gap for fixed calibration
- resistant to moisture and corrosion
- 10 A push-in terminals (screw terminals on request)
- maximum winding temperature tw 130 °C Low temperature rise
- other supply voltages than listed are available i.e. 120 V, 277 V etc.

**100 % final testing**

- continuity
- winding short circuit
- core to coil high voltage test
- operating values

**220 V 50 Hz – LLEC low loss ballasts (EEI=B1)**

Lamp				Ballast	Electrical								Thermal	Physical					
wattage	voltage	current	length	type	article number	loss hot W	input power W	lamp current mA	lamp start current mA	circuit PF cosφ	line current mA@0.9PF	line start current mA@0.9PF	capacitor μF@0.9PF	normal/ abnormal Δt	stack mm	figure	length mm	mtg centres mm	weight kg
<b>Linear and circular lamps</b>																			
4	29	170	150	LLEC4/6/8		3.3	7.8	165	170	0.21	39	43	3.0	25/35	50	1	150.0	135.5	0.55
6	42	160	225	LLEC4/6/8		3.1	9.1	155	170	0.27	46	53	2.0	25/35	50	1	150.0	135.5	0.55
2x6	42	160	225	LLEC13		3.0	15.0	160	200	0.43	76	99	2.0	25/35	50	1	150.0	135.5	0.55
8	56	145	300	LLEC4/6/8		2.9	10.0	145	170	0.31	51	62	2.0	25/35	50	1	150.0	135.5	0.55
2x8	56	145	300	LLEC13		2.7	16.9	145	200	0.53	85	124	1.5	25/35	50	1	150.0	135.5	0.55
10	49	230	330	LLEC10*		4.5	14.5	230	275	0.29	73	92	3.0	30/40	50	1	150.0	135.5	0.55
13	95	165	525	LLEC13		3.1	16.1	165	200	0.44	81	103	2.0	25/35	50	1	150.0	135.5	0.55
15	55	310	450	LLEC15	EEI=B1	20.0	310	360	0.29	101	123	4.0	30/40	50	1	150.0	135.5	0.55	
18	57	370	600	LLEC18/20	EEI=B1	23.5	370	415	0.29	119	140	5.0	25/40	90	1	195.0	180.0	1.00	
2x18	57	370	600	LLEC36/40		4.7	40.7	370	495	0.50	206	289	3.5	25/50	90	1	195.0	180.0	1.00
20	57	370	600	LLEC18/20		5.5	24.8	370	415	0.30	125	148	5.0	25/40	90	1	195.0	180.0	1.00
2x20	57	370	600	LLEC36/40		4.7	43.3	370	495	0.53	219	307	3.5	25/50	90	1	195.0	180.0	1.00
22	62	400	Ø210	LLEC22		6.5	28.5	400	440	0.32	144	166	5.0	35/50	90	1	195.0	180.0	1.00
30	96	365	900	LLEC30	EEI=B1	35.9	365	440	0.45	181	230	4.0	35/50	90	1	195.0	180.0	1.00	
32	81	450	Ø305	LLEC32		7.0	39.0	430	520	0.41	197	250	5.0	40/70	90	1	195.0	180.0	1.00
32	135	265	1,200	LLEC32H*		3.0	33.5	265	435	0.57	169	292	3.0	15/30	90	1	195.0	180.0	1.00
36	103	430	1,200	LLEC36/40	EEI=B1	41.5	415	625	0.45	210	331	4.0	30/60	90	1	195.0	180.0	1.00	
40	103	430	1,200	LLEC36/40		5.5	45.0	415	625	0.49	227	359	4.0	30/60	90	1	195.0	180.0	1.00
58	110	670	1,500	LLEC58/65	EEI=B1	66.0	660	1,130	0.45	333	599	7.0	35/70	140	2	225.0	211.5	1.40	
65	110	670	1,500	LLEC58/65		8.0	72.0	660	1,130	0.50	364	654	6.0	35/70	140	2	225.0	211.5	1.40
<b>Compact lamps</b>																			
5	35	180	TC-S	LLEC9		EEI=B1	8.8	180	180	0.22	44	47	3.0	30/35	50	1	150.0	135.5	0.55
2x5	35	180	TC-S	LLEC13		3.3	14.1	175	200	0.37	71	85	2.0	25/35	50	1	150.0	135.5	0.55
7	47	175	TC-S	LLEC9	EEI=B1	10.4	175	180	0.27	53	57	3.0	30/35	50	1	150.0	135.5	0.55	
2x7	47	175	TC-S	LLEC13		3.1	17.3	165	200	0.48	87	111	1.5	25/35	50	1	150.0	135.5	0.55
9	60	170	TC-S	LLEC9	EEI=B1	11.8	165	180	0.33	60	68	2.0	30/35	50	1	150.0	135.5	0.55	
2x9	60	170	TC-S	LLEC13		2.9	20.7	155	200	0.61	105	142	1.5	25/35	50	1	150.0	135.5	0.55
10	64	190	TC-D	LLEC13	EEI=B1	13.5	185	200	0.33	68	77	3.0	25/35	50	1	150.0	135.5	0.55	
10	72	180	TC-DD	LLEC13	EEI=B1	13.8	175	200	0.36	70	84	2.0	25/35	50	1	150.0	135.5	0.55	
11	91	155	TC-S	LLEC9	EEI=B1	14.7	155	180	0.43	74	91	2.0	30/35	50	1	150.0	135.5	0.55	
13	91	175	TC-D	LLEC13	EEI=B1	16.2	170	200	0.43	82	101	2.0	25/35	50	1	150.0	135.5	0.55	
13	91	175	TC-T	LLEC13	EEI=B1	16.2	170	200	0.43	82	101	2.0	25/35	50	1	150.0	135.5	0.55	
16	103	195	TC-DD	LLEC16	EEI=B1	19.3	195	200	0.45	97	105	2.0	25/35	50	1	150.0	135.5	0.55	
18	100	220	TC-D	LLEC18H	EEI=B1	22.1	220	290	0.46	112	154	3.0	40/50	50	1	150.0	135.5	0.55	
18	58	375	TC-F	LLEC18/20	EEI=B1	23.5	370	415	0.29	119	140	5.0	25/40	90	1	195.0	180.0	1.00	
18	58	375	TC-L	LLEC18/20	EEI=B1	23.5	370	415	0.29	119	140	5.0	25/40	90	1	195.0	180.0	1.00	
18	100	225	TC-T	LLEC18H	EEI=B1	22.1	220	290	0.46	112	154	3.0	40/50	50	1	150.0	135.5	0.55	
2x18	58	375	TC-L	LLEC36/40		4.7	40.7	370	495	0.50	206	289	3.5	25/50	90	1	195.0	180.0	1.00
24	87	345	TC-F	LLEC18/20	EEI=B1	28.9	345	415	0.38	146	184	4.0	25/40	90	1	195.0	180.0	1.00	
24	87	345	TC-L	LLEC18/20	EEI=B1	28.9	345	415	0.38	146	184	4.0	25/40	90	1	195.0	180.0	1.00	
26	105	325	TC-D	LLEC18/20	EEI=B1	30.2	315	415	0.44	153	211	3.5	25/40	90	1	195.0	180.0	1.00	
26	105	325	TC-T	LLEC18/20	EEI=B1	30.7	315	415	0.44	155	215	3.5	25/40	90	1	195.0	180.0	1.00	
28	108	320	TC-DD	LLEC18/20	EEI=B1	32.6	315	410	0.47	165	225	3.0	25/50	90	1	195.0	180.0	1.00	
36	106	435	TC-F	LLEC36/40	EEI=B1	41.5	415	625	0.45	210	331	4.0	30/60	90	1	195.0	180.0	1.00	
36	106	435	TC-L	LLEC36/40	EEI=B1	41.5	415	625	0.45	210	331	4.0	30/60	90	1	195.0	180.0	1.00	
38	110	430	TC-DD	LLEC36/40	EEI=B1	44.0	415	625	0.48	222	351	4.0	30/60	90	1	195.0	180.0	1.00	

## Notes

Other wattages available on request.

\* Lamps not included in IEC 60081 or IEC 60901.

Refer to Energy Classification System table for ballasts from CELMA and/or MEPS.

**220 V 60 Hz – LLEC low loss ballasts**

Lamp				Ballast	Electrical									Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot W	input power W	lamp current mA	lamp start current mA	circuit PF cosφ	line current mA@0.9PF	line start current mA@0.9PF	capacitor μF@0.9PF	normal/ abnormal Δt	stack mm	figure	length mm	mtg centres mm	weight kg
W	V	mA	mm																

**Linear and circular lamps**

4	29	170	150	LLEC4/6/8		3.3	7.8	165	170	0.21	39	43	2.0	25/35	50	1	150.0	135.5	0.55
6	42	160	225	LLEC4/6/8		3.1	9.1	155	170	0.27	46	53	2.0	25/35	50	1	150.0	135.5	0.55
2x6	42	160	225	LLEC13		3.0	15.0	160	200	0.43	76	99	1.5	25/35	50	1	150.0	135.5	0.55
8	56	145	300	LLEC4/6/8		2.9	10.0	145	170	0.31	51	62	1.5	25/35	50	1	150.0	135.5	0.55
2x8	56	145	300	LLEC13		2.7	16.9	145	200	0.53	85	124	1.5	25/35	50	1	150.0	135.5	0.55
10	49	230	330	LLEC10*		4.5	14.5	230	275	0.29	73	92	3.0	30/40	50	1	150.0	135.5	0.55
13	95	165	525	LLEC13		3.1	16.1	165	200	0.44	81	103	1.5	25/35	50	1	150.0	135.5	0.55
15	55	310	450	LLEC15		5.0	20.0	310	360	0.29	101	123	3.0	30/40	50	1	150.0	135.5	0.55
18	57	370	600	LLEC18/20		6.0	24.0	360	400	0.30	121	141	3.5	40/60	50	1	150.0	135.5	0.55
2x18	57	370	600	LLEC36/40		4.7	40.7	370	495	0.50	206	289	3.0	25/50	90	1	195.0	180.0	1.00
20	57	370	600	LLEC18/20		6.0	25.3	360	400	0.32	128	149	3.5	40/60	50	1	150.0	135.5	0.55
2x20	57	370	600	LLEC36/40		4.7	43.3	370	495	0.53	219	307	3.0	25/50	90	1	195.0	180.0	1.00
22	62	400	Ø210	LLEC22		6.5	28.5	400	440	0.32	144	166	4.0	35/50	90	1	195.0	180.0	1.00
30	96	365	900	LLEC30		5.9	35.9	365	440	0.45	181	230	3.0	35/50	90	1	195.0	180.0	1.00
32	81	450	Ø305	LLEC32		7.0	39.0	430	520	0.41	197	250	4.0	40/70	90	1	195.0	180.0	1.00
32	135	265	1,200	LLEC32H*		3.0	33.5	265	435	0.57	169	292	2.0	15/30	90	1	195.0	180.0	1.00
36	103	430	1,200	LLEC36/40		5.5	41.5	415	625	0.45	210	331	3.5	30/60	90	1	195.0	180.0	1.00
40	103	430	1,200	LLEC36/40		5.5	45.0	415	625	0.49	227	359	3.5	30/60	90	1	195.0	180.0	1.00
58	110	670	1,500	LLEC58/65		8.0	66.0	660	1,130	0.45	333	599	6.0	35/70	140	2	225.0	211.5	1.40
65	110	670	1,500	LLEC58/65		8.0	72.0	660	1,130	0.50	364	654	5.0	35/70	140	2	225.0	211.5	1.40

**Compact lamps**

5	35	180	TC-S	LLEC9	89003647	3.4	8.8	180	180	0.22	44	47	2.0	30/35	50	1	150.0	135.5	0.55
2x5	35	180	TC-S	LLEC13		3.3	14.1	175	200	0.37	71	85	2.0	25/35	50	1	150.0	135.5	0.55
7	47	175	TC-S	LLEC9	89003647	3.3	10.4	175	180	0.27	53	57	2.0	30/35	50	1	150.0	135.5	0.55
2x7	47	175	TC-S	LLEC13		3.1	17.3	165	200	0.48	87	111	1.5	25/35	50	1	150.0	135.5	0.55
9	60	170	TC-S	LLEC9	89003647	3.1	11.8	165	180	0.33	60	68	2.0	30/35	50	1	150.0	135.5	0.55
2x9	60	170	TC-S	LLEC13		2.9	20.7	155	200	0.61	105	142	1.5	25/35	50	1	150.0	135.5	0.55
10	64	190	TC-D	LLEC13		3.5	13.5	185	200	0.33	68	77	2.0	25/35	50	1	150.0	135.5	0.55
10	72	180	TC-DD	LLEC13		3.3	13.8	175	200	0.36	70	84	2.0	25/35	50	1	150.0	135.5	0.55
11	91	155	TC-S	LLEC9	89003647	2.9	14.7	155	180	0.43	74	91	1.5	30/35	50	1	150.0	135.5	0.55
13	91	175	TC-D	LLEC13		3.2	16.2	170	200	0.43	82	101	1.5	25/35	50	1	150.0	135.5	0.55
13	91	175	TC-T	LLEC13		3.2	16.2	170	200	0.43	82	101	1.5	25/35	50	1	150.0	135.5	0.55
16	103	195	TC-DD	LLEC16		3.3	19.3	195	200	0.45	97	105	2.0	25/35	50	1	150.0	135.5	0.55
18	100	220	TC-D	LLEC18H		4.1	22.1	220	290	0.46	112	154	2.0	40/50	50	1	150.0	135.5	0.55
18	58	375	TC-F	LLEC18/20		6.0	24.0	360	400	0.30	121	141	3.5	40/60	50	1	150.0	135.5	0.55
18	58	375	TC-L	LLEC18/20		6.0	24.0	360	400	0.30	121	141	3.5	40/60	50	1	150.0	135.5	0.55
18	100	225	TC-T	LLEC18H		4.1	22.1	220	290	0.46	112	154	2.0	40/50	50	1	150.0	135.5	0.55
2x18	58	375	TC-L	LLEC36/40		4.7	40.7	370	495	0.50	206	289	3.0	25/50	90	1	195.0	180.0	1.00
24	87	345	TC-F	LLEC18/20		5.5	29.5	345	400	0.39	149	182	3.0	40/60	50	1	150.0	135.5	0.55
24	87	345	TC-L	LLEC18/20		5.5	29.5	345	400	0.39	149	182	3.0	40/60	50	1	150.0	135.5	0.55
26	105	325	TC-D	LLEC18/20		4.6	30.6	315	400	0.44	155	206	3.0	40/60	50	1	150.0	135.5	0.55
26	105	325	TC-T	LLEC18/20		4.6	31.1	315	400	0.45	157	209	3.0	40/60	50	1	150.0	135.5	0.55
28	108	320	TC-DD	LLEC18/20		4.6	33.0	315	410	0.48	167	228	3.0	40/60	50	1	150.0	135.5	0.55
36	106	435	TC-F	LLEC36/40		5.5	41.5	415	625	0.45	210	331	3.5	30/60	90	1	195.0	180.0	1.00
36	106	435	TC-L	LLEC36/40		5.5	41.5	415	625	0.45	210	331	3.5	30/60	90	1	195.0	180.0	1.00
38	110	430	TC-DD	LLEC36/40		5.5	44.0	415	625	0.48	222	351	3.5	30/60	90	1	195.0	180.0	1.00

## Notes

Other wattages available on request.

\* Lamps not included in IEC 60081 or IEC 60901.

**230 V 50 Hz – LLEC low loss ballasts (EEI=B1)**

Lamp				Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot W	input power W	lamp current mA	lamp start current mA	circuit PF cosφ	line current mA@0.9PF	line start current mA@0.9PF	capacitor μF@0.9PF	normal/ abnormal Δt	stack mm	figure mm	length mm	mtg centres mm	weight kg

**Linear and circular lamps**

4	29	170	150	LLEC4/6/8		3.4	7.9	165	170	0.21	38	41	2.0	25/35	50	1	150.0	135.5	0.55
6	42	160	225	LLEC4/6/8		3.2	9.2	155	170	0.26	44	51	2.0	25/35	50	1	150.0	135.5	0.55
2x	42	160	225	LLEC13		3.1	15.1	160	205	0.41	73	98	2.0	25/40	50	1	150.0	135.5	0.55
8	56	145	300	LLEC4/6/8		3.0	10.1	145	170	0.30	49	60	2.0	25/35	50	1	150.0	135.5	0.55
2x8	56	145	300	LLEC13		2.8	17.0	145	205	0.51	82	122	1.5	25/40	50	1	150.0	135.5	0.55
10	49	230	330	LLEC10*		4.8	14.8	230	280	0.28	71	91	3.0	30/40	50	1	150.0	135.5	0.55
13	95	165	525	LLEC13		3.2	16.2	165	205	0.43	78	102	2.0	25/40	50	1	150.0	135.5	0.55
15	55	310	450	LLEC15		EEI=B1	20.3	310	370	0.28	98	123	3.5	30/40	50	1	150.0	135.5	0.55
18	57	370	600	LLEC18/20		EEI=B1	24.0	370	420	0.28	116	138	5.0	35/55	90	1	195.0	180.0	1.00
2x18	57	370	600	LLEC36/40	89000530	4.9	40.9	370	505	0.48	198	283	3.5	25/50	90	1	195.0	180.0	1.00
20	57	370	600	LLEC18/20		6.0	25.3	370	420	0.30	122	146	5.0	35/55	90	1	195.0	180.0	1.00
2x20	57	370	600	LLEC36/40	89000530	4.9	43.5	370	505	0.51	210	301	3.5	25/50	90	1	195.0	180.0	1.00
22	62	400	Ø210	LLEC22		6.5	28.5	400	445	0.31	138	161	5.0	35/55	90	1	195.0	180.0	1.00
30	96	365	900	LLEC30	89000519	EEI=B1	35.9	365	445	0.43	174	222	3.5	35/55	90	1	195.0	180.0	1.00
32	81	450	Ø305	LLEC32		7.3	39.3	430	530	0.40	190	246	5.0	40/70	90	1	195.0	180.0	1.00
32	135	265	1,200	LLEC32H*		3.1	33.6	265	440	0.55	162	283	3.0	15/30	90	1	195.0	180.0	1.00
36	103	430	1,200	LLEC36/40	89000530	EEI=B1	42.0	415	635	0.44	203	326	4.0	35/75	90	1	195.0	180.0	1.00
40	103	430	1,200	LLEC36/40	89000530	6.0	45.5	415	635	0.48	220	353	4.0	35/75	90	1	195.0	180.0	1.00
58	110	670	1,500	LLEC58/65	89002475	EEI=B1	66.9	660	1,150	0.44	323	591	7.0	30/70	140	2	225.0	211.5	1.40
65	110	670	1,500	LLEC58/65	89002475	8.9	72.9	660	1,150	0.48	352	644	6.0	30/70	140	2	225.0	211.5	1.40

**Compact lamps**

5	35	180	TC-S	LLEC9		EEI=B1	8.9	180	180	0.21	43	45	3.0	30/35	50	1	150.0	135.5	0.55
2x5	35	180	TC-S	LLEC13		3.4	14.2	175	205	0.35	69	84	2.0	25/40	50	1	150.0	135.5	0.55
7	47	175	TC-S	LLEC9		EEI=B1	10.5	175	180	0.26	51	55	2.0	30/35	50	1	150.0	135.5	0.55
2x7	47	175	TC-S	LLEC13		3.2	17.4	165	205	0.46	84	110	1.5	25/40	50	1	150.0	135.5	0.55
9	60	170	TC-S	LLEC9		EEI=B1	11.9	165	180	0.31	58	66	2.0	30/35	50	1	150.0	135.5	0.55
2x9	60	170	TC-S	LLEC13		3.0	20.8	155	205	0.58	101	140	1.5	25/40	50	1	150.0	135.5	0.55
10	64	190	TC-D	LLEC13		EEI=B1	13.6	185	205	0.32	66	76	2.0	25/40	50	1	150.0	135.5	0.55
10	72	180	TC-DD	LLEC13		EEI=B1	13.9	175	205	0.35	67	83	2.0	25/40	50	1	150.0	135.5	0.55
11	91	155	TC-S	LLEC9		EEI=B1	14.8	155	180	0.42	72	87	1.5	30/35	50	1	150.0	135.5	0.55
13	91	175	TC-D	LLEC13		EEI=B1	16.3	170	205	0.42	79	100	2.0	25/40	50	1	150.0	135.5	0.55
13	91	175	TC-T	LLEC13		EEI=B1	16.3	170	205	0.42	79	100	2.0	25/40	50	1	150.0	135.5	0.55
16	103	195	TC-DD	LLEC16		EEI=B1	19.4	195	205	0.43	94	103	2.0	30/50	50	1	150.0	135.5	0.55
18	100	220	TC-D	LLEC18H		EEI=B1	22.3	220	295	0.44	108	152	3.0	25/55	50	1	150.0	135.5	0.55
18	58	375	TC-F	LLEC18/20		EEI=B1	24.0	370	420	0.28	116	138	5.0	35/55	90	1	195.0	180.0	1.00
18	58	375	TC-L	LLEC18/20		EEI=B1	24.0	370	420	0.28	116	138	5.0	35/55	90	1	195.0	180.0	1.00
18	100	225	TC-T	LLEC18H		EEI=B1	22.3	220	295	0.44	108	152	3.0	25/55	50	1	150.0	135.5	0.55
2x18	58	375	TC-L	LLEC36/40	89000530	4.9	40.9	370	505	0.48	198	283	3.5	25/50	90	1	195.0	180.0	1.00
24	87	345	TC-F	LLEC18/20		EEI=B1	29.4	345	420	0.37	142	181	4.0	35/55	90	1	195.0	180.0	1.00
24	87	345	TC-L	LLEC18/20		EEI=B1	29.4	345	420	0.37	142	181	4.0	35/55	90	1	195.0	180.0	1.00
26	105	325	TC-D	LLEC18/20		EEI=B1	30.6	315	420	0.42	148	207	3.5	35/55	90	1	195.0	180.0	1.00
26	105	325	TC-T	LLEC18/20		EEI=B1	31.1	315	420	0.43	150	210	3.0	35/55	90	1	195.0	180.0	1.00
28	108	320	TC-DD	LLEC18/20		EEI=B1	33.0	315	415	0.46	159	221	3.0	35/55	90	1	195.0	180.0	1.00
36	106	435	TC-F	LLEC36/40	89000530	EEI=B1	42.0	415	635	0.44	203	326	4.0	35/75	90	1	195.0	180.0	1.00
36	106	435	TC-L	LLEC36/40	89000530	EEI=B1	42.0	415	635	0.44	203	326	4.0	35/75	90	1	195.0	180.0	1.00
38	110	430	TC-DD	LLEC36/40	89000530	EEI=B1	44.5	415	635	0.47	215	345	4.0	35/75	90	1	195.0	180.0	1.00

## Notes

Other wattages available on request.

\* Lamps not included in IEC 60081 or IEC 60901.

Refer to Energy Classification System table for ballasts from CELMA and/or MEPS.

**240 V 50 Hz – LLEC low loss ballasts (EEI=B1)**

Lamp				Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current mA@0.9PF	line start current mA@0.9PF	capacitor $\mu F@0.9PF$	normal/abnormal	stack	figure	length mm	mtg centres	weight kg
W	V	mA	mm			W	W	mA	mA	cosφ				Δt	mm	mm	mm		
<b>Linear and circular lamps</b>																			
4	29	170	150	LLEC4/6/8		3.5	8.0	165	170	0.20	37	40	2.0	25/35	50	1	150.0	135.5	0.55
6	42	160	225	LLEC4/6/8		3.3	9.3	155	170	0.25	43	50	2.0	25/35	50	1	150.0	135.5	0.55
2x6	42	160	225	LLEC13		3.2	15.2	160	210	0.40	70	97	1.5	25/40	50	1	150.0	135.5	0.55
8	56	145	300	LLEC4/6/8		3.1	10.2	145	170	0.29	47	58	2.0	25/35	50	1	150.0	135.5	0.55
2x8	56	145	300	LLEC13		2.9	17.1	145	210	0.49	79	120	1.5	25/40	50	1	150.0	135.5	0.55
10	49	230	330	LLEC10*	89000385	5.0	15.0	230	285	0.27	69	90	3.0	30/40	50	1	150.0	135.5	0.55
13	95	165	525	LLEC13		3.3	16.3	165	210	0.41	75	101	2.0	25/40	50	1	150.0	135.5	0.55
15	55	310	450	LLEC15	89000493	EEI=B1	20.5	310	370	0.28	95	119	3.5	30/40	50	1	150.0	135.5	0.55
15	57	300	550	LLEC15 ES8*		5.5	20.5	300	350	0.28	95	116	3.5	30/40	90	1	195.0	180.0	1.00
18	57	370	600	LLEC18/20	89000494	EEI=B1	24.0	370	425	0.27	111	134	5.0	35/55	90	1	195.0	180.0	1.00
2x18	57	370	600	LLEC36/40	89000524	5.0	41.0	370	515	0.46	190	277	3.5	25/50	90	1	195.0	180.0	1.00
2x18	57	370	600	LLEC36/40-20		5.5	41.5	370	515	0.47	192	281	3.5	30/50	90	1	195.0	180.0	1.00
20	57	370	600	LLEC18/20	89000494	6.0	25.3	370	425	0.28	117	141	4.0	35/55	90	1	195.0	180.0	1.00
2x20	57	370	600	LLEC36/40	89000524	5.0	43.6	370	515	0.49	202	295	3.5	25/50	90	1	195.0	180.0	1.00
22	62	400	Ø210	LLEC22		6.5	28.5	400	450	0.30	132	156	5.0	35/55	90	1	195.0	180.0	1.00
23	290	970	LLEC18/20	89000494	4.6	23.9	290	425	0.34	111	170	3.0	35/55	90	1	195.0	180.0	1.00	
30	96	365	900	LLEC30	89000518	EEI=B1	35.9	365	450	0.41	166	215	3.5	35/55	90	1	195.0	180.0	1.00
32	81	450	Ø305	LLEC32		7.5	39.5	430	540	0.38	183	241	5.0	40/70	90	1	195.0	180.0	1.00
32	135	265	1,200	LLEC32H*		3.2	33.7	265	445	0.53	156	275	3.0	15/30	90	1	195.0	180.0	1.00
33	103	380	1,150	LLEC33 ES8*		5.5	38.5	380	520	0.42	178	256	3.5	30/55	90	1	195.0	180.0	1.00
36	103	430	1,200	LLEC36/40	89000524	EEI=B1	42.0	415	645	0.42	194	317	4.0	35/75	90	1	195.0	180.0	1.00
36	103	430	1,200	LLEC36/40-20		EEI=B1	42.6	415	645	0.43	197	322	4.0	40/75	90	1	195.0	180.0	1.00
40	103	430	1,200	LLEC36/40	89000524	6.0	45.5	415	645	0.46	211	344	4.0	35/75	90	1	195.0	180.0	1.00
58	110	670	1,500	LLEC58/65	89002631	EEI=B1	67.0	660	1,170	0.42	310	577	7.0	35/70	140	2	225.0	211.5	1.40
65	110	670	1,500	LLEC58/65	89002631	9.0	73.0	660	1,170	0.46	338	629	6.0	35/70	140	2	225.0	211.5	1.40
<b>Compact lamps</b>																			
5	35	180	TC-S	LLEC9	89000400	EEI=B1	9.0	180	180	0.21	42	44	3.0	30/35	50	1	150.0	135.5	0.55
5	35	180	TC-S	EC 9 B103K	89003614	EEI=B1	10.5	180	190	0.24	49	54	2.0	50/70	27	-	84.5	76.0	0.33
2x5	35	180	TC-S	LLEC13		3.5	14.3	175	210	0.34	66	83	2.0	25/40	50	1	150.0	135.5	0.55
7	47	175	TC-S	LLEC9	89000400	EEI=B1	10.6	175	180	0.25	49	53	2.0	30/35	50	1	150.0	135.5	0.55
7	47	175	TC-S	EC 9 B103K	89003614	EEI=B1	12.1	175	190	0.29	56	64	2.0	50/70	27	-	84.5	76.0	0.33
2x7	47	175	TC-S	LLEC13		3.3	17.5	165	210	0.44	81	108	1.5	25/40	50	1	150.0	135.5	0.55
9	60	170	TC-S	LLEC9	89000400	EEI=B1	12.0	165	180	0.30	56	64	2.0	30/35	50	1	150.0	135.5	0.55
9	60	170	TC-S	EC 9 B103K	89003614	EEI=B1	13.4	165	190	0.34	62	75	2.0	50/70	27	-	84.5	76.0	0.33
2x9	60	170	TC-S	LLEC13		3.1	20.9	155	210	0.56	97	138	1.5	25/40	50	1	150.0	135.5	0.55
10	64	190	TC-D	LLEC13		EEI=B1	13.7	185	210	0.31	63	76	2.0	25/40	50	1	150.0	135.5	0.55
10	72	180	TC-DD	LLEC13		EEI=B1	14.0	175	210	0.33	65	82	2.0	25/40	50	1	150.0	135.5	0.55
11	91	155	TC-S	LLEC9	89000400	EEI=B1	14.9	155	180	0.40	69	84	1.5	30/35	50	1	150.0	135.5	0.55
11	91	155	TC-S	EC 9 B103K	89003614	EEI=B1	16.2	155	190	0.44	75	97	1.5	50/70	27	-	84.5	76.0	0.33
13	91	175	TC-D	LLEC13		EEI=B1	16.4	170	210	0.40	76	98	2.0	25/40	50	1	150.0	135.5	0.55
13	91	175	TC-T	LLEC13		EEI=B1	16.4	170	210	0.40	76	98	2.0	25/40	50	1	150.0	135.5	0.55
16	103	195	TC-DD	LLEC16		EEI=B1	19.5	195	210	0.42	90	102	2.0	30/50	50	1	150.0	135.5	0.55
18	100	220	TC-D	LLEC18H		EEI=B1	22.4	220	300	0.42	104	148	2.0	30/55	50	1	150.0	135.5	0.55
18	58	375	TC-F	LLEC18/20	89000494	EEI=B1	24.0	370	425	0.27	111	134	5.0	35/55	90	1	195.0	180.0	1.00
18	58	375	TC-L	LLEC18/20	89000494	EEI=B1	24.0	370	425	0.27	111	134	5.0	35/55	90	1	195.0	180.0	1.00
18	100	225	TC-T	LLEC18H		EEI=B1	22.4	220	300	0.42	104	148	2.0	30/55	50	1	150.0	135.5	0.55
2x18	58	375	TC-L	LLEC36/40	89000524	5.0	41.0	370	515	0.46	190	277	3.5	25/50	90	1	195.0	180.0	1.00
2x18	58	375	TC-L	LLEC36/40-20		5.5	41.5	370	515	0.47	192	281	3.5	30/50	90	1	195.0	180.0	1.00
24	87	345	TC-F	LLEC18/20	89000494	EEI=B1	29.4	345	425	0.35	136	176	3.5	35/55	90	1	195.0	180.0	1.00
24	87	345	TC-L	LLEC18/20	89000494	EEI=B1	29.4	345	425	0.35	136	176	3.5	35/55	90	1	195.0	180.0	1.00
26	105	325	TC-D	LLEC18/20	89000494	EEI=B1	30.6	315	425	0.40	142	201	3.0	35/55	90	1	195.0	180.0	1.00
26	105	325	TC-T	LLEC18/20	89000494	EEI=B1	31.1	315	425	0.41	144	204	3.0	35/55	90	1	195.0	180.0	1.00
28	108	320	TC-DD	LLEC18/20	89000494	EEI=B1	33.0	315	420	0.44	153	214	3.0	35/55	90	1	195.0	180.0	1.00
36	106	435	TC-F	LLEC36/40	89000524	EEI=B1	42.0	415	645	0.42	194	317	4.0	35/75	90	1	195.0	180.0	1.00
36	106	435	TC-F	LLEC36/40-20		EEI=B1	42.6	415	645	0.43	197	322	4.0	40/75	90	1	195.0	180.0	1.00
36	106	435	TC-L	LLEC36/40	89000524	EEI=B1	42.0	415	645	0.42	194	317	4.0	35/75	90	1	195.0	180.0	1.00
36	106	435	TC-L	LLEC36/40-20		EEI=B1	42.6	415	645	0.43	197	322	4.0	40/75	90	1	195.0	180.0	1.00
38	110	430	TC-DD	LLEC36/40	89000524	EEI=B1	44.5	415	645	0.45	206	336	4.0	35/75	90	1	195.0	180.0	1.00

**250 V 50 Hz – LLEC low loss ballasts (EEI=B1)**

Lamp				Ballast		Electrical							Thermal	Physical					
wattage	voltage	current	length	type	article number	loss hot W	input power W	lamp current mA	lamp start current mA	circuit P F cosφ	line current mA@0.9PF	line start current mA@0.9PF	capacitor μF@0.9PF	normal/ abnormal Δt	stack mm	figure mm	length mm	mtg centres mm	weight kg
W	V	mA	mm																

**Linear and circular lamps**

4	29	170	150	LLEC4/6/8		3.6	8.1	165	175	0.20	36	40	2.0	25/35	50	1	150.0	135.5	0.55
6	42	160	225	LLEC4/6/8		3.4	9.4	155	175	0.24	42	49	2.0	25/35	50	1	150.0	135.5	0.55
2x6	42	160	225	LLEC13		3.3	15.3	160	215	0.38	68	96	1.5	25/40	50	1	150.0	135.5	0.55
8	56	145	300	LLEC4/6/8		3.2	10.3	145	175	0.28	46	58	1.5	25/35	50	1	150.0	135.5	0.55
2x8	56	145	300	LLEC13		3.0	17.2	145	215	0.47	76	119	1.5	25/40	50	1	150.0	135.5	0.55
10	49	230	330	LLEC10*		5.0	15.0	230	290	0.26	67	88	3.0	30/40	50	1	150.0	135.5	0.55
13	95	165	525	LLEC13		3.4	16.4	165	215	0.40	73	100	1.5	25/40	50	1	150.0	135.5	0.55
15	55	310	450	LLEC15		EEI=B1	20.7	310	380	0.27	92	118	3.5	30/40	50	1	150.0	135.5	0.55
18	57	370	600	LLEC18/20		EEI=B1	24.5	370	435	0.26	109	134	4.0	40/60	90	1	195.0	180.0	1.00
2x18	57	370	600	LLEC36/40	89000529	5.1	41.1	370	520	0.44	183	270	3.5	30/55	90	1	195.0	180.0	1.00
20	57	370	600	LLEC18/20		6.5	25.8	370	435	0.28	115	142	4.0	40/60	90	1	195.0	180.0	1.00
2x20	57	370	600	LLEC36/40	89000529	5.1	43.7	370	520	0.47	194	287	3.5	30/55	90	1	195.0	180.0	1.00
22	62	400	Ø210	LLEC22		6.8	28.8	400	455	0.29	128	153	5.0	40/60	90	1	195.0	180.0	1.00
30	96	365	900	LLEC30		EEI=B1	36.2	365	455	0.40	161	211	3.5	40/60	90	1	195.0	180.0	1.00
32	81	450	Ø305	LLEC32		7.8	39.8	430	545	0.37	177	235	5.0	45/75	90	1	195.0	180.0	1.00
32	135	265	1,200	LLEC32H*		3.3	33.8	265	450	0.51	150	268	3.0	15/30	90	1	195.0	180.0	1.00
36	103	430	1,200	LLEC36/40	89000529	EEI=B1	42.5	415	655	0.41	189	313	4.0	40/80	90	1	195.0	180.0	1.00
40	103	430	1,200	LLEC36/40	89000529	6.5	46.0	415	655	0.44	204	339	4.0	40/80	90	1	195.0	180.0	1.00
58	110	670	1,500	LLEC58/65		EEI=B1	67.4	660	1,180	0.41	300	562	6.0	40/75	140	2	225.0	211.5	1.40
65	110	670	1,500	LLEC58/65		9.4	73.4	660	1,180	0.44	326	612	6.0	40/75	140	2	225.0	211.5	1.40

**Compact lamps**

5	35	180	TC-S	LLEC9		EEI=B1	9.1	180	185	0.20	40	44	2.0	30/35	50	1	150.0	135.5	0.55
2x5	35	180	TC-S	LLEC13		3.6	14.4	175	215	0.33	64	83	2.0	25/40	50	1	150.0	135.5	0.55
7	47	175	TC-S	LLEC9		EEI=B1	10.7	175	185	0.24	48	53	2.0	30/35	50	1	150.0	135.5	0.55
2x7	47	175	TC-S	LLEC13		3.4	17.6	165	215	0.43	78	107	1.5	25/40	50	1	150.0	135.5	0.55
9	60	170	TC-S	LLEC9		EEI=B1	12.1	165	185	0.29	54	63	2.0	30/35	50	1	150.0	135.5	0.55
2x9	60	170	TC-S	LLEC13		3.2	21.0	155	215	0.54	93	136	1.5	25/40	50	1	150.0	135.5	0.55
10	64	190	TC-D	LLEC13		EEI=B1	13.8	185	215	0.30	61	75	2.0	25/40	50	1	150.0	135.5	0.55
10	72	180	TC-DD	LLEC13		EEI=B1	14.1	175	215	0.32	63	81	2.0	25/40	50	1	150.0	135.5	0.55
11	91	155	TC-S	LLEC9		EEI=B1	15.0	155	185	0.39	67	83	1.5	30/35	50	1	150.0	135.5	0.55
13	91	175	TC-D	LLEC13		EEI=B1	16.5	170	215	0.39	73	97	2.0	25/40	50	1	150.0	135.5	0.55
13	91	175	TC-T	LLEC13		EEI=B1	16.5	170	215	0.39	73	97	2.0	25/40	50	1	150.0	135.5	0.55
16	103	195	TC-DD	LLEC16		EEI=B1	19.6	195	215	0.40	87	101	2.0	30/50	50	1	150.0	135.5	0.55
18	100	220	TC-D	LLEC18H		EEI=B1	22.5	220	305	0.41	100	146	2.0	30/55	50	1	150.0	135.5	0.55
18	58	375	TC-F	LLEC18/20		EEI=B1	24.5	370	435	0.26	109	134	4.0	40/60	90	1	195.0	180.0	1.00
18	58	375	TC-L	LLEC18/20		EEI=B1	24.5	370	435	0.26	109	134	4.0	40/60	90	1	195.0	180.0	1.00
18	100	225	TC-T	LLEC18H		EEI=B1	22.5	220	305	0.41	100	146	2.0	30/55	50	1	150.0	135.5	0.55
2x18	58	375	TC-L	LLEC36/40	89000529	5.1	41.1	370	520	0.44	183	270	3.5	30/55	90	1	195.0	180.0	1.00
24	87	345	TC-F	LLEC18/20		EEI=B1	29.8	345	435	0.35	132	175	3.5	40/60	90	1	195.0	180.0	1.00
24	87	345	TC-L	LLEC18/20		EEI=B1	29.8	345	435	0.35	132	175	3.5	40/60	90	1	195.0	180.0	1.00
26	105	325	TC-D	LLEC18/20		EEI=B1	31.0	315	435	0.39	138	200	3.0	40/60	90	1	195.0	180.0	1.00
26	105	325	TC-T	LLEC18/20		EEI=B1	31.5	315	435	0.40	140	203	3.0	40/60	90	1	195.0	180.0	1.00
28	108	320	TC-DD	LLEC18/20		EEI=B1	33.4	315	425	0.42	148	210	3.0	40/60	90	1	195.0	180.0	1.00
36	106	435	TC-F	LLEC36/40	89000529	EEI=B1	42.5	415	655	0.41	189	313	4.0	40/80	90	1	195.0	180.0	1.00
36	106	435	TC-L	LLEC36/40	89000529	EEI=B1	42.5	415	655	0.41	189	313	4.0	40/80	90	1	195.0	180.0	1.00
38	110	430	TC-DD	LLEC36/40	89000529	EEI=B1	45.0	415	655	0.43	200	331	4.0	40/80	90	1	195.0	180.0	1.00

## Notes


Other wattages available on request.

\* Lamps not included in IEC 60081 or IEC 60901.

Refer to Energy Classification System table for ballasts from CELMA and/or MEPS.

**B2 energy control ballasts**

figure 1

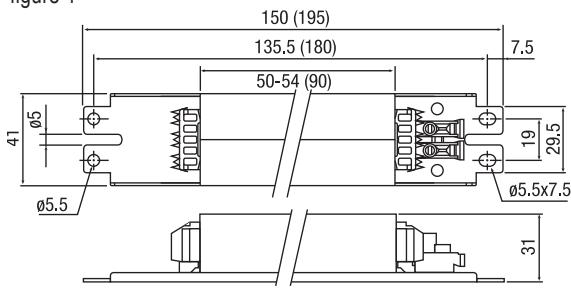

50, 54 and (90 mm) stack


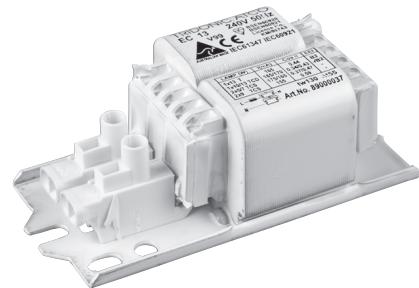


figure 2



27 mm stack

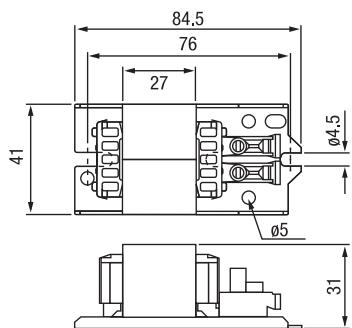

- ballasts to EEI = B2 energy classification under MEPS and CELMA
- low power consumption
- slim cross-section and compact
- low loss core laminations
- low magnetic stray field
- long service life
- vacuum impregnation
- non-audible noise level
- nomex class "H" gap for fixed calibration
- resistant to moisture and corrosion
- 10 A push-in terminals (screw terminals on request)
- maximum winding temperature tw 130 °C Low temperature rise

**100 % final testing**

- continuity
- winding short circuit
- core to coil high voltage test
- operating values

**220 V 50 Hz – EC low loss ballasts (EEI=B2)**

Lamp				Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current	line start current	capacitor	normal/ abnormal	stack	figure	length	mtg centres	weight
W	V	mA	mm			W	W	mA	mA	cosφ	mA@0.9PF	mA@0.9PF	μF@0.9PF	Δt	mm	mm	mm	mm	kg

**Linear and circular lamps**

2x6	42	160	225	EC13	89000039	4.2	16.2	160	200	0.46	82	107	1.5	55/100	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13	89000039	3.8	18.0	145	200	0.56	91	132	1.5	55/100	27	2	84.5	76.0	0.33
13	95	165	525	EC13	89000039	EEI=B2	17.3	165	200	0.48	87	111	1.5	55/100	27	2	84.5	76.0	0.33
18	57	370	600	EC18/20	89003428	EEI=B2	25.9	370	435	0.32	131	161	5.0	55/85	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40		6.5	42.5	370	560	0.52	215	341	3.5	45/130	54	1	150.0	135.5	0.60
20	57	370	600	EC18/20	89003428	7.9	27.2	370	435	0.33	137	170	5.0	55/85	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40		6.5	45.1	370	560	0.55	228	362	3.0	45/130	54	1	150.0	135.5	0.60
36	103	430	1200	EC36/40		EEI=B2	43.8	415	635	0.48	221	355	4.0	50/150	54	1	150.0	135.5	0.60
40	103	430	1200	EC36/40		7.8	47.3	415	635	0.52	239	384	4.0	50/150	54	1	150.0	135.5	0.60

**Compact lamps**

5	35	180	TC-S	EC9	89000131	5.7	11.1	180	190	0.28	56	62	3.0	55/75	27	2	84.5	76.0	0.33
2x5	35	180	TC-S	EC13	89000039	4.6	15.4	175	200	0.40	78	93	2.0	55/100	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9	89000131	EEI=B2	12.6	175	190	0.33	64	73	2.0	55/75	27	2	84.5	76.0	0.33
2x7	47	175	TC-S	EC13	89000039	4.3	18.5	165	200	0.51	93	119	1.5	55/100	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9	89000131	EEI=B2	13.9	165	190	0.38	70	85	2.0	55/75	27	2	84.5	76.0	0.33
2x9	60	170	TC-S	EC13	89000039	4	21.8	155	200	0.64	110	149	1.5	55/100	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13	89000039	4.8	14.8	185	200	0.36	75	85	2.0	55/100	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13	89000039	4.6	15.1	175	200	0.39	76	91	2.0	55/100	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9	89000131	EEI=B2	16.7	155	190	0.49	84	108	1.5	55/75	27	2	84.5	76.0	0.33
13	91	175	TC-D	EC13	89000039	EEI=B2	17.4	170	200	0.47	88	109	2.0	55/100	27	2	84.5	76.0	0.33
13	91	175	TC-T	EC13	89000039	EEI=B2	17.4	170	200	0.47	88	109	2.0	55/100	27	2	84.5	76.0	0.33
16	103	195	TC-DD	EC16		EEI=B2	21.4	195	250	0.50	108	145	2.0	60/115	27	2	84.5	76.0	0.33
18	100	220	TC-D	EC18H	89000096	EEI=B2	23.8	220	315	0.49	120	181	2.0	50/120	27	2	84.5	76.0	0.33
18	58	375	TC-F	EC18/20	89003428	EEI=B2	25.9	370	435	0.32	131	161	5.0	55/85	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20	89003428	EEI=B2	25.9	370	435	0.32	131	161	5.0	55/85	50	1	150.0	135.5	0.55
18	100	225	TC-T	EC18H	89000096	EEI=B2	23.8	220	315	0.49	120	181	2.0	50/120	27	2	84.5	76.0	0.33
2x18	58	375	TC-L	EC36/40		6.5	42.5	370	560	0.52	215	341	3.5	45/130	54	1	150.0	135.5	0.60
21	101	270	TC-DD	EC21		EEI=B2	26.6	270	350	0.45	134	183	3.0	40/80	50	1	150.0	135.5	0.55
24	87	345	TC-F	EC18/20	89003428	EEI=B2	31.1	345	435	0.41	157	208	4.0	55/85	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20	89003428	EEI=B2	31.1	345	435	0.41	157	208	4.0	55/85	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20	89003428	EEI=B2	32.1	315	435	0.46	162	235	3.0	55/85	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20	89003428	EEI=B2	32.6	315	435	0.47	164	238	3.0	55/85	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20	89003428	EEI=B2	34.5	315	410	0.50	174	238	3.0	55/85	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40		EEI=B2	43.8	415	635	0.48	221	355	4.0	50/150	54	1	150.0	135.5	0.60
36	106	435	TC-L	EC36/40		EEI=B2	43.8	415	635	0.48	221	355	4.0	50/150	54	1	150.0	135.5	0.60
38	110	430	TC-DD	EC36/40		EEI=B2	46.3	415	635	0.51	234	376	4.0	50/150	54	1	150.0	135.5	0.60

**Notes**

Other wattages available on request.

Refer to Energy Classification System table for ballasts from CELMA and/or MEPS.

Some ballast and lamp combination may not operate within the EEI=B2 rating.

**230 V 50 Hz – EC low loss ballasts (EEI=B2)**

Lamp				Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current	line start current	capacitor	normal/abnormal	stack	figure	length	mtg centres	weight
W	V	mA	mm			W	W	mA	mA	cosφ	mA@0.9PF	mA@0.9PF	μF@0.9PF	Δt	mm		mm	mm	kg

**Linear and circular lamps**

4	29	170	150	EC4/6/8		5.5	10.0	165	170	0.26	48	52	2.0	60/95	27	2	84.5	76.0	0.33
6	42	160	225	EC4/6/8		EEI=B2	11.2	155	170	0.31	54	62	2.0	60/95	27	2	84.5	76.0	0.33
2x6	42	160	225	EC13	89000041	3.9	15.9	155	210	0.45	77	109	1.5	55/105	27	2	84.5	76.0	0.33
8	56	145	300	EC4/6/8		EEI=B2	11.9	145	170	0.36	58	71	1.5	60/95	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13	89000041	3.5	17.7	140	210	0.55	86	135	1.5	55/105	27	2	84.5	76.0	0.33
13	95	165	525	EC13	89000041	EEI=B2	17.0	160	210	0.46	82	113	1.5	55/105	27	2	84.5	76.0	0.33
15	55	310	450	EC15		EEI=B2	23.2	310	360	0.33	112	137	3.5	50/80	50	1	150.0	135.5	0.55
18	57	370	600	EC18/20	89003333	EEI=B2	26.4	370	430	0.31	128	156	5.0	55/85	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40	89002851	6.5	42.5	370	560	0.50	205	326	3.5	50/130	54	1	150.0	135.5	0.60
20	57	370	600	EC18/20	89003333	8.4	27.7	370	430	0.33	134	163	4.0	55/8	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40	89002851	6.5	45.1	370	560	0.53	218	346	3.0	50/130	54	1	150.0	135.5	0.60
22	62	400	Ø210	EC22		EEI=B2	31.5	400	480	0.34	152	192	5.0	50/95	50	1	150.0	135.5	0.55
30	96	365	900	EC30	89003480	EEI=B2	39.0	360	480	0.47	188	264	3.5	50/95	50	1	150.0	135.5	0.55
32	81	450	Ø305	EC32		EEI=B2	41.5	430	520	0.42	200	255	5.0	55/125	50	1	150.0	135.5	0.55
36	103	430	1200	EC36/40	89002851	EEI=B2	44.3	415	630	0.46	214	341	4.0	50/150	54	1	150.0	135.5	0.60
40	103	430	1200	EC36/40	89002851	8.3	47.8	415	630	0.50	231	368	4.0	50/150	54	1	150.0	135.5	0.60
58	110	670	1500	EC58/65	89003334	EEI=B2	68.4	660	960	0.45	330	505	7.0	45/130	90	1	195.0	180.0	1.00
65	110	670	1500	EC58/65	89003334	10.4	74.4	660	960	0.49	359	549	6.0	45/130	90	1	195.0	180.0	1.00

**Compact lamps**

5	35	180	TC-S	EC9	89000133	5.1	10.5	175	190	0.26	51	58	2.0	55/75	27	2	84.5	76.0	0.33
2x5	35	180	TC-S	EC13	89000041	4.4	15.2	175	210	0.38	73	92	2.0	55/105	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9	89000133	EEI=B2	12.1	170	190	0.31	58	69	2.0	55/75	27	2	84.5	76.0	0.33
2x7	47	175	TC-S	EC13	89000041	4.1	18.3	165	210	0.48	89	118	1.5	55/105	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9	89000133	EEI=B2	13.6	165	190	0.36	65	79	2.0	55/75	27	2	84.5	76.0	0.33
2x9	60	170	TC-S	EC13	89000041	3.9	21.7	155	210	0.61	105	149	1.5	55/105	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13	89000041	4.6	14.6	185	210	0.34	71	84	2.0	55/105	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13	89000041	4.4	14.9	175	210	0.37	72	91	2.0	55/105	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9	89000133	EEI=B2	16.2	150	190	0.47	78	104	1.5	55/75	27	2	84.5	76.0	0.33
13	91	175	TC-D	EC13	89000041	EEI=B2	17.3	170	210	0.44	83	108	2.0	55/105	27	2	84.5	76.0	0.33
13	91	175	TC-T	EC13	89000041	EEI=B2	17.3	170	210	0.44	83	108	2.0	55/105	27	2	84.5	76.0	0.33
16	103	195	TC-DD	EC16		EEI=B2	21.5	195	250	0.48	104	140	2.0	60/115	27	2	84.5	76.0	0.33
18	100	220	TC-D	EC18H	89000100	EEI=B2	24.2	220	300	0.48	117	167	2.0	55/120	27	2	84.5	76.0	0.33
18	58	375	TC-F	EC18/20	89003333	EEI=B2	26.4	370	430	0.31	128	156	5.0	55/85	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20	89003333	EEI=B2	26.4	370	430	0.31	128	156	5.0	55/85	50	1	150.0	135.5	0.55
18	100	225	TC-T	EC18H	89000100	EEI=B2	24.2	220	300	0.48	117	167	2.0	55/120	27	2	84.5	76.0	0.33
2x18	58	375	TC-L	EC36/40	89002851	6.5	42.5	370	560	0.50	205	326	3.5	50/130	54	1	150.0	135.5	0.60
21	101	270	TC-DD	EC21		EEI=B2	26.8	270	340	0.43	129	171	3.0	40/80	50	1	150.0	135.5	0.60
24	87	345	TC-F	EC18/20	89003333	EEI=B2	31.5	345	430	0.40	152	199	3.5	55/85	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20	89003333	EEI=B2	31.5	345	430	0.40	152	199	3.5	55/85	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20	89003333	EEI=B2	32.4	315	430	0.45	157	225	3.0	55/85	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20	89003333	EEI=B2	32.9	315	430	0.45	158	228	3.0	55/85	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20	89003333	EEI=B2	34.8	315	410	0.48	168	230	3.0	55/85	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40	89002851	EEI=B2	44.3	415	630	0.46	214	341	4.0	50/150	54	1	150.0	135.5	0.60
36	106	435	TC-L	EC36/40	89002851	EEI=B2	44.3	415	630	0.46	214	341	4.0	50/150	54	1	150.0	135.5	0.60
38	110	430	TC-DD	EC36/40	89002851	EEI=B2	46.8	415	630	0.49	226	360	4.0	50/150	54	1	150.0	135.5	0.60

## Notes

Other wattages available on request.

Refer to Energy Classification System table for ballasts from CELMA and/or MEPS.

Some ballast and lamp combination may not operate within the EEI=B2 rating.

**240 V 50 Hz – EC low loss ballasts (EEI=B2)**

Lamp				Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot W	input power W	lamp current mA	lamp start current mA	circuit PF cosφ	line current mA@0.9PF	line start current mA@0.9PF	capacitor μF@0.9PF	normal/ abnormal Δt	stack mm	figure	length mm	mtg centres mm	weight kg

**Linear and circular lamps**

4	29	170	150	EC4/6/8	89000114	5.5	10.0	165	170	0.25	46	50	2.0	60/95	27	2	84.5	76.0	0.33
6	42	160	225	EC4/6/8	89000114	EEI=B2	11.2	155	170	0.30	52	60	2.0	60/95	27	2	84.5	76.0	0.33
2x6	42	160	225	EC13	89000037	4.4	16.4	160	215	0.43	76	107	1.5	55/105	27	2	84.5	76.0	0.33
8	56	145	300	EC4/6/8	89000114	EEI=B2	11.9	145	170	0.34	55	68	1.5	60/95	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13	89000037	4.0	18.2	145	215	0.52	84	131	1.5	55/105	27	2	84.5	76.0	0.33
13	95	165	525	EC13	89000037	EEI=B2	17.5	165	215	0.44	81	111	1.5	55/105	27	2	84.5	76.0	0.33
15	55	310	450	EC15	89002928	EEI=B2	23.7	310	360	0.32	110	134	3.5	55/80	50	1	150.0	135.5	0.55
18	57	370	600	EC18/20	89002929	EEI=B2	26.9	370	425	0.30	125	150	4.0	55/85	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40	89002931	6.5	42.5	370	560	0.48	197	313	3.5	45/130	54	1	150.0	135.5	0.60
20	57	370	600	EC18/20	89002929	8.9	28.2	370	425	0.32	131	157	4.0	55/85	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40	89002931	6.5	45.1	370	560	0.51	209	332	3.0	45/130	54	1	150.0	135.5	0.60
22	62	400	Ø210	EC22		EEI=B2	31.5	400	475	0.33	146	182	5.0	55/100	50	1	150.0	135.5	0.55
30	96	365	900	EC30	89002930	EEI=B2	39.5	360	475	0.46	183	253	3.5	55/100	50	1	150.0	135.5	0.55
32	81	450	Ø305	EC32		EEI=B2	41.5	430	520	0.40	192	244	5.0	55/125	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40	89002931	EEI=B2	44.8	415	625	0.45	207	328	4.0	55/150	54	1	150.0	135.5	0.60
40	103	430	1,200	EC36/40	89002931	8.8	48.3	415	625	0.48	224	354	3.5	55/150	54	1	150.0	135.5	0.60
58	110	670	1,500	EC58/65	89002932	EEI=B2	68.4	660	940	0.43	317	474	7.0	50/135	90	1	195.0	180.0	1.00
65	110	670	1,500	EC58/65	89002932	10.4	74.4	660	940	0.47	344	515	6.0	50/135	90	1	195.0	180.0	1.00

**Compact lamps**


5	35	180	TC-S	EC9	89000128	5.7	11.1	180	187	0.26	51	56	2.0	60/75	27	2	84.5	76.0	0.33
2x5	35	180	TC-S	EC13	89000037	4.8	15.6	175	215	0.37	72	93	2.0	55/105	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9	89000128	EEI=B2	12.6	175	187	0.30	58	65	2.0	60/75	27	2	84.5	76.0	0.33
2x7	47	175	TC-S	EC13	89000037	4.5	18.7	165	215	0.47	87	118	1.5	55/105	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9	89000128	EEI=B2	13.9	165	187	0.35	64	77	2.0	60/75	27	2	84.5	76.0	0.33
2x9	60	170	TC-S	EC13	89000037	4.2	22.0	155	215	0.59	102	149	1.5	55/105	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13	89000037	5.0	15.0	185	215	0.34	70	85	2.0	55/105	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13	89000037	4.8	15.3	175	215	0.36	71	91	2.0	55/105	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9	89000128	EEI=B2	16.7	155	187	0.45	77	98	1.5	60/75	27	2	84.5	76.0	0.33
13	91	175	TC-D	EC13	89000037	EEI=B2	17.6	170	215	0.43	82	108	2.0	55/105	27	2	84.5	76.0	0.33
13	91	175	TC-T	EC13	89000037	EEI=B2	17.6	170	215	0.43	82	108	2.0	55/105	27	2	84.5	76.0	0.33
16	103	195	TC-DD	EC16	89000076	EEI=B2	21.5	195	250	0.46	100	134	2.0	60/115	27	2	84.5	76.0	0.33
18	100	220	TC-D	EC18H	89000095	EEI=B2	24.5	220	280	0.46	113	152	2.0	65/120	27	2	84.5	76.0	0.33
18	58	375	TC-F	EC18/20	89002929	EEI=B2	26.9	370	425	0.30	125	150	4.0	55/85	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20	89002929	EEI=B2	26.9	370	425	0.30	125	150	4.0	55/85	50	1	150.0	135.5	0.55
18	100	225	TC-T	EC18H	89000095	EEI=B2	24.5	220	280	0.46	113	152	2.0	65/120	27	2	84.5	76.0	0.33
2x18	58	375	TC-L	EC36/40	89002931	6.5	42.5	370	560	0.48	197	313	3.5	45/130	54	1	150.0	135.5	0.60
21	101	270	TC-DD	EC21	89000259	EEI=B2	26.8	270	340	0.41	124	164	3.0	40/80	50	1	150.0	135.5	0.60
24	87	345	TC-F	EC18/20	89002929	EEI=B2	32.0	345	425	0.39	148	191	3.5	55/85	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20	89002929	EEI=B2	32.0	345	425	0.39	148	191	3.5	55/85	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20	89002929	EEI=B2	32.8	315	425	0.43	152	215	3.0	55/85	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20	89002929	EEI=B2	33.3	315	425	0.44	154	219	3.0	55/85	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20	89002929	EEI=B2	35.2	315	410	0.47	163	223	3.0	55/85	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40	89002931	EEI=B2	44.8	415	625	0.45	207	328	4.0	55/150	54	1	150.0	135.5	0.60
36	106	435	TC-L	EC36/40	89002931	EEI=B2	44.8	415	625	0.45	207	328	4.0	55/150	54	1	150.0	135.5	0.60
38	110	430	TC-DD	EC36/40	89002931	EEI=B2	47.3	415	625	0.47	219	346	4.0	55/150	54	1	150.0	135.5	0.60

## Notes



Other wattages available on request.

Refer to Energy Classification System table for ballasts from CELMA and/or MEPS.

Some ballast and lamp combination may not operate within the EEI=B2 rating.

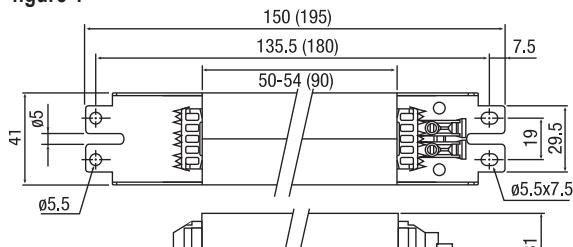**EC energy control ballasts****figure 1**

50, 54 and (90 mm) stack

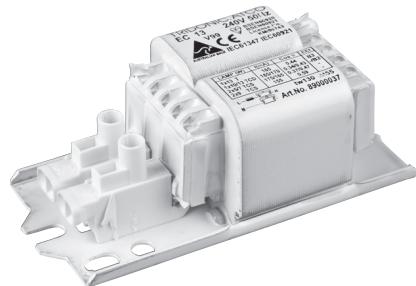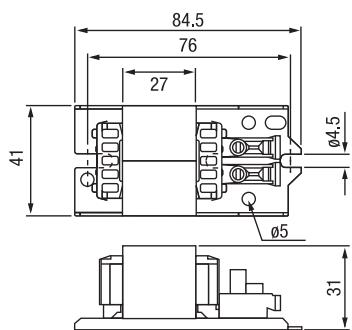**figure 2**

27 mm stack



- slim cross-section and compact
- low magnetic stray field
- vacuum impregnation
- long service life
- non-audible noise level
- nomex class "H" gap for fixed calibration
- resistant to moisture and condensation
- 10 A push-in terminals (Screw terminals on request)
- low power consumption
- maximum winding temperature tw 130 °C
- other supply voltages than listed are available i.e. 120 V, 277 V etc.

**100 % final testing**

- continuity
- winding short circuit
- core to coil high voltage test
- operating values

## 220 V 50 Hz – EC energy control ballasts

Lamp				Ballast		Electrical							Thermal	Physical					
wattage	voltage	current	length	type	article number	loss hot	input power	lamp current	lamp start current	circuit P F	line current	line start current	capacitor	normal/ abnormal	stack	figure	length	mtg centres	weight
W	V	mA	mm			W	W	mA	mA	cosφ	mA@0.9PF	mA@0.9PF	μF 0.9PF	Δt	mm		mm	mm	kg
<b>Linear and circular lamps</b>																			
4	29	170	150	EC4/6/8		5.5	10.0	165	170	0.28	51	55	2.0	60/95	27	2	84.5	76.0	0.33
6	42	160	225	EC4/6/8		5.2	11.2	155	170	0.33	56	65	2.0	60/95	27	2	84.5	76.0	0.33
2x6	42	160	225	EC13	89000039	4.2	16.2	160	200	0.46	82	107	1.5	55/100	27	2	84.5	76.0	0.33
8	56	145	300	EC4/6/8		4.8	11.9	145	170	0.37	60	74	2.0	60/95	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13	89000039	3.8	18.0	145	200	0.56	91	132	1.5	55/100	27	2	84.5	76.0	0.33
10	49	230	330	EC10*	89000185	6.2	16.2	225	240	0.33	82	92	3.0	40/105	50	1	150.0	135.5	0.55
13	95	165	525	EC13	89000039	4.3	17.3	165	200	0.48	87	111	1.5	55/100	27	2	84.5	76.0	0.33
15	55	310	450	EC15		8.5	23.5	310	360	0.34	119	145	3.5	50/85	50	1	150.0	135.5	0.55
18	57	370	600	EC18/20	89000208	9.0	27.0	370	440	0.33	136	170	5.0	50/90	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40	89000325	6.7	42.7	370	620	0.52	216	379	3.5	50/130	50	1	150.0	135.5	0.55
20	57	370	600	EC18/20	89000208	9.0	28.3	370	440	0.35	143	178	5.0	50/90	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40	89000325	6.7	45.3	370	620	0.56	229	403	3.0	50/130	50	1	150.0	135.5	0.55
22	62	400	Ø210	EC22		10.5	32.5	400	450	0.37	164	194	5.0	65/115	50	1	150.0	135.5	0.55
30	96	365	900	EC30		9.5	39.5	360	450	0.50	199	262	3.5	55/115	50	1	150.0	135.5	0.55
30	55	610	Ø224	EC30L		12.0	42.0	600	670	0.32	212	249	7.0	50/100	90	1	195.0	180.0	1.00
32	81	450	Ø305	EC32		10.5	42.5	440	580	0.44	215	297	5.0	55/130	50	1	150.0	135.5	0.55
32	135	265	1,200	EC32H*		4.5	35.0	265	475	0.60	177	333	2.0	35/55	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40	89000325	8.5	44.5	415	636	0.49	225	362	4.0	55/140	50	1	150.0	135.5	0.55
40	103	430	1,200	EC36/40	89000325	8.5	48.0	415	636	0.53	242	390	4.0	55/140	50	1	150.0	135.5	0.55
58	110	670	1,500	EC58/65	89000454	12.0	70.0	660	980	0.48	354	551	7.0	45/135	90	1	195.0	180.0	1.00
65	110	670	1,500	EC58/65	89000454	12.0	76.0	660	980	0.52	384	598	6.0	45/135	90	1	195.0	180.0	1.00
<b>Compact lamps</b>																			
5	35	180	TC-S	EC9	89000131	5.7	11.1	180	190	0.28	56	62	3.0	55/75	27	2	84.5	76.0	0.33
2x5	35	180	TC-S	EC13	89000039	4.6	15.4	175	200	0.40	78	93	2.0	55/100	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9	89000131	5.5	12.6	175	190	0.33	64	73	2.0	55/75	27	2	84.5	76.0	0.33
2x7	47	175	TC-S	EC13	89000039	4.3	18.5	165	200	0.51	93	119	1.5	55/100	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9	89000131	5.2	13.9	165	190	0.38	70	85	2.0	55/75	27	2	84.5	76.0	0.33
2x9	60	170	TC-S	EC13	89000039	4.0	21.8	155	200	0.64	110	149	1.5	55/100	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13	89000039	4.8	14.8	185	200	0.36	75	85	2.0	55/100	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13	89000039	4.6	15.1	175	200	0.39	76	91	2.0	55/100	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9	89000131	4.9	16.7	155	190	0.49	84	108	1.5	55/75	27	2	84.5	76.0	0.33
13	91	175	TC-D	EC13	89000039	4.4	17.4	170	200	0.47	88	109	2.0	55/100	27	2	84.5	76.0	0.33
13	59	285	TC-S	EC13L		7.6	20.6	285	320	0.33	104	123	3.5	40/85	50	1	150.0	135.5	0.55
13	91	175	TC-T	EC13	89000039	4.4	17.4	170	200	0.47	88	109	2.0	55/100	27	2	84.5	76.0	0.33
18	58	375	TC-F	EC18/20	89000208	9.0	27.0	370	440	0.33	136	170	5.0	50/90	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20	89000208	9.0	27.0	370	440	0.33	136	170	5.0	50/90	50	1	150.0	135.5	0.55
2x18	58	375	TC-L	EC36/40	89000325	6.7	42.7	370	620	0.52	216	379	3.5	50/130	50	1	150.0	135.5	0.55
24	87	345	TC-F	EC18/20	89000208	8.0	32.0	345	440	0.42	162	217	3.5	50/90	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20	89000208	8.0	32.0	345	440	0.42	162	217	3.5	50/90	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20	89000208	6.9	32.9	315	440	0.47	166	244	3.0	50/90	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20	89000208	6.9	33.4	315	440	0.48	169	247	3.0	50/90	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20	89000208	6.9	35.3	315	410	0.51	178	244	3.0	50/90	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40	89000325	8.5	44.5	415	636	0.49	225	362	4.0	55/140	50	1	150.0	135.5	0.55
36	106	435	TC-L	EC36/40	89000325	8.5	44.5	415	636	0.49	225	362	4.0	55/140	50	1	150.0	135.5	0.55
38	110	430	TC-DD	EC36/40	89000325	8.5	47.0	415	636	0.51	237	382	4.0	55/140	50	1	150.0	135.5	0.55

## Notes

Other wattages available on request.

\* Lamps not included in IEC 60081 or IEC 60901.

**220 V 60 Hz – EC energy control ballasts**

Lamp				Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot W	input power W	lamp current mA	lamp start current mA	circuit PF cosφ	line current mA@0.9PF	line start current mA@0.9PF	capacitor μF@0.9PF	normal/ abnormal Δt	stack mm	figure mm	length mm	mtg centres mm	weight kg
<b>Linear and circular lamps</b>																			
4	29	170	150	EC4/6/8	89000120	5.0	9.5	165	170	0.26	48	52	2.0	45/90	27	2	84.5	76.0	0.33
6	42	160	225	EC4/6/8	89000120	4.7	10.7	155	170	0.31	54	62	1.5	45/90	27	2	84.5	76.0	0.33
2x6	42	160	225	EC13	89000040	4.2	16.2	160	206	0.46	82	110	1.5	50/100	27	2	84.5	76.0	0.33
8	56	145	300	EC4/6/8	89000120	4.4	11.5	145	170	0.36	58	71	1.5	45/90	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13	89000040	3.8	18.0	145	206	0.56	91	135	1.5	50/100	27	2	84.5	76.0	0.33
10	49	230	330	EC10*		7.0	17.0	225	250	0.34	86	100	3.0	55/110	27	2	84.5	76.0	0.33
13	95	165	525	EC13	89000040	4.3	17.3	165	206	0.48	87	115	1.5	50/100	27	2	84.5	76.0	0.33
15	55	310	450	EC15	89000199	8.5	23.5	310	360	0.34	119	145	3.0	55/85	50	1	150.0	135.5	0.55
18	57	370	600	EC18/20	89000206	9.0	27.0	370	440	0.33	136	170	3.5	50/90	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40	89000330	6.5	42.5	370	620	0.52	215	378	3.0	50/130	50	1	150.0	135.5	0.55
20	57	370	600	EC18/20	89000206	9.0	28.3	370	440	0.35	143	178	3.5	50/90	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40	89000330	6.5	45.1	370	620	0.55	228	401	3.0	50/130	50	1	150.0	135.5	0.55
22	62	400	Ø210	EC22		9.8	31.8	400	450	0.36	161	190	4.0	50/115	50	1	150.0	135.5	0.55
30	96	365	900	EC30		8.8	38.8	360	450	0.49	196	257	3.0	50/115	50	1	150.0	135.5	0.55
30	55	610	Ø224	EC30L		11.0	41.0	600	670	0.31	207	243	6.0	50/100	90	1	195.0	180.0	1.00
32	81	450	Ø305	EC32	89000311	10.2	42.2	440	580	0.44	213	295	4.0	55/130	50	1	150.0	135.5	0.55
32	135	265	1,200	EC32H*		4.2	34.7	265	485	0.60	175	337	2.0	35/55	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40	89000330	8.5	44.5	415	640	0.49	225	364	3.5	50/140	50	1	150.0	135.5	0.55
40	103	430	1,200	EC36/40	89000330	8.5	48.0	415	640	0.53	242	393	3.0	50/140	50	1	150.0	135.5	0.55
58	110	670	1,500	EC58/65	89000449	10.9	68.9	660	980	0.47	348	543	6.0	40/130	90	1	195.0	180.0	1.00
65	110	670	1,500	EC58/65	89000449	10.9	74.9	660	980	0.52	378	590	5.0	40/130	90	1	195.0	180.0	1.00
<b>Compact lamps</b>																			
5	35	180	TC-S	EC9	89000137	5.1	10.5	180	190	0.27	53	59	2.0	55/75	27	2	84.5	76.0	0.33
2x5	35	180	TC-S	EC13	89000040	4.6	15.4	175	206	0.40	78	96	1.5	50/100	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9	89000137	5.0	12.1	175	190	0.31	61	70	2.0	55/75	27	2	84.5	76.0	0.33
2x7	47	175	TC-S	EC13	89000040	4.3	18.5	165	206	0.51	93	122	1.5	50/100	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9	89000137	4.7	13.4	165	190	0.37	68	82	1.5	55/75	27	2	84.5	76.0	0.33
2x9	60	170	TC-S	EC13	89000040	4.0	21.8	155	206	0.64	110	154	1.5	50/100	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13	89000040	4.8	14.8	185	206	0.36	75	88	2.0	50/100	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13	89000040	4.6	15.1	175	206	0.39	76	94	1.5	50/100	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9	89000137	4.4	16.2	155	190	0.48	82	105	1.5	55/75	27	2	84.5	76.0	0.33
13	91	175	TC-D	EC13	89000040	4.4	17.4	170	206	0.47	88	112	1.5	50/100	27	2	84.5	76.0	0.33
13	59	285	TC-S	EC13L		7.1	20.1	285	315	0.32	102	118	3.0	35/65	50	1	150.0	135.5	0.55
13	91	175	TC-T	EC13	89000040	4.4	17.4	170	206	0.47	88	112	1.5	50/100	27	2	84.5	76.0	0.33
16	103	195	TC-DD	EC16		5.4	21.4	195	255	0.50	108	148	1.5	60/115	27	2	84.5	76.0	0.33
18	100	220	TC-D	EC18H	89000097	5.3	23.3	220	315	0.48	118	177	2.0	50/110	27	2	84.5	76.0	0.33
18	58	375	TC-F	EC18/20	89000206	9.0	27.0	370	440	0.33	136	170	3.5	50/90	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20	89000206	9.0	27.0	370	440	0.33	136	170	3.5	50/90	50	1	150.0	135.5	0.55
18	100	225	TC-T	EC18H	89000097	5.3	23.3	220	315	0.48	118	177	2.0	50/110	27	2	84.5	76.0	0.33
2x18	58	375	TC-L	EC36/40	89000330	6.5	42.5	370	620	0.52	215	378	3.0	50/130	50	1	150.0	135.5	0.55
21	101	270	TC-DD	EC21		5.6	25.6	270	350	0.43	129	176	3.0	40/80	50	1	150.0	135.5	0.60
24	87	345	TC-F	EC18/20	89000206	8.0	32.0	345	440	0.42	162	217	3.0	50/90	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20	89000206	8.0	32.0	345	440	0.42	162	217	3.0	50/90	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20	89000206	6.9	32.9	315	440	0.47	166	244	3.0	50/90	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20	89000206	6.9	33.4	315	440	0.48	169	247	3.0	50/90	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20	89000206	6.9	35.3	315	420	0.51	178	250	3.0	50/90	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40	89000330	8.5	44.5	415	640	0.49	225	364	3.5	50/140	50	1	150.0	135.5	0.55
36	106	435	TC-L	EC36/40	89000330	8.5	44.5	415	640	0.49	225	364	3.5	50/140	50	1	150.0	135.5	0.55
38	110	430	TC-DD	EC36/40	89000330	8.5	47.0	415	640	0.51	237	384	3.0	50/140	50	1	150.0	135.5	0.55

## Notes

Other wattages available on request.

\* Lamps not included in IEC 60081 or IEC 60901.

**220 V 60 Hz – EC energy control ballasts for Taiwan**

Lamp				Ballast		Electrical								Thermal		Physical			
wattage	voltage	current	length	type	article number	loss hot	input power	lamp current	lamp start current	circuit P F	line current	line start current	capacitor	normal/ abnormal	stack	figure	length	mtg centres	weight
W	V	mA	mm			W	W	mA	mA	cosφ	mA@0.9PF	mA@0.9PF	μF0.9PF	Δt	mm		mm	mm	kg

**Linear and circular lamps**

10	49	230	330	EC10*		6.6	16.0	225	250	0.32	81	94	3.0	55/110	27	2	84.5	76.0	0.33
20	59	350	580	EC18/20*		6.0	24.0	350	410	0.31	121	149	3.5	40/100	50	1	150.0	135.5	0.55
30	96	365	900	EC30		7.0	37.0	360	490	0.47	187	267	3.0	50/115	50	1	150.0	135.5	0.55
30	55	590	Ø233	EC30L*	89000446	9.3	40.0	590	670	0.31	202	241	6.0	45/90	90	1	195.0	180.0	1.00
32	81	450	Ø305	EC32		7.2	39.2	450	590	0.40	198	273	4.0	40/150	50	1	150.0	135.5	0.55
40	113	415	1,198	EC36/40*		6.6	43.0	415	590	0.47	217	324	3.5	40/150	50	1	150.0	135.5	0.55

## Notes

Other wattages available on request.

\* Lamps not included in IEC 60081 or IEC 60901.

**230 V 50 Hz – EC energy control ballasts**

Lamp				Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot W	input power W	lamp current mA	lamp start current mA	circuit PF cosφ	line current mA@0.9PF	line start current mA@0.9PF	capacitor μF0.9PF	normal/ abnormal Δt	stack mm	figure mm	length mm	mtg centres mm	weight kg
W	V	mA	mm																
<b>Linear and circular lamps</b>																			
4	29	170	150	EC4/6/8		5.5	10.0	165	170	0.26	48	52	2.0	60/95	27	2	84.5	76.0	0.33
6	42	160	225	EC4/6/8		EEI=B2	11.2	155	170	0.31	54	62	2.0	60/95	27	2	84.5	76.0	0.33
2x6	42	160	225	EC13	89000041	3.9	15.9	155	210	0.45	77	109	1.5	55/105	27	2	84.5	76.0	0.33
8	56	145	300	EC4/6/8		EEI=B2	11.9	145	170	0.36	58	71	1.5	60/95	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13	89000041	3.5	17.7	140	210	0.55	86	135	1.5	55/105	27	2	84.5	76.0	0.33
10	49	230	330	EC10*		6.8	16.8	225	245	0.32	81	93	3.0	40/105	50	1	150.0	135.5	0.55
13	95	165	525	EC13	89000041	EEI=B2	17.0	160	210	0.46	82	113	1.5	55/105	27	2	84.5	76.0	0.33
15	55	310	450	EC15		8.8	23.8	310	360	0.33	115	140	3.5	55/90	50	1	150.0	135.5	0.55
18	57	370	600	EC18/20		10.0	28.0	370	430	0.33	135	165	4.0	60/95	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40	89000334	7.2	43.2	370	580	0.51	209	344	3.5	50/130	50	1	150.0	135.5	0.55
20	57	370	600	EC18/20		10.0	29.3	370	430	0.34	142	173	4.0	60/95	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40	89000334	7.2	45.8	370	580	0.54	221	364	3.0	50/130	50	1	150.0	135.5	0.55
22	62	400	0210	EC22		11.0	33.0	400	450	0.36	159	188	5.0	65/105	50	1	150.0	135.5	0.55
30	96	365	900	EC30		9.9	39.9	360	450	0.48	193	253	3.5	65/105	50	1	150.0	135.5	0.55
30	55	610	0224	EC30L		14.5	44.5	600	660	0.32	215	248	7.0	55/100	90	1	195.0	180.0	1.00
32	81	450	0305	EC32		11.0	43.0	440	550	0.42	208	273	5.0	65/130	50	1	150.0	135.5	0.55
32	135	265	1,200	EC32H*		5.3	35.8	265	455	0.59	173	312	2.0	40/60	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40	89000334	10.0	46.0	415	630	0.48	222	354	4.0	55/160	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40(54mm)**		10.0	46.0	415	610	0.48	222	343	4.0	55/140	54	1	150.0	135.5	0.60
40	103	430	1,200	EC36/40	89000334	10.0	49.5	415	630	0.52	239	381	3.5	55/160	50	1	150.0	135.5	0.55
58	110	670	1,500	EC58/65		13.0	71.0	660	960	0.47	343	524	6.0	50/140	90	1	195.0	180.0	1.00
65	110	670	1,500	EC58/65		13.0	77.0	660	960	0.51	372	568	6.0	50/140	90	1	195.0	180.0	1.00
<b>Compact lamps</b>																			
5	35	180	TC-S	EC9	89000133	5.1	10.5	175	190	0.26	51	58	2.0	55/75	27	2	84.5	76.0	0.33
2x5	35	180	TC-S	EC13	89000041	4.4	15.2	175	210	0.38	73	92	2.0	55/105	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9	89000133	EEI=B2	12.1	170	190	0.31	58	69	2.0	55/75	27	2	84.5	76.0	0.33
2x7	47	175	TC-S	EC13	89000041	4.1	18.3	165	210	0.48	89	118	1.5	55/105	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9	89000133	EEI=B2	13.6	165	190	0.36	65	79	2.0	55/75	27	2	84.5	76.0	0.33
2x9	60	170	TC-S	EC13	89000041	3.9	21.7	155	210	0.61	105	149	1.5	55/105	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13	89000041	4.6	14.6	185	210	0.34	71	84	2.0	55/105	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13	89000041	4.4	14.9	175	210	0.37	72	91	2.0	55/105	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9	89000133	EEI=B2	16.2	150	190	0.47	78	104	1.5	55/75	27	2	84.5	76.0	0.33
13	91	175	TC-D	EC13	89000041	EEI=B2	17.3	170	210	0.44	83	108	2.0	55/105	27	2	84.5	76.0	0.33
13	91	175	TC-T	EC13	89000041	EEI=B2	17.3	170	210	0.44	83	108	2.0	55/105	27	2	84.5	76.0	0.33
18	58	375	TC-F	EC18/20		10.0	28.0	370	430	0.33	135	165	4.0	60/95	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20		10.0	28.0	370	430	0.33	135	165	4.0	60/95	50	1	150.0	135.5	0.55
2x18	58	375	TC-L	EC36/40	89000334	7.2	43.2	370	580	0.51	209	344	3.5	50/130	50	1	150.0	135.5	0.55
24	87	345	TC-F	EC18/20		8.9	32.9	345	430	0.42	159	208	3.5	60/95	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20		8.9	32.9	345	430	0.42	159	208	3.5	60/95	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20		7.7	33.7	315	430	0.46	163	233	3.0	60/95	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20		7.7	34.2	315	430	0.47	165	237	3.0	60/95	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20		7.7	36.1	315	410	0.50	174	238	3.0	60/95	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40	89000334	10.0	46.0	415	630	0.48	222	354	4.0	55/160	50	1	150.0	135.5	0.55
36	106	435	TC-L	EC36/40	89000334	10.0	46.0	415	630	0.48	222	354	4.0	55/160	50	1	150.0	135.5	0.55
38	110	430	TC-DD	EC36/40	89000334	10.0	48.5	415	630	0.51	234	373	3.5	55/160	50	1	150.0	135.5	0.55

## Notes

Other wattages available on request.

\* Lamps not included in IEC 60081 or IEC 60901.

\*\* Ballasts suitable for use in Class F luminaires.

Refer to Energy Classification System table for ballasts from CELMA and/or MEPS.

## 240 V 50 Hz – EC energy control ballasts

Lamp				Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot	input power	lamp current	lamp start current	circuit P F	line current	line start current	capacitor	normal/ abnormal	stack	figure	length	mtg centres	weight
W	V	mA	mm			W	W	mA	mA	cosφ	mA@0.9PF	mA@0.9PF	μF@0.9PF	Δt	mm		mm	mm	kg

## Linear and circular lamps

4	29	170	150	EC4/6/8	89000114	5.5	10.0	165	170	0.25	46	50	2.0	60/95	27	2	84.5	76.0	0.33
6	42	160	225	EC4/6/8	89000114	EEI=B2	11.2	155	170	0.30	52	60	2.0	60/95	27	2	84.5	76.0	0.33
2x6	42	160	225	EC13	89000037	4.4	16.4	160	215	0.43	76	107	1.5	55/105	27	2	84.5	76.0	0.33
8	56	145	300	EC4/6/8	89000114	EEI=B2	11.9	145	170	0.34	55	68	1.5	60/95	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13	89000037	4.0	18.2	145	215	0.52	84	131	1.5	55/105	27	2	84.5	76.0	0.33
10	49	230	330	EC10*	89000184	7.0	17.0	225	245	0.31	79	90	3.0	40/105	50	1	150.0	135.5	0.55
13	95	165	525	EC13	89000037	EEI=B2	17.5	165	215	0.44	81	111	1.5	55/105	27	2	84.5	76.0	0.33
15	55	310	450	EC15		9.0	24.0	310	360	0.32	111	135	3.5	60/90	50	1	150.0	135.5	0.55
15	57	300	550	EC15 ES8*		9.0	24.0	300	340	0.33	111	132	3.5	50/85	50	1	150.0	135.5	0.55
18	57	370	600	EC18/20	89000200	10.3	28.3	370	425	0.32	131	158	4.0	60/95	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40	89000319	7.5	43.5	370	560	0.49	201	320	3.5	50/130	50	1	150.0	135.5	0.55
20	57	370	600	EC18/20	89000200	10.3	29.6	370	425	0.33	137	165	4.0	60/95	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40	89000319	7.5	46.1	370	560	0.52	213	339	3.0	50/130	50	1	150.0	135.5	0.55
22	62	400	Ø210	EC22	89000263	11.5	33.5	400	450	0.35	155	183	5.0	65/135	50	1	150.0	135.5	0.55
23		290	970	EC18/20	89000200	7.9	27.2	290	425	0.39	126	194	3.0	60/95	50	1	150.0	135.5	0.55
30	96	365	900	EC30		10.5	40.5	365	450	0.46	187	243	3.5	65/135	50	1	150.0	135.5	0.55
30	55	610	Ø224	EC30L		15.0	45.0	600	660	0.31	208	241	7.0	55/100	90	1	195.0	180.0	1.00
32	81	450	Ø305	EC32	89000307	11.0	43.0	430	520	0.42	199	253	4.0	60/130	50	1	150.0	135.5	0.55
32	135	265	1,200	EC32H*		5.9	36.4	265	445	0.57	169	297	2.0	40/60	50	1	150.0	135.5	0.55
33	103	380	1,150	EC33 ES8*		9.5	42.5	380	500	0.47	197	272	3.5	50/130	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40	89000319	10.0	46.0	415	625	0.46	213	337	4.0	60/160	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40(54mm)**		10.0	46.0	415	605	0.46	213	326	4.0	60/145	54	1	150.0	135.5	0.60
40	103	430	1,200	EC36/40	89000319	10.0	49.5	415	625	0.50	229	362	3.5	60/160	50	1	150.0	135.5	0.55
58	110	670	1,500	EC58/65		13.0	71.0	660	940	0.45	329	492	6.0	60/145	90	1	195.0	180.0	1.00
65	110	670	1,500	EC58/65		13.0	77.0	660	940	0.49	356	533	6.0	60/145	90	1	195.0	180.0	1.00
75	120	670	1,800	EC75		12.5	87.5	660	950	0.55	405	612	5.0	55/150	90	1	195.0	180.0	1.00

## Compact lamps

5	35	180	TC-S	EC9	89000128	5.7	11.1	180	187	0.26	51	56	2.0	60/75	27	2	84.5	76.0	0.33
2x5	35	180	TC-S	EC13	89000037	4.8	15.6	175	215	0.37	72	93	2.0	55/105	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9	89000128	EEI=B2	12.6	175	187	0.30	58	65	2.0	60/75	27	2	84.5	76.0	0.33
2x7	47	175	TC-S	EC13	89000037	4.5	18.7	165	215	0.47	87	118	1.5	55/105	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9	89000128	EEI=B2	13.9	165	187	0.35	64	77	2.0	60/75	27	2	84.5	76.0	0.33
2x9	60	170	TC-S	EC13	89000037	4.2	22.0	155	215	0.59	102	149	1.5	55/105	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13	89000037	5.0	15.0	185	215	0.34	70	85	2.0	55/105	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13	89000037	4.8	15.3	175	215	0.36	71	91	2.0	55/105	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9	89000128	EEI=B2	16.7	155	187	0.45	77	98	1.5	60/75	27	2	84.5	76.0	0.33
13	91	175	TC-D	EC13	89000037	EEI=B2	17.6	170	215	0.43	82	108	2.0	55/105	27	2	84.5	76.0	0.33
13	91	175	TC-T	EC13	89000037	EEI=B2	17.6	170	215	0.43	82	108	2.0	55/105	27	2	84.5	76.0	0.33
18	58	375	TC-F	EC18/20	89000200	10.3	28.3	370	425	0.32	131	158	4.0	60/95	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20	89000200	10.3	28.3	370	425	0.32	131	158	4.0	60/95	50	1	150.0	135.5	0.55
2x18	58	375	TC-L	EC36/40	89000319	7.5	43.5	370	560	0.49	201	320	3.5	50/130	50	1	150.0	135.5	0.55
24	87	345	TC-F	EC18/20	89000200	9.2	33.2	345	425	0.40	154	199	3.5	60/95	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20	89000200	9.2	33.2	345	425	0.40	154	199	3.5	60/95	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20	89000200	7.9	33.9	315	425	0.45	157	222	3.0	60/95	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20	89000200	7.9	34.4	315	425	0.45	159	226	3.0	60/95	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20	89000200	7.9	36.3	315	410	0.48	168	230	3.0	60/95	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40	89000319	10.0	46.0	415	625	0.46	213	337	4.0	60/160	50	1	150.0	135.5	0.55
36	106	435	TC-L	EC36/40	89000319	10.0	46.0	415	625	0.46	213	337	4.0	60/160	50	1	150.0	135.5	0.55
38	110	430	TC-DD	EC36/40	89000319	10.0	48.5	415	625	0.49	225	355	3.5	60/160	50	1	150.0	135.5	0.55

## Notes

Other wattages available on request.

\* Lamps not included in IEC 60081 or IEC 60901.

\*\* Ballasts suitable for use in Class F luminaires.

Refer to Energy Classification System table for ballasts from CELMA and/or MEPS.

**250 V 50 Hz – EC energy control ballasts**

Lamp				Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot	input power	lamp current	lamp start current	circuit P F	line current mA@0.9PF	line start current mA@0.9PF	capacitor μF0.9PF	normal/ abnormal	stack	figure	length mm	mtg centres	weight kg
W	V	mA	mm			W	W	mA	mA	cosφ				Δt	mm	mm	mm		
<b>Linear and circular lamps</b>																			
4	29	170	150	EC4/6/8		6.0	10.5	165	170	0.25	47	50	2.0	60/95	27	2	84.5	76.0	0.33
6	42	160	225	EC4/6/8		EEI=B2	11.6	155	170	0.30	52	60	2.0	60/95	27	2	84.5	76.0	0.33
2x6	42	160	225	EC13		4.8	16.8	160	215	0.42	75	106	1.5	55/105	27	2	84.5	76.0	0.33
8	56	145	300	EC4/6/8		EEI=B2	12.4	145	170	0.34	55	68	1.5	60/95	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13		4.4	18.6	145	215	0.51	83	129	1.5	55/105	27	2	84.5	76.0	0.33
10	49	230	330	EC10*		7.2	17.2	225	245	0.31	76	87	3.0	40/105	50	1	150.0	135.5	0.55
13	95	165	525	EC13		EEI=B2	18.0	165	215	0.44	80	109	1.5	55/105	27	2	84.5	76.0	0.33
15	55	310	450	EC15		9.2	24.2	310	360	0.31	108	131	3.5	60/90	50	1	150.0	135.5	0.55
18	57	370	600	EC18/20		10.6	28.6	370	425	0.31	127	153	4.0	60/95	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40		7.8	43.8	370	560	0.47	195	309	3.5	50/130	50	1	150.0	135.5	0.55
20	57	370	600	EC18/20		10.6	29.9	370	425	0.32	133	160	4.0	60/95	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40		7.8	46.4	370	560	0.50	206	328	3.0	50/130	50	1	150.0	135.5	0.55
22	62	400	0210	EC22		12.0	34.0	400	450	0.34	151	179	4.0	65/135	50	1	150.0	135.5	0.55
30	96	365	900	EC30		11.0	41.0	365	450	0.45	182	236	3.5	65/135	50	1	150.0	135.5	0.55
30	55	610	0224	EC30L		15.5	45.5	600	660	0.30	202	234	7.0	55/100	90	1	195.0	180.0	1.00
32	81	450	0305	EC32	89000310	11.0	43.0	430	520	0.40	191	243	4.0	65/130	50	1	150.0	135.5	0.55
32	135	265	1,200	EC32H*		6.0	36.5	265	445	0.55	162	286	2.0	40/60	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40		10.0	46.0	415	625	0.44	204	323	4.0	60/160	50	1	150.0	135.5	0.55
40	103	430	1,200	EC36/40		10.0	49.5	415	625	0.48	220	348	3.5	60/160	50	1	150.0	135.5	0.55
58	110	670	1,500	EC58/65		13.0	71.0	660	940	0.43	316	472	6.0	60/145	90	1	195.0	180.0	1.00
65	110	670	1,500	EC58/65		13.0	77.0	660	940	0.47	342	512	6.0	60/145	90	1	195.0	180.0	1.00
<b>Compact lamps</b>																			
5	35	180	TC-S	EC9		6.2	11.6	180	187	0.26	51	56	2.0	60/75	27	2	84.5	76.0	0.33
2x5	35	180	TC-S	EC13		5.3	16.1	175	215	0.37	72	92	2.0	55/105	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9		EEI=B2	13.1	175	187	0.30	58	65	2.0	60/75	27	2	84.5	76.0	0.33
2x7	47	175	TC-S	EC13		5.0	19.2	165	215	0.47	85	117	1.5	55/105	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9		EEI=B2	14.4	165	187	0.35	64	76	2.0	60/75	27	2	84.5	76.0	0.33
2x9	60	170	TC-S	EC13		4.7	22.5	155	215	0.58	100	146	1.5	55/105	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13		5.6	15.6	185	215	0.34	69	85	2.0	55/105	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13		5.3	15.8	175	215	0.36	70	91	2.0	55/105	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9		EEI=B2	17.1	155	187	0.44	76	96	1.5	60/75	27	2	84.5	76.0	0.33
13	91	175	TC-D	EC13		EEI=B2	18.2	170	215	0.43	81	107	1.5	55/105	27	2	84.5	76.0	0.33
13	91	175	TC-T	EC13		EEI=B2	18.2	170	215	0.43	81	107	1.5	55/105	27	2	84.5	76.0	0.33
18	58	375	TC-F	EC18/20		10.6	28.6	370	425	0.31	127	153	4.0	60/95	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20		10.6	28.6	370	425	0.31	127	153	4.0	60/95	50	1	150.0	135.5	0.55
2x18	58	375	TC-L	EC36/40		7.8	43.8	370	560	0.47	195	309	3.5	50/130	50	1	150.0	135.5	0.55
24	87	345	TC-F	EC18/20		9.5	33.5	345	425	0.39	149	192	3.5	60/95	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20		9.5	33.5	345	425	0.39	149	192	3.5	60/95	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20		8.1	34.1	315	425	0.43	152	215	3.0	60/95	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20		8.1	34.6	315	425	0.44	154	218	3.0	60/95	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20		8.1	36.5	315	410	0.46	162	222	3.0	60/95	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40		10.0	46.0	415	625	0.44	204	323	4.0	60/160	50	1	150.0	135.5	0.55
36	106	435	TC-L	EC36/40		10.0	46.0	415	625	0.44	204	323	4.0	60/160	50	1	150.0	135.5	0.55
38	110	430	TC-DD	EC36/40		10.0	48.5	415	625	0.47	216	341	3.5	60/160	50	1	150.0	135.5	0.55

## Notes

Other wattages available on request.


\* Lamps not included in IEC 60081 or IEC 60901.

Refer to Energy Classification System table for ballasts from CELMA and/or MEPS.



## EC optimized ballasts

figure 1

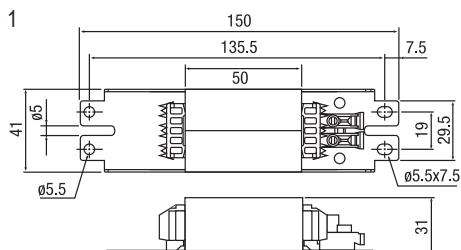

50 mm stack


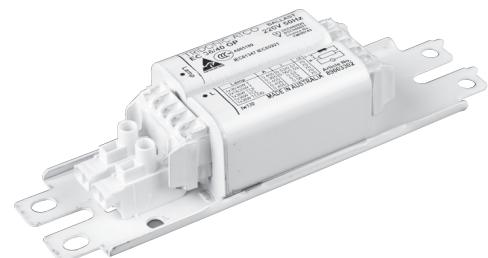


figure 2

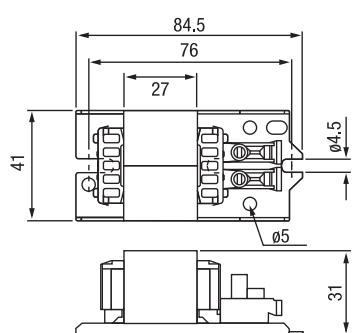

27 mm stack

- slim cross-section and compact
- low magnetic stray field
- long service life
- vacuum impregnation
- non-audible noise level
- nomex class "H" gap for fixed calibration
- resistant to moisture and condensation
- 10 A push-in terminals (screw terminals on request)
- maximum winding temperature tw 130 °C

### 100 % final testing

- continuity
- winding short circuit
- core to coil high voltage test
- operating values

**220 V 50 Hz – EC optimised ballasts**

Lamp				Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current	line start current	capacitor	normal/ abnormal	stack	figure	length	mtg centres	weight
W	V	mA	mm			W	W	mA	mA	cosφ	mA@0.9PF	mA@0.9PF	μF0.9PF	Δt	mm	mm	mm	kg	

**Linear and circular lamps**

2x6	42	160	225	EC13		4.8	16.8	160	220	0.48	85	123	1.5	55/110	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13		4.4	18.6	145	220	0.58	94	150	1.5	55/110	27	2	84.5	76.0	0.33
13	95	165	525	EC13		5.0	18.0	165	220	0.50	91	127	1.5	55/110	27	2	84.5	76.0	0.33
18	57	370	600	EC18/20	89003329	11.3	29.3	370	440	0.36	148	185	5.0	65/100	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40	89003302	8.9	44.9	365	640	0.56	227	418	3.0	70/160	50	1	150.0	135.5	0.55
20	57	370	600	EC18/20	89003329	11.3	30.6	370	440	0.38	155	193	4.0	65/100	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40	89003302	8.9	47.5	365	640	0.59	240	442	3.0	70/160	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40	89003302	11.0	47.0	405	640	0.53	237	394	3.5	70/160	50	1	150.0	135.5	0.55
40	103	430	1,200	EC36/40	89003302	11.0	50.5	405	640	0.57	255	423	3.5	70/160	50	1	150.0	135.5	0.55

**Compact lamps**

5	35	180	TC-S	EC9		6.2	11.6	180	192	0.29	58	65	3.0	55/80	27	1	84.5	76.0	0.33
2x5	35	180	TC-S	EC13		5.3	16.1	175	220	0.42	81	107	2.0	55/110	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9		6.0	13.1	175	192	0.34	66	76	2.0	55/80	27	1	84.5	76.0	0.33
2x7	47	175	TC-S	EC13		5.0	19.2	165	220	0.53	97	136	1.5	55/110	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9		5.7	14.4	165	192	0.40	73	89	2.0	55/80	27	1	84.5	76.0	0.33
2x9	60	170	TC-S	EC13		4.7	22.5	155	220	0.66	114	169	1.5	55/110	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13		5.6	15.6	185	220	0.38	79	98	2.0	55/110	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13		5.3	15.8	175	220	0.41	80	105	2.0	55/110	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9		5.3	17.1	155	192	0.50	86	112	1.5	55/80	27	1	84.5	76.0	0.33
13	91	175	TC-D	EC13		5.2	18.2	170	220	0.49	92	125	2.0	55/110	27	2	84.5	76.0	0.33
13	91	175	TC-T	EC13		5.2	18.2	170	220	0.49	92	125	2.0	55/110	27	2	84.5	76.0	0.33
18	100	220	TC-D	EC18H		6.8	24.8	220	285	0.51	125	170	2.0	65/125	27	1	84.5	76.0	0.33
18	58	375	TC-F	EC18/20	89003329	11.3	29.3	370	440	0.36	148	185	5.0	65/100	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20	89003329	11.3	29.3	370	440	0.36	148	185	5.0	65/100	50	1	150.0	135.5	0.55
18	100	225	TC-T	EC18H		6.8	24.8	220	285	0.51	125	170	2.0	65/125	27	1	84.5	76.0	0.33
2x18	58	375	TC-L	EC36/40	89003302	8.9	44.9	365	640	0.56	227	418	3.0	70/160	50	1	150.0	135.5	0.55
24	87	345	TC-F	EC18/20	89003329	10.1	34.1	345	440	0.45	172	231	3.5	65/100	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20	89003329	10.1	34.1	345	440	0.45	172	231	3.5	65/100	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20	89003329	8.7	34.7	315	440	0.50	175	257	3.0	65/100	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20	89003329	8.7	35.2	315	440	0.51	178	260	3.0	65/100	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20	89003329	8.7	37.1	315	440	0.53	187	275	3.0	65/100	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40	89003302	11.0	47.0	405	640	0.53	237	394	3.5	70/160	50	1	150.0	135.5	0.55
36	106	435	TC-L	EC36/40	89003302	11.0	47.0	405	640	0.53	237	394	3.5	70/160	50	1	150.0	135.5	0.55
38	110	430	TC-DD	EC36/40	89003302	11.0	49.5	405	640	0.56	250	415	3.5	70/160	50	1	150.0	135.5	0.55

## Notes

Other wattages available on request.

**220 V 60 Hz – EC optimised ballasts**

Lamp				Ballast		Electrical								Thermal		Physical			
wattage	voltage	current	length	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current	line start current	capacitor	normal/ abnormal	stack	figure	length	mtg centres	weight
W	V	mA	mm			W	W	mA	mA	cosφ	mA@0.9PF	mA@0.9PF	μF0.9PF	Δt	mm	mm	mm	kg	
<b>Linear and circular lamps</b>																			
2x6	42	160	225	EC13		4.8	16.8	160	220	0.48	85	123	1.5	55/110	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13		4.4	18.6	145	220	0.58	94	150	1.5	55/110	27	2	84.5	76.0	0.33
13	95	165	525	EC13		5.0	18.0	165	220	0.50	91	127	1.5	55/110	27	2	84.5	76.0	0.33
18	57	370	600	EC18/20		11.3	29.3	370	440	0.36	148	185	3.5	65/100	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40		8.9	44.9	365	640	0.56	227	418	3.0	65/160	50	1	150.0	135.5	0.55
20	57	370	600	EC18/20		11.3	30.6	370	440	0.38	155	193	3.5	65/100	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40		8.9	47.5	365	640	0.59	240	442	3.0	65/160	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40		11.0	47.0	405	640	0.53	237	394	3.0	65/160	50	1	150.0	135.5	0.55
40	103	430	1,200	EC36/40		11.0	50.5	405	640	0.57	255	423	3.0	65/160	50	1	150.0	135.5	0.55
<b>Compact lamps</b>																			
5	35	180	TC-S	EC9		6.2	11.6	180	192	0.29	58	65	2.0	55/80	27	1	84.5	76.0	0.33
2x5	35	180	TC-S	EC13		5.3	16.1	175	220	0.42	81	107	1.5	55/110	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9		6.0	13.1	175	192	0.34	66	76	2.0	55/80	27	1	84.5	76.0	0.33
2x7	47	175	TC-S	EC13		5.0	19.2	165	220	0.53	97	136	1.5	55/110	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9		5.7	14.4	165	192	0.40	73	89	1.5	55/80	27	1	84.5	76.0	0.33
2x9	60	170	TC-S	EC13		4.7	22.5	155	220	0.66	114	169	1.5	55/110	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13		5.6	15.6	185	220	0.38	79	98	2.0	55/110	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13		5.3	15.8	175	220	0.41	80	105	1.5	55/110	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9		5.3	17.1	155	192	0.50	86	112	1.5	55/80	27	1	84.5	76.0	0.33
13	91	175	TC-D	EC13		5.2	18.2	170	220	0.49	92	125	1.5	55/110	27	2	84.5	76.0	0.33
13	91	175	TC-T	EC13		5.2	18.2	170	220	0.49	92	125	1.5	55/110	27	2	84.5	76.0	0.33
18	100	220	TC-D	EC18H		6.8	24.8	220	285	0.51	125	170	2.0	65/125	27	1	84.5	76.0	0.33
18	58	375	TC-F	EC18/20		11.3	29.3	370	440	0.36	148	185	3.5	65/100	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20		11.3	29.3	370	440	0.36	148	185	3.5	65/100	50	1	150.0	135.5	0.55
18	100	225	TC-T	EC18H		6.8	24.8	220	285	0.51	125	170	2.0	65/125	27	1	84.5	76.0	0.33
2x18	58	375	TC-L	EC36/40		8.9	44.9	365	640	0.56	227	418	3.0	65/160	50	1	150.0	135.5	0.55
24	87	345	TC-F	EC18/20		10.1	34.1	345	440	0.45	172	231	3.0	65/100	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20		10.1	34.1	345	440	0.45	172	231	3.0	65/100	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20		8.7	34.7	315	440	0.50	175	257	3.0	65/100	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20		8.7	35.2	315	440	0.51	178	260	3.0	65/100	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20		8.7	37.1	315	440	0.53	187	275	3.0	65/100	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40		11.0	47.0	405	640	0.53	237	394	3.0	65/160	50	1	150.0	135.5	0.55
36	106	435	TC-L	EC36/40		11.0	47.0	405	640	0.53	237	394	3.0	65/160	50	1	150.0	135.5	0.55
38	110	430	TC-DD	EC36/40		11.0	49.5	405	640	0.56	250	415	3.0	65/160	50	1	150.0	135.5	0.55

## Notes

Other wattages available on request.

**230 V 50 Hz – EC optimised ballasts**

Lamp				Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	length	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current mA@0.9PF	line start current mA@0.9PF	capacitor $\mu\text{F}0.9\text{PF}$	normal/ abnormal $\Delta t$	stack mm	figure	length mm	mtg centres mm	weight kg
W	V	mA	mm			W	W	mA	mA	cos $\phi$					mm		mm	kg	

**Linear and circular lamps**

2x6	42	160	225	EC13		4.8	16.8	160	215	0.46	81	115	1.5	60/115	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13		4.4	18.6	145	215	0.56	90	140	1.5	60/115	27	2	84.5	76.0	0.33
13	95	165	525	EC13		5.0	18.0	165	215	0.47	87	119	1.5	60/115	27	2	84.5	76.0	0.33
18	57	370	600	EC18/20		12.0	30.0	370	430	0.35	145	177	4.0	70/105	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40	89002896	9.7	45.7	365	630	0.54	221	400	3.0	70/170	50	1	150.0	135.5	0.55
20	57	370	600	EC18/20		12.0	31.3	370	430	0.37	151	185	4.0	70/105	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40	89002896	9.7	48.3	365	630	0.58	233	423	3.0	70/170	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40	89002896	12.0	48.0	405	630	0.52	232	379	3.5	70/170	50	1	150.0	135.5	0.55
40	103	430	1,200	EC36/40	89002896	12.0	51.5	405	630	0.55	249	406	3.5	70/170	50	1	150.0	135.5	0.55

**Compact lamps**

5	35	180	TC-S	EC9		6.2	11.6	180	187	0.28	56	61	3.0	60/85	27	1	84.5	76.0	0.33
2x5	35	180	TC-S	EC13		5.3	16.1	175	215	0.40	78	100	2.0	60/115	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9		6.0	13.1	175	187	0.33	63	71	2.0	60/85	27	1	84.5	76.0	0.33
2x7	47	175	TC-S	EC13		5.0	19.2	165	215	0.51	93	127	1.5	60/115	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9		5.7	14.4	165	187	0.38	69	83	2.0	60/85	27	1	84.5	76.0	0.33
2x9	60	170	TC-S	EC13		4.7	22.5	155	215	0.63	109	158	1.5	60/115	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13		5.6	15.6	185	215	0.37	75	92	2.0	60/115	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13		5.3	15.8	175	215	0.39	76	98	2.0	60/115	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9		5.3	17.1	155	187	0.48	83	105	1.5	60/85	27	1	84.5	76.0	0.33
13	91	175	TC-D	EC13		5.2	18.2	170	215	0.46	88	116	2.0	60/115	27	2	84.5	76.0	0.33
13	91	175	TC-T	EC13		5.2	18.2	170	215	0.46	88	116	2.0	60/115	27	2	84.5	76.0	0.33
18	100	220	TC-D	EC18H		7.2	25.2	220	280	0.50	122	163	2.0	70/130	27	1	84.5	76.0	0.33
18	58	375	TC-F	EC18/20		12.0	30.0	370	430	0.35	145	177	4.0	70/105	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20		12.0	30.0	370	430	0.35	145	177	4.0	70/105	50	1	150.0	135.5	0.55
18	100	225	TC-T	EC18H		7.2	25.2	220	280	0.50	122	163	2.0	70/130	27	1	84.5	76.0	0.33
2x18	58	375	TC-L	EC36/40	89002896	9.7	45.7	365	630	0.54	221	400	3.0	70/170	50	1	150.0	135.5	0.55
24	87	345	TC-F	EC18/20		10.7	34.7	345	430	0.44	168	220	3.5	70/105	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20		10.7	34.7	345	430	0.44	168	220	3.5	70/105	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20		9.2	35.2	315	430	0.49	170	244	3.0	70/105	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20		9.2	35.7	315	430	0.49	172	247	3.0	70/105	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20		9.2	37.6	315	430	0.52	182	260	3.0	70/105	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40	89002896	12.0	48.0	405	630	0.52	232	379	3.5	70/170	50	1	150.0	135.5	0.55
36	106	435	TC-L	EC36/40	89002896	12.0	48.0	405	630	0.52	232	379	3.5	70/170	50	1	150.0	135.5	0.55
38	110	430	TC-DD	EC36/40	89002896	12.0	50.5	405	630	0.54	244	398	3.5	70/170	50	1	150.0	135.5	0.55

**Notes**

Other wattages available on request.

**240 V 50 Hz – EC optimised ballasts**

Lamp				Ballast		Electrical								Thermal		Physical			
wattage	voltage	current	length	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current mA@0.9PF	line start current mA@0.9PF	capacitor μF0.9PF	normal/ abnormal Δt	stack mm	figure mm	length mm	mtg centres mm	weight kg
W	V	mA	mm			W	W	mA	mA	cosφ					mm	mm	mm	kg	

**Linear and circular lamps**

2x6	42	160	225	EC13		5.3	17.3	160	215	0.45	80	113	1.5	60/115	27	2	84.5	76.0	0.33
2x8	56	145	300	EC13		4.8	19.0	145	215	0.55	88	137	1.5	60/115	27	2	84.5	76.0	0.33
13	95	165	525	EC13		5.5	18.5	165	215	0.47	86	117	1.5	60/115	27	2	84.5	76.0	0.33
18	57	370	600	EC18/20	89002968	12.8	30.8	370	425	0.35	143	172	4.0	70/105	50	1	150.0	135.5	0.55
2x18	57	370	600	EC36/40	89003304	10.2	46.2	365	625	0.53	214	385	3.0	70/170	50	1	150.0	135.5	0.55
20	57	370	600	EC18/20	89002968	12.8	32.1	370	425	0.36	149	179	4.0	70/105	50	1	150.0	135.5	0.55
2x20	57	370	600	EC36/40	89003304	10.2	48.8	365	625	0.56	226	406	3.0	70/170	50	1	150.0	135.5	0.55
36	103	430	1,200	EC36/40	89003304	12.5	48.5	405	625	0.50	225	364	3.5	70/170	50	1	150.0	135.5	0.55
40	103	430	1,200	EC36/40	89003304	12.5	52.0	405	625	0.53	241	390	3.5	70/170	50	1	150.0	135.5	0.55

**Compact lamps**


5	35	180	TC-S	EC9		6.7	12.1	180	187	0.28	56	61	2.0	60/85	27	1	84.5	76.0	0.33
2x5	35	180	TC-S	EC13		5.8	16.6	175	215	0.40	77	99	2.0	60/115	27	2	84.5	76.0	0.33
7	47	175	TC-S	EC9		6.5	13.6	175	187	0.32	63	71	2.0	60/85	27	1	84.5	76.0	0.33
2x7	47	175	TC-S	EC13		5.5	19.7	165	215	0.50	91	125	1.5	60/115	27	2	84.5	76.0	0.33
9	60	170	TC-S	EC9		6.1	14.8	165	187	0.37	69	82	2.0	60/85	27	1	84.5	76.0	0.33
2x9	60	170	TC-S	EC13		5.2	23.0	155	215	0.62	106	155	1.5	60/115	27	2	84.5	76.0	0.33
10	64	190	TC-D	EC13		6.2	16.2	185	215	0.36	75	91	2.0	60/115	27	2	84.5	76.0	0.33
10	72	180	TC-DD	EC13		5.8	16.3	175	215	0.39	76	98	2.0	60/115	27	2	84.5	76.0	0.33
11	91	155	TC-S	EC9		5.8	17.6	155	187	0.47	81	103	1.5	60/85	27	1	84.5	76.0	0.33
13	91	175	TC-D	EC13		5.7	18.7	170	215	0.46	86	115	1.5	60/115	27	2	84.5	76.0	0.33
13	91	175	TC-T	EC13		5.7	18.7	170	215	0.46	86	115	1.5	60/115	27	2	84.5	76.0	0.33
18	100	220	TC-D	EC18H		7.5	25.5	220	280	0.48	118	158	2.0	70/130	27	1	84.5	76.0	0.33
18	58	375	TC-F	EC18/20	89002968	12.8	30.8	370	425	0.35	143	172	4.0	70/105	50	1	150.0	135.5	0.55
18	58	375	TC-L	EC18/20	89002968	12.8	30.8	370	425	0.35	143	172	4.0	70/105	50	1	150.0	135.5	0.55
18	100	225	TC-T	EC18H		7.5	25.5	220	280	0.48	118	158	2.0	70/130	27	1	84.5	76.0	0.33
2x18	58	375	TC-L	EC36/40	89003304	10.2	46.2	365	625	0.53	214	385	3.0	70/170	50	1	150.0	135.5	0.55
24	87	345	TC-F	EC18/20	89002968	11.4	35.4	345	425	0.43	164	212	3.5	70/105	50	1	150.0	135.5	0.55
24	87	345	TC-L	EC18/20	89002968	11.4	35.4	345	425	0.43	164	212	3.5	70/105	50	1	150.0	135.5	0.55
26	105	325	TC-D	EC18/20	89002968	9.8	35.8	315	425	0.47	166	235	3.0	70/105	50	1	150.0	135.5	0.55
26	105	325	TC-T	EC18/20	89002968	9.8	36.3	315	425	0.48	168	238	3.0	70/105	50	1	150.0	135.5	0.55
28	108	320	TC-DD	EC18/20	89002968	9.8	38.2	315	425	0.51	177	251	3.0	70/105	50	1	150.0	135.5	0.55
36	106	435	TC-F	EC36/40	89003304	12.5	48.5	405	625	0.50	225	364	3.5	70/170	50	1	150.0	135.5	0.55
36	106	435	TC-L	EC36/40	89003304	12.5	48.5	405	625	0.50	225	364	3.5	70/170	50	1	150.0	135.5	0.55
38	110	430	TC-DD	EC36/40	89003304	12.5	51.0	405	625	0.52	236	383	3.5	70/170	50	1	150.0	135.5	0.55

## Notes


Other wattages available on request.

**EC lean ballasts**

figure 1

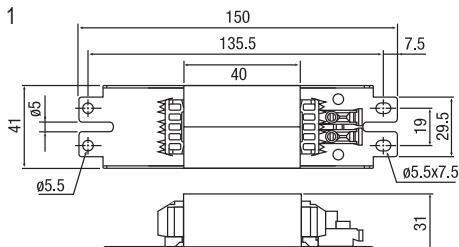

40 mm stack

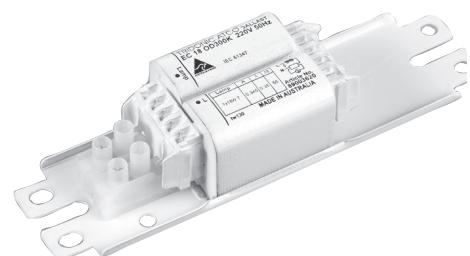

- slim cross-section and compact
- low magnetic stray field
- long service life
- vacuum impregnation
- non-audible noise level
- nomex class "H" gap for fixed calibration
- resistant to moisture and condensation
- 10 A push-in terminals (screw terminals on request)
- maximum winding temperature tw 130 °C

**100 % final testing**

- continuity
- winding short circuit
- core to coil high voltage test
- operating values

**220 V 50 Hz, 220 V 60 Hz and 230 V 50 Hz – EC lean ballasts**

Lamp				Ballast		Electrical								Thermal		Physical			
wattage	voltage	current	length	type	article number	loss hot W	input power W	lamp current mA	lamp start current mA	circuit P F cosφ	line current mA@0.9PF	line start current mA@0.9PF	capacitor μF@0.9PF	normal/ abnormal Δt	stack mm	figure mm	length mm	mtg centres mm	weight kg
W	V	mA	mm																

**220 V 50 Hz****Linear lamps**

18	57	370	600	EC 18 OD100K	89003600	9.1	26.7	345	435	0.36	130	170	4.0	55/90	40	1	150.0	135.5	0.45
18	57	370	600	EC 18 OD300K *	89003620	9.1	26.7	345	435	0.36	130	170	4.0	55/90	40	1	150.0	135.5	0.45
36	103	430	1,200	EC 36 OD100K	89003587	8	40.1	370	830	0.49	200	467	3.5	45/200	40	1	150.0	135.5	0.45
36	103	430	1,200	EC 36 OD300K *	89003606	8	40.1	370	830	0.49	200	467	3.5	45/200	40	1	150.0	135.5	0.45

**220 V 60 Hz****Linear lamps**

18	57	370	600	EC 18 OD103K	89003601	8.8	26.6	350	435	0.35	190	145	3.5	55/90	40	1	150.0	135.5	0.45
18	57	370	600	EC 18 OD303K *	89003621	8.8	26.6	350	435	0.35	190	145	3.5	55/90	40	1	150.0	135.5	0.45
36	103	430	1,200	EC 36 OD103K	89003602	8	41.8	385	665	0.49	210	375	3.0	50/180	40	1	150.0	135.5	0.45
36	103	430	1,200	EC 36 OD303K *	89003623	8	41.8	385	665	0.49	210	375	3.0	50/180	40	1	150.0	135.5	0.45

**230 V 50 Hz****Linear lamps**

18	57	370	600	EC 18 OD101K	89003603	9.6	27.3	350	465	0.34	125	175	4.0	60/110	40	1	150.0	135.5	0.45
18	57	370	600	EC 18 OD301K *	89003622	9.6	27.3	350	465	0.34	125	175	4.0	60/110	40	1	150.0	135.5	0.45
36	103	430	1,200	EC 36 OD101K	89003604	8.8	39.6	360	650	0.49	185	355	3.5	55/200	40	1	150.0	135.5	0.45
36	103	430	1,200	EC 36 OD301K *	89003624	8.8	39.6	360	650	0.49	185	355	3.5	55/200	40	1	150.0	135.5	0.45

## Notes

Other wattages available on request.

\* With screw terminals

Index	page
<b>HID lamps</b>	
High-pressure mercury vapour (MV) lamps	41
Metal halide (MH) lamps	42
High-pressure sodium vapour (HPS) lamps	44
Low-pressure sodium vapour (LPS) lamps	45
<b>Magnetic ballasts for HID lamps</b>	46
<b>Technical tips for HID lamp circuits</b>	48
<b>Remote assemblies for high-intensity discharge lamps</b>	49
<b>HID lamp ballast guide</b>	50
<b>EC type HID ballasts</b>	65
220 V 50 Hz and 220 V 60 Hz – EC ballasts	66
230 V 50 Hz and 240 V 50 Hz – EC ballasts	67
<b>OM type HID ballasts</b>	68
220 V 50 Hz – OM ballasts	69
220 V 60 Hz – OM ballasts	70
230 V 50 Hz – OM ballasts	71
240 V 50 Hz – OM ballasts	72
250 V 50 Hz – OM ballasts	74
<b>OG type HID ballasts</b>	75
220 V 50 Hz – OG ballasts	76
220 V 60 Hz – OG ballasts	77
230 V 50 Hz – OG ballasts	78
240 V 50 Hz – OG ballasts	79
250 V 50 Hz – OG ballasts	81
<b>HID lamp remote gear assemblies</b>	
OM PAK assemblies	82
Gear tray assemblies	84
D430 weatherproof assemblies	86
D96 weatherproof assemblies	88




## High-pressure mercury vapour (HM) lamps


The high-pressure mercury vapour (HM) lamps are used in a wide variety of applications.

Ambient temperature has little, if any, effect on the performance of these lamps as the temperature in the discharge tube is usually over 500°C. Most high-pressure mercury vapour lamps will strike and operate from -30°C on standard control equipment. Once struck, the upper ambient temperature limit is determined by the maximum allowable lamp cap and bulb temperatures.

High-pressure mercury vapour lamps require a cooling period of approximately 5-10 minutes before they will reignite. These lamps are not affected by short-term mains voltage variations. However, prolonged operation at other than normal wattage should be avoided if full lamp life is expected. Stroboscopic effects should be minimised by operating adjacent lamps on different phases or using lead / lag control equipment. Flicker factors for good quality lamps should be 3 % or less.

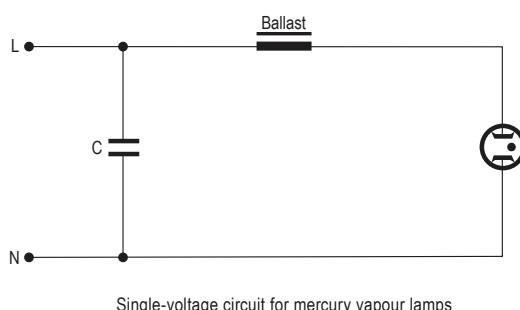

No ignitor is required for starting high-pressure mercury lamps. In order to achieve the performance values, 3 basic types of ballasts are offered and tapped versions which can be adjusted to various supply voltages are also available. With the aid of power tappings on the ballasts, e.g. OMB 125/80, and a power switch, high-pressure mercury vapour lamps can be step-dimmed to 50% of the standard output.

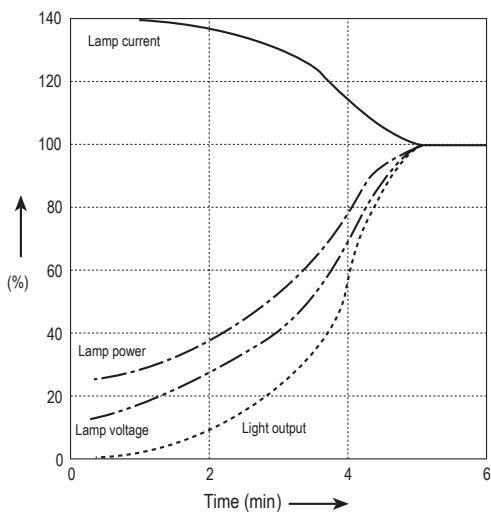

Unlike fluorescent lamps, mercury vapour lamps require several minutes to develop full light output as shown by these starting curves for a 400 W mercury vapour lamp

## Metal halide (HI) lamps


Metal halide (HI) lamps are similar in their construction to mercury vapour lamps. They are popular for their excellent colour rendering which is achieved by the inclusion of rare earth elements in the discharge tube.

Metal halide lamps are temperature sensitive and operate optimal at 100°C to 180°C ambient temperature and luminaires should be designed to provide suitable conditions. Ballasts must operate lamps from the correct supply voltage and their impedance should not vary more than  $\pm 3\%$  from the specified value. The supply voltage should not deviate for extended periods of more than 3% of the nominal rated voltage of the ballast and the supply frequency should not deviate by more than  $\pm 3\%$ .

Metal halide lamps require higher voltages for starting than the usual supply voltages. Various circuits are used to achieve the required starting conditions. They are leakage reactance ballasts, constant wattage auto-transformer control equipment or series reactor type ballasts with ignitor. The latter is the most economical solution.

Most metal halide lamps will require an ignitor to start the discharge in the arc. The ignition voltage is generally 4.0 - 5.0 kV peak for a cold start with the lamps requiring a cooling period of between 10-15 minutes before they will re-ignite. Certain lamps are capable of hot re-ignition in which cases voltages of up to 35kV peak are required. Some of the higher wattage 2,000 and 3,500W lamps can require hot instant re-strike voltages of up to 60kV peak.

Note: Not all makes and / or types of metal halide lamps can be operated on ignitor circuits – consult the lamp manufacturer or CMP for information or lamp control gear compatibility.

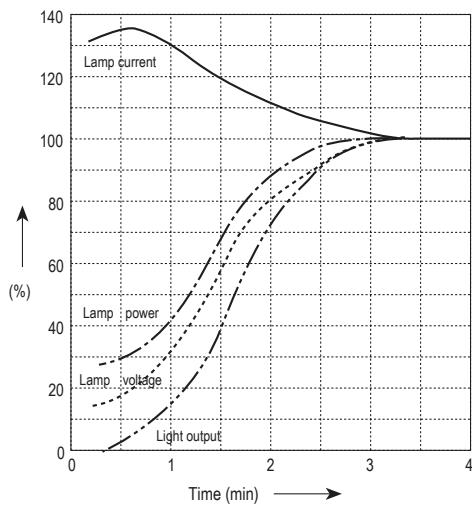


Similar to the mercury vapour lamps, metal halide lamps also require several minutes to develop full light output as is illustrated by the starting curves for a 400W metal halide lamp

## Control gear protection for compact metal halide lamps


The concentrated optics of short-arc metal halide lamps are ideal for compact luminaire designs, particularly in ratings of 20, 35, 70 and 150W. However, as some of these particular type of metal halide lamps age, they may become polarised. The polarisation superimposes a d.c. component on the a.c. lamp current. The combination of the a.c. and d.c. components results in a higher than normal current to flow (up to three times the nominal current) causing overheating of the control equipment.

Because of this characteristic, the IEC International Standards have published data on short-arc metal halide lamps which states: "Because of the possible risk of abnormal operating conditions that may occur at the end of lamp life which can lead to ballast overloading, suitable protected circuits shall be used for operation of this lamp."

Circuit protection can be provided in a number of ways. However, the most common is a self-resetting thermal cut-out against the ballast winding. This switches the circuit off when the temperature of the ballast increases beyond the maximum permissible winding temperature. Once the device cools down, the lamp will re-ignite and the circuit will continue to cycle. Bearing in mind that the polarisation tends to occur at the end of lamp life, replacement of the lamp at the end of rated life will ensure that the control equipment is not abnormally stressed, even though the circuit may be protected.

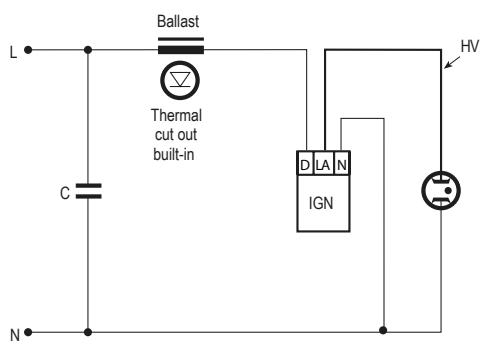

Single-voltage circuit with superimposed-pulse ignitor for short-arc metal halide lamps




Parallel pulse circuit for metal halide lamps up to 1 kV ignition voltage

## High pressure sodium (HS) lamps


High pressure sodium (HS) lamps can operate satisfactorily from -30°C to 100 °C on series reactor ballast circuits, but precautions against increase arc tube voltage, due to thermal back radiation when mounted in luminaires should be considered. Only a typical 10 volt increase in lamp voltage is tolerable.

Standard lamps will re-ignite after 60 to 90 seconds with an ignition voltage of 2.5 - 5.0 kV peak for cold start depending on the lamp specifications. High pressure sodium lamps can only be re-ignited hot if they are of linear double ended construction because hot re-strike requires 18 to 25kV peak starting pulses.


High pressure sodium lamps are most commonly used in a series reactor ballast and ignitor circuit. The lamp power and discharge tube temperature are highly dependent upon the lamp voltage. It is therefore important that the mains voltage does not exceed 105% of the nominal rated voltage of the ballast for extended periods. The ballast should exhibit a closely controlled current/ voltage characteristic to prevent the lamp from exceeding the maximum power limit as it ages and the lamp voltage rises.

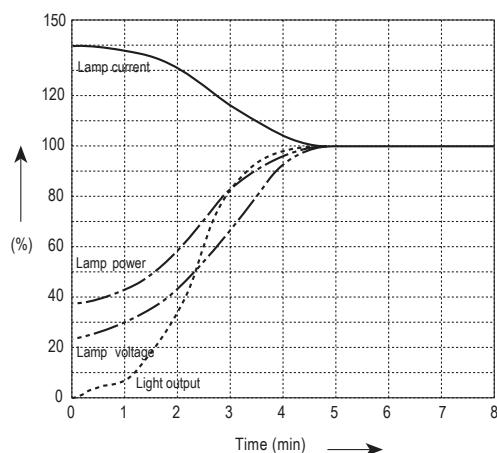

Run-up to full light output takes approximately 4 minutes from a cold start as is illustrated by the starting curves of a 400W high pressure sodium lamp



Single-voltage circuit with superimposed-pulse ignitor for sodium vapour lamps and metal halide lamps




Multi-voltage circuit with pulse ignitors for sodium vapour lamps and metal halide lamps


## Low pressure sodium ( LPS ) lamps

Low pressure sodium ( LPS ) lamps are the most efficient of the common HID lamps. However, their main drawback is the monochromatic light output at 590 nm ( yellow ). Low pressure sodium lamps require voltages from 390 to 670 V ( ballast open-


circuit voltage ) for ignition and are therefore operated on leakage reactance ballasts or on series reactor ballasts with an ignitor. The latter system is only suitable for lamp ratings up to 100W on 240V supply.

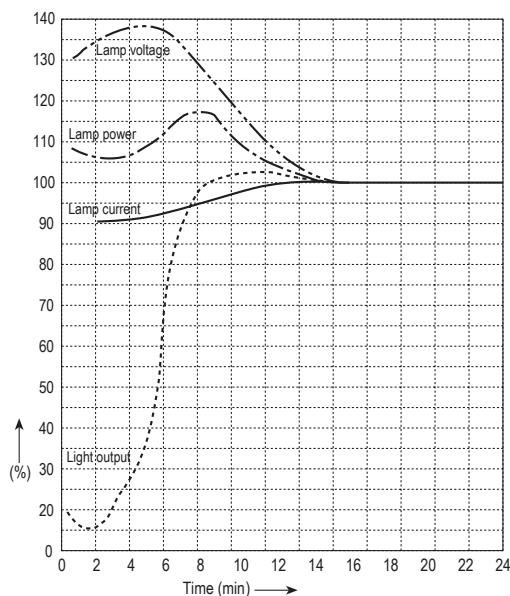

Typical starting curves for a 90W low pressure sodium lamp.  
These lamps re-strike immediately after a mains interruption.

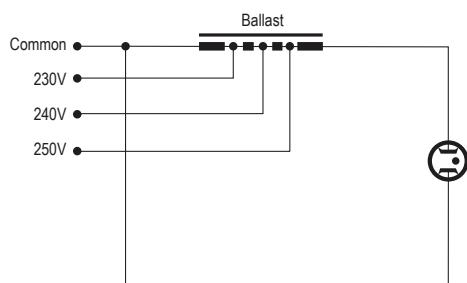

Leakage reactor ballast circuit for LPS lamps

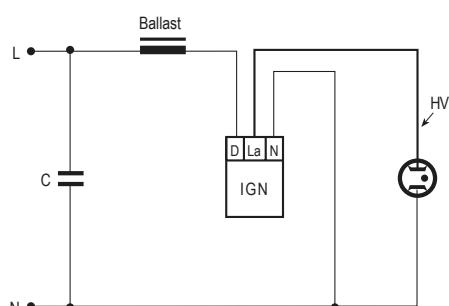

Superimposed-pulse ignitor circuit for LPS lamps

# Magnetic ballasts for HID lamps

Ballasts are required to operate high-intensity discharge lamps. Magnetic ballasts work on the self-inductance principle and limit lamp current and lamp wattage with a high level of efficiency. The impedance of the ballast is set to match the particular type of lamp, which ensures that the correct lamp performance is achieved.

In some cases, a ballast can be used for more than one lamp. Supply voltage and supply frequency influence ballast requirements and so the operating devices should be matched to the current supply voltage. It is possible to expand the scope of application by using ballasts with several voltage tappings.

## Optimum performance

Optimum performance is achieved by careful control of the main parameters. The tight tolerances used in manufacture ensure that the correct lamp current, the correct wattage and the expected luminous flux are achieved.

## Minimum consumption

An inefficient ballast means high losses and has a dramatic effect on the overall efficiency.

## Technical specific data

The hot losses specified in the technical data is an indicative figure, measured at 25 °C and at nominal lamp current according to IEC 61347-1. Furthermore, the circuit power is calculated by adding the nominal lamp power and the ballast losses.

## Minimum stray field

CMP ballasts are designed to keep the stray field to a minimum. This considerably reduces the noise generated near to magnetically sensitive parts as well as magnetic influences on sensitive parts.

## National and international test marks

CMP ballasts are approved by national and international test houses. Standard ballasts for the European market are all ENEC-approved without exception.


### Consistent high quality

Our Quality Assurance system, based on AS/NZS ISO 9001, guarantees consistent high quality. CMP's Quality Assurance department monitors all incoming materials, performs continuous production tests and 100% of our finished products are comprehensively tested.

### Maintenance-free long service life

CMP HID ballast windings are designed and constructed using Class H insulation materials, the tw130 (or in some OG models, tw150) rated winding ensuring maximum service life. In normal operation, in a 40 °C ambient temperature, probable service life of more than 50 years could be expected.

The graph shows the theoretical service life of a CMP HID ballast. Even when arduously operated at the maximum recommended temperature, more than 10 years service life can be expected. Every 10 °C over maximum winding temperature of 130°C (or 150°C) halves ballast life. The winding temperature is the ambient temperature plus  $\Delta t$ , the temperature rise, which is a function of ballast power consumption.

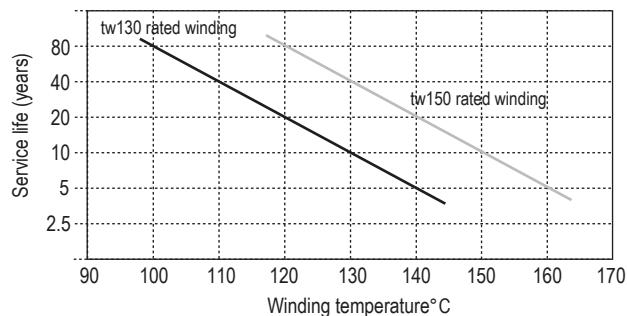

The manufacturing technique used by CMP is to vacuum impregnate the ballast with an unsaturated polyester resin. Typical characteristics are thermal class "H" (180 °C IEC 60085). Vacuum impregnation improves quality and longevity because the resin is drawn into the heart of the core and coil. This maximises heat transfer and also ensures silent operation.

Based on the concept of thermal conduction, vacuum impregnation eliminates air pockets within the ballast winding, maximising heat transfer. The surface temperature of a vacuum impregnated ballast may be higher than one which is simply dipped in resin. However, the winding temperature of a vacuum impregnated ballast will be correspondingly lower because of the insulation system's optimised ability to transfer the heat from the coil to the core, resulting in a longer service life in comparison. Reducing the ballast winding temperature by 10°C will effectively double its service life.


The high quality and reliability of insulated conductors is dependent not only on the production process, but also on the choice of raw materials. Many years of experience, both as a user and manufacturer of enamelled winding wire, has given CMP the knowledge and expertise to select the best raw materials from internationally approved suppliers.

The copper is made from a high conductivity hot rolled copper rod and complies with the chemical composition limits and resistivity requirements of International Registered Alloy Designation 110.


Critical attention is paid to the enamel as the material utilised to insulate the conductor. Choice of enamel is a key factor and is linked both to the enamelling system as well as the electrical, mechanical and technical characteristics of the finished product. The insulation enamels specified by CMP Controls are supplied by internationally approved manufacturers specialising within this field. Class H+ (200 °C) insulation is used in all CMP ballasts.

## Technical tips for HID reactor / ignitor circuits


Symptom	Possible fault	Test and remedy
Lamp intact but will not light	Failed lamp	Replace lamp
	Supply fault	Check supply volts and circuit fuse
	Wiring fault	Check for loose connections and correct connections to ignitor Check that insulation of cable between ballast or ignitor and lamp is sound Look for signs of breakdown due to ignitor high voltage pulses Check that cable length between ignitor and lamp are within limits specified
	Ignitor fault	Check with ignitor tester or remove ignitor and try another
	Ballast fault	Disconnect ignitor. Check for mains volts at ballast output terminal Try substitute ballast
	Low lamp power	Check supply voltage is correct Check correct compatible ballast is in use
	Failing lamp	Try another lamp
	Wiring	Check circuit is correctly wired, that all connections are tight and lamp is making contact in holder
Light output unstable or fluctuating	Unsuitable fitting	Check that fitting is recommended for the lamp, eg. high pressure sodium lamp voltage may rise and cause extinction
	Failing lamp	Replace lamp

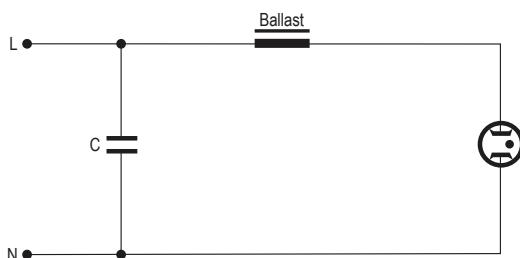


Single-voltage circuit for mercury vapour lamps

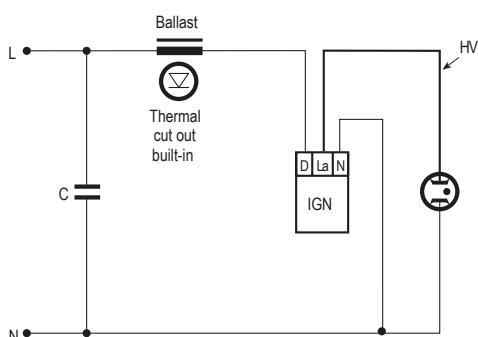


Single-voltage circuit with superimposed-pulse ignitor for short-arc metal halide lamps



Parallel pulse circuit for metal halide lamps up to 1 kV ignition voltage



Single-voltage circuit with superimposed-pulse ignitor for sodium vapour lamps and metal halide lamps



Multi-voltage circuit with pulse ignitors for sodium vapour lamps and metal halide lamps

## Remote assemblies for high-intensity discharge lamps

The OM PAK assemblies from CMP combine choke, ignitor, p.f. correction capacitor and terminals in a compact casing. These independent units in safety class 2 are very easy to install. No tools are needed at all, so they save an enormous amount of time on site.

All the assemblies for operating metal halide lamps or sodium lamps are generally temperature-protected and are suitable for mounting on normally flammable material ( fire category F ).

The robust design also means that the units can be used at high ambient temperatures ( ta ). The compact casing design results in exceptionally quiet operation.



The assemblies are available with or without prewired lamp cables. Screw terminals make it easy to connect to the mains. Quick fastening of the terminal covers and tool-less cable clamps add-up to efficient installation.



The ignitors used are an essential quality feature of the OM PAK series from CMP. There is a choice of two superimposed-pulse ignitors – the successful standard ZRM ES/C ignitor or the ZRM/CT ignitor with digital timer and pulse-pause operation.

With these different versions, CMP presents a rounded application-oriented range of OM PAK assemblies that ensure that high-intensity discharge lamps are operated in accordance with manufacturers' specifications.

## 50 W High-pressure mercury vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
GE	H 50 ...	E27	95	0.60	–	EMV50; OMB50	–
Iwasaki	HF50 PD	E27	95	0.61	–	EMV50; OMB50	–
Osram	HQL50	E27	95	0.62	–	EMV50; OMB50	–
Philips	HPL-N50 W	E27	95	0.61	–	EMV50; OMB50	–
Radium	HRL50	E27	95	0.62	–	EMV50; OMB50	–
Sylvania	HSL-BW50	E27	95	0.61	–	EMV50; OMB50	–

## 80 W High-pressure mercury vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
GENDX	H 80 ...	E27, B22	115	0.80	–	EMV80; OMB80	–
Iwasaki	HF 80 PD	E27	115	0.80	–	EMV80; OMB80	–
Osram	HQL 80	E27	115	0.80	–	EMV80; OMB80	–
Philips	HPL-N 80 W	E27	115	0.80	–	EMV80; OMB80	–
Radium	HRL 80	E27	115	0.80	–	EMV80; OMB80	–
Sylvania	HSL-BW 80	E27	115	0.80	–	EMV80; OMB80	–

## 125 W High-pressure mercury vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
GE	H 125 ...	E27, B22	125	1.15	–	EMV125; OMB125	–
Iwasaki	HF125 PD	E27, E40	125	1.15	–	EMV125; OMB125	–
Osram	HQL125	E27	125	1.15	–	EMV125; OMB125	–
Philips	HPL-N125 W	E27, E40	125	1.15	–	EMV125; OMB125	–
Radium	HRL125	E27	125	1.15	–	EMV125; OMB125	–
Sylvania	HSL-BW125	E40	125	1.15	–	EMV125; OMB125	–

## 175 W High-pressure mercury vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
Sylvania	H39KC-175/DX	E39	130	1.50	–	OMB175	–

## 250 W High-pressure mercury vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
GE	H 250 ...	E40	130	2.15	–	OMB 250; OGB250	–
Iwasaki	HF250 PD	E40	130	2.13	–	OMB 250; OGB250	–
Osram	HQL250	E40	130	2.15	–	OMB 250; OGB250	–
Philips	HPL-N250 W	E40	135	2.10	–	OMB 250; OGB250	–
Radium	HRL250	E40	130	2.15	–	OMB 250; OGB250	–
Sylvania	HSL-BW250	E40	130	2.15	–	OMB 250; OGB250	–

## 400 W High-pressure mercury vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
GE	H 400 ...	E40	135	3.25	–	OGB400	–
Iwasaki	HF 400 PD	E40	135	3.25	–	OGB400	–
Osram	HQL 400	E40	135	3.25	–	OGB400	–
Philips	HPL-N 400 W	E40	140	3.25	–	OGB400	–
Radium	HRL 400	E40	135	3.25	–	OGB400	–
Sylvania	HSL-BW 400	E40	135	3.25	–	OGB400	–

## 700 W High-pressure mercury vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
GE	H 700 ...	E40	140	5.50	–	OGB700	–
Iwasaki	HF 700 PD	E40	140	5.40	–	OGB700	–
Osram	HQL 700	E40	140	5.40	–	OGB700	–
Philips	HPL 700 W	E40	145	5.40	–	OGB700	–

## 1,000 W High-pressure mercury vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
GE	H 1000 ...	E40	145	7.50	–	OGB1000	–
Iwasaki	HF 1000 PD	E40	145	7.50	–	OGB1000	–
Osram	HQL 1000	E40	145	7.50	–	OGB1000	–
Philips	HPL-N 1000 W	E40	145	7.50	–	OGB1000	–
Radium	HRL 1000	E40	145	7.50	–	OGB1000	–
	HRLV 1000	E40	145	7.50	–	OGB1000	–
Sylvania	H34GW1000 /DX	E39	135	8.00	–	OGB1000	–
	H36GW1000 /DX	E39	265	4.00	–	OGB1000H	–
	HSL-BW 1000	E40	145	7.50	–	OGB1000	–

## 20 W Metal halide lamps

Lamps	Ignitors	Magnetic ballasts	Remote gear boxes				
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
GE	CMH 20 ...	G8.5	90	0.23	–	–	–
	CMH 20 MR16	GX10	90	0.21	–	–	–
	CMH 20 Super Mini	GU6.5	90	0.21	–	–	–
Osram	HCI-TC 20	G8.5	100	0.23	–	–	–
Philips	CDM-R111 20 W	GX8.5	101	0.22	–	–	–
	CDM-TM 20 W	PGJ5	100	0.22	–	–	–
Radium	RCC-PAR20 20 W...	E27	100	0.23	–	–	–
	RCC-TC 20 ...	G8.5	100	0.23	–	–	–
Sylvania	BritespotES50 20 W	GX10	100	0.22	–	–	–
	CMI-TC 20 W/SB	G8.5	100	0.20	–	–	–

## 35 W Metal halide lamps

Lamps	Ignitors	Magnetic ballasts	Remote gear boxes				
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
BLV	C-HIT35	G12	95	0.50	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
GE	CMH35 /PAR	E27	90	0.50	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	CMH35/T	G12, RX7s	90	0.50	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	CMH35/TC	G8.5	90	0.50	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
Osram	HCI-T35...	G12	90	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	HCI-TC35 W/WDL	G8.5	90	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
Philips	CDM-R35 W	E27	88	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	CDM-R111 35 W	GX8.5	88	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	CDM-T35 W	G12	88	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	CDM-TC35 W	G8.5	88	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
Radium	RCC-PAR3035 W...	E27	90	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	RCC-T35	G12	90	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	RCC-TC35 ...	G8.5	90	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
Sylvania	BritespotES11135 W	GX10	100	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	BritespotES50 35 W	GX10	95	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	BritespotESD5035 W	GX10	95	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	CMI-PAR20 35 W/SB	E27	90	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	CMI-PAR30 35 W/SB	E27	90	0.53	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	CMI-T35 W/SB	G12	90	0.50	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
	CMI-TC35 W/SB	G8.5	90	0.50	ZRM 2.5-ES/C; ZRM 2.5-ES/CT	OMS 35TH	OM PAK35 M
Venture	HIE35 /x/x	E27	95	0.53	ZRM 6-ES/C 3.5KV	EPS35; OMS 35	–
	MH 35 ...	E26	85	0.47	ZRM 6-ES/C 3.5KV	EPS35; OMS 35	–

## 50 W Metal halide lamps

Lamps	Ignitors	Magnetic ballasts	Remote gear boxes				
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
GE	MXR/MVR50	E26/27	85	0.68	ZRM 6-ES/C 3.5KV	EMV50; OMB 50	–
Venture	MH 50 ... (M110)	E26	85	0.68	ZRM 6-ES/C 3.5KV	EMV50; OMB 50	–

## 70 W Metal halide lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
BLV	C-HIT 70 DE	RX7s	95	1.00	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	C-HIT 70 WW	G12	95	1.00	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HIE ... 70 ...	E27	95	1.00	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HIE-P 70	E27	95	1.00	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HIT 70 DE	RX7s	95	1.00	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
GE	ARC 70...	G12, RX7s	90	0.98	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CMH 70 PAR	E27	90	0.98	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CMH 70 T...	G12	90	0.98	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CMH 70 T Mini	G8.5	90	0.98	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CMH 70 TD...	RX7s	90	0.98	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	MXR/MVR 70	E26/27	85	0.90	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS 70	OM PAK70 M
Iwasaki	MT 70 Color Arc	E27	90	1.00	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70ATH, OMS 70ATH	-
	MT 70 Color Arc	G12	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	MTD 70 Color Arc	RX7s	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
Osram	HCI-E/P 70 W/WDL	E27	90	0.98	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HCI-PAR30 70 W/WDL	E27	90	0.98	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HCI-T 70...	G12	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HCI-TC 70 W/WDL	G8.5	95	0.95	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HCI-TS 70...	RX7s	95	0.96	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HQI-E 70 W/WDL	E27	95	0.95	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HQI-T 70...	G12	95	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HQI-TS 70...	RX7s	95	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
Philips	CDM-ET 70 W	E27	90	1.00	ZRM 2-ES/C; ZRM 2-ES/CT	EPS 70ATH, OMS 70ATH	-
	CDM-R 70 W	E27	90	0.97	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CDM-R111 70 W	Gx8.5	83	0.98	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CDM-T 70 W	G12	88	0.98	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CDM-TC 70 W	G8.5	83	0.98	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CDM-TD 70 W	RX7s	92	0.97	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CDM-TT 70 W	E27	90	1.00	ZRM 2-ES/C; ZRM 2-ES/CT	EPS 70ATH, OMS 70ATH	-
	CDO-ET 70 W	E27	87	0.98	ZRM 2-ES/C; ZRM 2-ES/CT	EPS 70ATH, OMS 70ATH	-
	CDO-TT 70 W	E27	90	1.00	ZRM 2-ES/C; ZRM 2-ES/CT	EPS 70ATH, OMS 70ATH	-
	MHN-TD 70 W	RX7s	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
Radium	MHW-TD 70 W	RX7s	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HRI-E 70 W...	E27	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HRI-T 70...	G12	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HRI-TS 70...	RX7s	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	RCC-PAR3070 W...	E27	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	RCC-T 70	G12	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
Sylvania	RCC-TC 70 ...	G8.5	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	RCC-TS 70	RX7s	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	Britespot DE 70 ...	RX7s	95	0.98	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	Britespot ESD111 70 ...	GX10	100	0.98	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CMI-MCP70 W PAR38	E26	88	0.90	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS 70	OM PAK70 M
	CMI-MP 70 W/SB	E27	90	0.98	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CMI-PAR30 70 W/SB	E27	90	0.98	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CMI-T 70 W/SB	G12	100	0.98	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	CMI-TT 70 W/SB	E27	90	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HSI-MP 70 W	E27	95	1.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HSI-T 70 W	G12	95	0.95	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	HSI-TD 70 W	RX7s	90	0.98	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
Venture	MP 70 W PAR38	E26	85	0.90	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS 70	OM PAK70 M
	HIE 70/x/x	E27	85	0.90	ZRM 6-ES/C 3.5KV	OMS 70	-
	MH 70 / ... (M98)	E26	85	0.91	ZRM 6-ES/C 3.5KV	OMS 70	-
	MH-DE70 / ... (M85)	RX7s	95	0.95	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	EPS 70ATH, OMS 70ATH	OM PAK70 M
	MS 70 / ... (M98)	E26	85	0.91	ZRM 6-ES/C 3.5KV	OMS 70	-

## 100 W Metal halide lamps

Lamps				Ignitors		Magnetic ballasts		Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)				
BLV	HIE 100	E27	95	1.20	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
	MHR 100	plug	95	1.20	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
GE	CMH 100...	E27	100	1.15	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
	MXR 100	E27	95	1.20	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
Osram	HQI-E 100 W/WDL...	E27	95	1.10	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
	HQI-EP 100 W/WDL	E27	95	1.10	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
Philips	CDO-ET 100 W	E40	90	1.20	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
	CDO-TT 100 W	E40	95	1.20	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
Radium	HRI-E 100 W...	E27	90	1.20	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
	CMI-MCOPAR38 100 W/SB...	E26	100	1.10	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
Sylvania	CMI-MCOPAR38 100 W/SB...	E27	100	1.15	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
	CMI-MP 100 W/SB...	E27	100	1.00	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
Venture	HSI-MP 100 ...	E27	100	1.00	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
	MP PAR38 100 W...	E26	100	1.10	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
HIE 100/x/x	HIE 100/x/x	E27	100	1.10	ZRM 6-ES/C 3.5KV	OMH 100TH	-	
	HIE100 W/C/U/LU3K	E27	100	1.10	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMH 100TH	OM PAK 100 M	
	MH 100 /... (M90)	E26	100	1.10	ZRM 6-ES/C 3.5KV	OMH 100TH	-	
	MH-DE 100 (M90)	RX7s	100	1.10	ZRM 6-ES/C 3.5KV	OMH 100TH	-	
	MH-DE 100 (M90)	E26	100	1.10	ZRM 6-ES/C 3.5KV	OMH 100TH	-	

## 150 W Metal halide lamps

Lamps				Ignitors		Magnetic ballasts		Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)				
BLV	C-HIT150 DE	RX7s	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	C-HIT150 WW	G12	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HIE150	E27	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HIT150	E40	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HIT150 DE	RX7s	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	MHR150	plug	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
GE	ARC150...	G12; RX7s	105-110	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	CMH150	E27, G12, RX7s	95-105	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	MBI 150 /T	G12	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	MXR/MVR150	E26/27	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
Iwasaki	MT 150 CEH-W/BU	E27	95	1.90	ZRM 2-ES/C; ZRM 2-ES/CT	OMS150TH, OGS150TH	-	
	MT 150 ColorArc	E27	95	1.90	ZRM 2-ES/C; ZRM 2-ES/CT	OMS150TH, OGS150TH	-	
	MT 150 ColorArc	G12	95	1.90	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	MTD 150 ColorArc	RX7s	95	1.90	ZRM 2.5-ES/C; ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
Osram	HCI-E/P150 W/WDL	E27	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HCI-T150...	G12	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HCI-TS150...	RX7s 24	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HQI-E150...	E27	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HQI-R150...	plugg	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HQI-T150...	G12	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HQI-TS150...	RX7s 24	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HT150 W (DisplayOptics)	GY9.5	90	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
Philips	CDM-ET150 W	E40	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	CDM-SA/T150 W	G12	96	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	CDM-T 150 W	G12	96	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	CDM-TD150 W	RX7s	96	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	CDM-TT150 W	E40	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	CDO-ET150 W	E40	93	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	CDO-TT150 W	E40	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	MHN-TD150 W	RX7s	98	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
Radium	MHW-TD150 W	RX7s	96	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HRI-E150...	E27	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HRI-T150...	G12	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HRI-TS150...	RX7s	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	RCC-T150...	G12	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
Sylvania	BritespotDE 150...	RX7s	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	CMI-MCOPAR38 150 W	E26	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	CMI-MP 150 W	E27	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	CMI-T 150 W/SB	G12	100	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	CMI-TT150 W/SB	E40	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HSI-MP150 W	E27	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HSI-T150 W...	G12	95	1.82	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HSI-TD150 W...	RX7s	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	MP PAR38 150 W	E26	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	HIE150/x/x	E27, RX7s	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
Venture	HIT150 W/U/LU/T38/4K	E27	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	MH 150 /... /LV	E26	95	1.80	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMS150TH, OGS150TH	OM PAK 150 M	
	MH 150 /... (M102)	E26	95	1.80	ZRM 6-ES/C 3.5KV	OMS150TH, OGS150TH	-	

## 175 W Metal halide lamps

Lamps				Ignitors		Magnetic ballasts		Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)				
GE	MVR/MXR175 /E	E26/E27	135	1.40	–	CWMH175	–	
Iwasaki	M 175 X/U	E40	130	1.50	ATIG-14	OMB 175	–	
Osram	MI 175 /C/U	E40	130	1.50	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OMB175	–	
Sylvania	M 175	E27, E39	132	1.50	–	CWMH175	–	
	MP 175 ...BU	EX39	132	1.50	–	CWMH175	–	
	MS 175 ...HOR	E39POM	132	1.50	–	CWMH175	–	
	MS 175 ...PS	E39	132	1.50	ZRM 6-ES/C 3.5kV	OMB 175	–	
Venture	MH 175 /... (M57)	E39	130	1.50	–	CWMH175	–	
	MH 175 /MED	E26	130	1.50	ATIG-14	OMB 175	–	
					–	CWMH175	–	
					ATIG-14	OMB 175	–	

## 200 W Metal halide lamps

Lamps				Ignitors		Magnetic ballasts		Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)				
Venture	MP 200 /V.../PS	E39	132	1.60	ZRM 6-ES/C 3.5kV	OMH 200	–	
	MS 200 /.../PS	E39	132	1.60	ZRM 6-ES/C 3.5kV	OMH 200	–	

## 250 W Metal halide lamps

Lamps				Ignitors		Magnetic ballasts		Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)				
BLV	HIT250...	E40, Fc2	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OGS250TH	–	
GE	ARC250...	E40, Fc2	110	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	–	
	CMH250 ...	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	–	
	MVR250	E40	133	2.10	–	CWMH250	–	
					ATIG-14	OMB 250, OGB250	–	
Iwasaki	MF 250 LSH	E40	130	2.13	–	OMB 250, OGB250	–	
	MF 250 X/U	E40	130	2.13	–	CWMH250	–	
					ATIG-14	OMB 250, OGB250	–	
	MT 250	E40	130	2.13	–	OMB 250, OGB250	–	
	MT 250 -BH	E40	130	2.13	–	CWMH250	–	
					ATIG-14	OMB 250, OGB250	–	
	MT 250 Colorarc	E40	130	2.13	–	OMB 250, OGB250	–	
	MT 250 LSH	E40	130	2.13	–	OMB 250, OGB250	–	
Osram	HCI-E250 W/...	E40	95	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OGS250TH	–	
	HQI-E250 /D	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OGS250TH	–	
	HQI-E250 W/N/SI	E40	133	2.15	ATIG-14	OMB 250, OGB250	–	
	HQI-R250 W/N/DL		100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OGS250TH	–	
	HQI-T250 /D	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OGS250TH	–	
	HQI-T250 W/N/SI	E40	133	2.15	ATIG-14	OMB 250, OGB250	–	
	HQI-TS250 W/...	Fc2	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OGS250TH	–	
Philips	CDM-T250 W	G12	93	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OGS250TH	–	
	CDM-TT250 W	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	–	
	HPIplus 250 W ++	E40	128	2.15	ATIG-14	OMB 250, OGB250	–	
	HPI-T250 W ++	E40	128	2.15	ATIG-14	OMB 250, OGB250	–	
	HPI-Tplus 250 W ++	E40	128	2.15	ATIG-14	OMB 250, OGB250	–	
	MH 250 W	E40	133	2.10	ATIG-14	OMB 250, OGB250	–	
	MHN-TD250 W	Fc2	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	–	
Radium	HRI-E250 W/D	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OGS250TH	–	
	HRI-E250 W/NSI	E40	130	2.10	ATIG-14	OMB 250, OGB250	–	
	HRI-T250 W/D	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OGS250TH	–	
	HRI-TS250 ...	Fc2	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C	OGS250TH	–	
	RCC-T250 W/D	E40	100	3.00	ZRM 2.5-ES/CT, ZRM 4.5-ES/CT	OGS250TH	–	
	RCC-TS250 ...	Fc2	100	3.00	ZRM 2.5-ES/CT, ZRM 4.5-ES/CT	OGS250TH	–	

+ ballast with ignitor tap required    ++ can also be operated with HPSgear

## 250 W Metal halide lamps

Lamps				Ignitors		Magnetic ballasts	Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
Sylvania	CMI-TT250 W/G22/SB	G22	95	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	CMI-TT250 W/SB	E40	105	2.90	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	HSI-HX250 ...	E40	130	2.10	ATIG-14	OMB 250, OGB250	-
	HSI-SX250 /P...	E40	100	2.90	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	HSI-T250 /6K...	E40	98	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	HSI-TD250 ...	Fc2	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	HSI-THX250 ...	E40	130	2.10	ATIG-14	OMB 250, OGB250	-
	HSI-TSX250 ...	E40	100	2.90	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	M 250 ...U	E39	133	2.10	- ATIG-14	CWMH250 OMB 250, OGB250	-
	MP 250 ...BU	EX39	133	2.10	-	CWMH250	-
	MP 250 ...PS	EX39	133	2.10	ZRM 6-ES/C 3.5kV	OMB 250, OGB250	-
	MS 250 ...HOR	E39POM	133	2.10	- ZRM 6-ES/C 3.5kV	CWMH250 OMB 250, OGB250	-
	MS 250 ...PS	E39	133	2.10	ZRM 6-ES/C 3.5kV	OMB 250, OGB250	-
Venture	HIE250 /LU/x	E40	95	3.10	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	HIE250 /x/x/EURO/x	E40	133	2.10	ATIG-14	OMB 250, OFB250, OGB250	-
	MH 250 /... (M58)	E39	133	2.10	- ATIG-14	CWMH250 OMB 250, OFB250, OGB250	-
	MH-DE250 (M80)	Fc2	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OFB250, OGS250	-
	MP 250 /V/.../PS	E39	133	2.10	ZRM 6-ES/C 3.5kV	OMB 250, OGB250	-
	MS 250 /... (M58)	E39	133	2.10	- ATIG-14	CWMH250 OMB 250, OGB250	-
	MS 250 /.../PS	E39	133	2.10	ZRM 6-ES/C 3.5kV	OMB 250, OGB250	-

+ ballast with ignitor tap required

## 320 W Metal halide lamps

Lamps				Ignitors		Magnetic ballasts	Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
Sylvania	MP 320/350 ...PS	EX39	132	2.60	ZRM 6-ES/C 3.5kV	OGH320	-
	MS 320 ...PS	E39	135	2.63	ZRM 6-ES/C 3.5kV	OGH320	-
Venture	MP 320 /V/.../PS	E39	135	2.63	ZRM 6-ES/C 3.5kV	OGH320	-
	MS 320 /.../PS	E39	135	2.63	ZRM 6-ES/C 3.5kV	OGH320	-

## 350 W Metal halide lamps

Lamps				Ignitors		Magnetic ballasts	Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
Sylvania	MP 320/350 ...PS	EX39	135	2.90	ZRM 6-ES/C 3.5kV	OGH350	-
	MP 350/400 ...PS	EX39	135	2.90	ZRM 6-ES/C 3.5kV	OGH350	-
Venture	MP 350 /V/.../PS	E39	135	2.80	ZRM 6-ES/C 3.5kV	OGH350	-
	MS 350 /.../PS	E39	135	2.80	ZRM 6-ES/C 3.5kV	OGH350	-

## 400 W Metal halide lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
BLV	HIT 400...	E40	100	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C	OGS400TH	-
GE	ARC 400/D	E40	120	4.35	ZRM 4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	CMH 400 /...E	E40	125	4.20	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	KRC400...	E40	130	3.50	ZRM 4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C	OGB400, OGH400	-
	MVR 400 /...E	E40	135	3.20	-	CWMH 400	-
					ATIG-14	OGB400	-
Iwasaki	MF 400 /BUH	E40	135	3.25	ATIG-14	OGB400	-
	MF 400 LSH/U	E40	135	3.25	-	OGB400	-
	MF 400 SX	E40	135	3.25	ATIG-14	OGB400	-
	MF 400 X/U	E40	135	3.25	ATIG-14	OGB400	-
	MT 400 /BH	E40	135	3.25	ATIG-14	OGB400	-
	MT 400 LSH	E40	135	3.25	-	OGB400	-
Osram	HQI-BT400 W/D HPSGear	E40	120	4.00	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C	OGS400TH	-
	HQI-E 400 W/N/SI	E40	135	3.25	ATIG-14	OGB400	-
	HQI-E400 W/... HPSGear	E40	120	4.00	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C	OGS400TH	-
	HQI-T 400 W/N/SI	E40	135	3.25	ATIG-14	OGB400	-
	HQI-T400 W/N HPSGear	E40	120	4.00	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C	OGS400TH	-
	HQI-TS 400 W/...	Fc2	120	4.10	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C	OGS400TH	-
	MI 400 /.../U	E40	135	3.25	ATIG-14	OGB400	-
Philips	CDM-TT 400 W	E40	95	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	HPI 400 W	E40	125	3.40	ATIG-14	OGB400, OGH400	-
	HPIplus 400 W ++	E40	125	3.40	ATIG-14	OGB400, OGH400	-
	HPIplus 400 W BUS++	E40	125	3.40	-	OGB400, OGH400	-
	HPI-T 400 W	E40	125	3.40	ATIG-14	OGB400, OGH400	-
	HPI-Tplus 400 W ++	E40	125	3.40	ATIG-14	OGB400, OGH400	-
	MH 400 W	E40	135	3.25	ATIG-14	OGB400	-
Radium	HRI-BT 400 ...	E40	100	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C	OGS400TH	-
	HRI-E 400 ...	E40	100	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C	OGS400TH	-
	HRI-E 400 W/NSI	E40	135	3.25	ATIG-14	OGB400	-
	HRI-TS 400 ...	Fc2	100	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C	OGS400TH	-
Sylvania	HSI-HX 400	E40	130	3.40	ATIG-14	OGB400, OGH400	-
	HSI-HX 400 /CO/I	E40	130	3.40	-	OGB400, OGH400	-
	HSI-SX 400 /P...	E40	120	4.40	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	HSI-T400 /6K...	E40	122	4.40	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C	OGS400	-
	HSI-THX 400	E40	130	3.25	ATIG-14	OGB400	-
	HSI-TSX 400 ...	E40	105	4.40	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	M 400 ...	E39	135	3.25	-	CWMH 400	-
					ATIG-14	OGB400	-
	M 400 ...BT28	E39	135	3.25	-	CWMH 400	-
					ATIG-14	OGB400	-
	MP 350/400 ...PS	EX39	135	3.25	ZRM6-ES/C 3.5kV	OGB400	-
	MP 400 ...	EX39	135	3.25	-	CWMH 400	-
					ZRM6-ES/C 3.5kV	OGB400	-
	MS 400 ...	E39POM	135	3.25	-	CWMH 400	-
					ZRM6-ES/C 3.5kV	OGB400	-
Venture	HIE 400 / LU	E40	120	4.00	ZRM4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	HIE 400 /x/x	E40	135	3.20	ZRM 4.5-ES/C, ZRM4.5-ES/CT, ZRM6-ES/C	OGB400	-
	HIE 400 W/x/EURO/x	E40	135	3.25	ATIG-14	OGB400	-
	MH 400 /... (M59)	E39	135	3.20	ATIG-14	OGB400	-
	MP 400 /V/.../PS	E39	135	3.20	ZRM 6-ES/C 3.5kV	OGB400	-
	MS 400 /.../PS	E39	135	3.20	ZRM 6-ES/C 3.5kV	OGB400	-
	MS 400 /... (M59)	E39	135	3.20	ATIG-14	OGB400	-

+ ballast with ignitor tap required

++ can also be operated with HPSgear

## 450 W Metal halide lamps

Lamps					Ignitors	Magnetic ballasts	Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
Venture	MP 450 /V.../PS	E39	135	3.70	ZRM6-ES/C 3.5kV	OGH450	–
	MS 450 /.../PS	E39	135	3.70	ZRM6-ES/C 3.5kV	OGH450	–

## 1,000 W Metal halide lamps

Lamps					Ignitors	Magnetic ballasts	Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
BLV	HIT 1000	E40	120	9.50	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGH1000A	–
GE	MVR 1000	E40	250	4.30	–	CWMH 1000	–
	SPL 1000	RX7sM	270	4.20	ZRM 12-ES/C 400	OGH1000H	–
	SPL 1000	E40	130	9.50	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGH1000A	–
Iwasaki	MF 1000 B SX	E40	230	4.70	–	CWMH 1000	–
	MF 1000 B X/U	E40	263	4.10	–	CWMH 1000	–
	MT 1000 ...	E40	130	8.25	ZRM 12-ES/C, ZRM 12-ES/CT	OGH1000	–
	MT 1000 A-BH/67	E40	145	7.50	ATIG-14	OGB1000	–
	MT 1000 B	E40	230	4.70	–	CWMH 1000	–
	MT 1000 B-BH	E40	230	4.70	ZRM 1200/400 A001	OGH1000H	–
Osram	HQI-E 1000 ...	E40	130	9.50	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGH1000A	–
	HQI-T 1000 ...	E40	130	9.50	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGH1000A	–
	HQI-TS 1000 W/D/S	cable	120	9.60	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGH1000A	–
	HQI-TS 1000 W/NDL/S	cable	120	9.60	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGH1000A	–
Philips	HPI-T 1000 W	E40	130	8.25	ATIG-14	OGH1000	–
	MHN-LA 1000 W	cable	125	9.30	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGH1000A	–
Radium	HRI-T 1000 ...	E40	130	9.50	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGH1000A	–
	HRI-TS 1000 /D	Fc2	130	9.50	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGH1000A	–
	HRI-TS 1000 W/D/S	cable	130	9.50	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGH1000A	–
Sylvania	HSI-T1000 W/4K	E40	130	8.25	ATIG-14	OGH1000	–
	M 1000 ...	E39	263	4.10	–	CWMH 1000	–
	M 1000 ...BT37	E39	263	4.10	–	CWMH 1000	–
	MP 1000 ...	EX39	263	4.10	–	CWMH 1000	–
	MS 1000 ...	E39	263	4.10	–	CWMH 1000	–
Venture	MH 1000	E39	263	4.30	–	CWMH 1000	–

+ ballast with ignitor tap required

## 1,500 W Metal halide lamps

Lamps					Ignitors	Magnetic ballasts	Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
GE	MVR1500	E40	270	6.00	–	CWMH1500	–
	SPL1500 /L/H	RX7sM	250	6.80	ZRM 12-ES/C 400	OGH1500	–
Sylvania	M 1500 ...	E39	268	6.20	–	CWMH1500	–
	M 1500 T7/DE	RSC	500	3.30	–	CWBL1500	–
	M 1500 T8/DE	CER/SP	265	6.30	–	CWMH1500	–
Venture	MBILS1500	RSC (RX7s)	250	6.70	ZRM 12-ES/C 400	OGH1500	–
	MH 1500 /	E39	268	6.20	–	CWMH1500	–

## 1,800 W Metal halide lamps

Lamps					Ignitors	Magnetic ballasts	Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
Philips	MHN-SA1800 W/230V	X830R, (P)SFC	120	17.30	ZRM 20-ES/B	MHD 1800	–
	MHN-SA 1800 W/400V	(P)SFC	205	10.50	ZRM 12-ES/C 400	MHD 1800H	–

## 2,000 W Metal halide lamps

Lamps					Ignitors	Magnetic ballasts	Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
GE	SPL 2000 /L	special	250	10.30	ZRM 12-ES/C 400	HQI 2000/D	–
	SPL 2000 /T	E40	250	10.30	ZRM 1200/400 A001	HQI 2000/D	–
	SPL 2000 /T/HR	E40	250	10.30	ZRM 12-ES/C 400	HQI 2000/D	–
	SPL 2000 /T/I	E40	250	10.30	–	HQI 2000/D	–
Iwasaki	MT 2000 B-BH-L	E40	230	9.20	ZRM 1200/400 A001	HQI 2000	–
	MT 2000 B-BH-L/T	E40	230	9.20	–	HQI 2000	–
Osram	HQI-T 2000 /D	E40	230	10.30	ZRM 12-ES/C 400	HQI 2000/D	–
	HQI-T 2000 /D/I	E40	230	10.30	–	HQI 2000/D	–
	HQI-T 2000 /N	E40	245	8.80	–	HQI 2000	–
	HQI-T2000 /N/230 V	E40	120	16.50	ATIG-14	HQI2000L, 2 x OGH1000	–
	HQI-T 2000 /N/E/SUPER	E40	220	8.80	ZRM 12-ES/C 400, ZRM 4000/400 powerPULSE+	HQI 2000	–
	HQI-T 2000 /N/SN/SUPER	E40	220	8.80	ZRM 1200/400 A001	HQI 2000	–
	HQI-TS 2000 /D	cable	205	11.30/10.30	ZRM 12-ES/C 400	HQI 2000/D	–
	HQI-TS 2000 /DS	cable	205	11.30/10.30	ZRM 12-ES/C 400	HQI 2000/D	–
	HPI-T 2000 W/220V	E40	130	16.50	ZRM 20-ES/B	HQI2000L, 2 x OGH1000	–
	HPI-T2000 W/380V	E40	240	8.80	ZRM 12-ES/C 400, ZRM 4000/400 powerPULSE+	HQI 2000	–
Philips	MHN-LA 2000 W/400V	cable	225/235	10.30/9.60	ZRM 12-ES/C 400	HQI 2000/D	–
	MHN-SA 2000 W/400V	X830R	205	11.30	ZRM 12-ES/C 400	HQI 2000/D	–
	MHN-TD 2000 W	cable	235	9.60	ZRM 12-ES/C 400	HQI 2000/D	–
	MHT-TD 2000 W	cable	225	10.30	ZRM 12-ES/C 400	HQI 2000/D	–
	HRI-T 2000 /D	E40	230	10.30	ZRM 12-ES/C 400	HQI 2000/D	–
	HRI-T 2000 /D/I	E40	230	10.30	–	HQI 2000/D	–
	HRI-T2000 /N/230V	E40	130	16.50	ATIG-14	HQI2000L, 2 x OGH1000	–
	HRI-T 2000 /N/I	E40	245	8.80	–	HQI 2000	–
Radium	HRI-T 2000 /NSC/400	E40	245	8.80	ZRM 12-ES/C 400, ZRM 4000/400 powerPULSE+	HQI 2000	–
	HRI-TS 2000 /D	E40	205	10.30	ZRM 12-ES/C 400	HQI 2000/D	–
	HRI-TS 2000 /DS	cable	205	11.30	ZRM 12-ES/C 400	HQI 2000/D	–
	HRI-TS 2000 /NDL/S	cable	205	11.30	ZRM 12-ES/C 400	HQI 2000/D	–
	HSI-T 2000 W/S	E40	235	9.00	ZRM 1200/400 A001	HQI 2000	–
	HSI-T 2000 WS/I	E40	235	9.00	–	HQI 2000	–
Sylvania	HSI-TD 2000 W/D	cable	205	11.30	ZRM 12-ES/C 400	HQI 2000/D	–
	M 2000 T8/DE	RSC	250	8.50	ZRM 12-ES/C 400	CWBL 2000	–
	M 2000 T9/DE	CER/SP	250	8.50	ZRM 12-ES/C 400	CWBL 2000	–
	M 2000 T10/DE	CER/SP	220	10.70	ZRM 12-ES/C 400	HQI 2000/D	–
	Venture	MBILS 2000	special	230	10.30	ZRM 12-ES/C 400	HQI 2000/D

+ ballast with ignitor tap required

## 3,500 W Metal halide lamps

Lamps					Ignitors	Magnetic ballasts	Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)			
Osram	HQI-T3500 W/D	E40	220	18.00	ZRM 20-ES/B 400	HQI3500	–
Radium	HRI-T3500 /D	E40	220	18.00	ZRM 20-ES/B 400	HQI3500	–
	HRI-TS3500 /D	E40	220	18.00	ZRM 20-ES/B 400	HQI3500	–

## 35 W High pressure sodium vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
Philips	SDW-T35 W	PG12-1	96	0.48	Philips CSLS35	EPS35, OMS35	-
Sylvania	SHP-S35 ...	E27	90	0.49	ZRM 2-ES/C, ZRM 2-ES/CT	EPS35, OMS35	-
	SHP-TS35 W	E27	90	0.49	ZRM 2-ES/C, ZRM 2-ES/CT	EPS35, OMS35	-

## 50 W High pressure sodium vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
GE	LU 50/90	E27	85	0.76	ZRM 2-ES/C, ZRM 2-ES/CT	EPS50, OMS50	-
	LU 50/90...I	E27	85	0.76	-	EPS50, OMS50	-
Iwasaki	NH 50 .../HV/...	E27	85	0.76	ZRM 2-ES/C, ZRM 2-ES/CT	EPS50, OMS50	-
	NH 50 F/HV/II	E27	85	0.76	-	EPS50, OMS50	-
	NHT50 /I	E27	85	0.76	-	EPS50, OMS50	-
Osram	NAVE 50	E27	85	0.76	ZRM 2-ES/C, ZRM 2-ES/CT	EPS50, OMS50	-
	NAVE 50 I	E27	85	0.76	-	EPS50, OMS50	-
	NAVT 50 SUPER 4Y	E27	90	0.80	ZRM 2-ES/C, ZRM 2-ES/CT	EPS50, OMS50	-
Philips	SDW-T50 W	PG12-1	92	0.76	Philips CSLS50	EPS50, OMS50	-
	SON50 W-E	E27	90	0.76	ZRM 2-ES/C, ZRM 2-ES/CT	EPS50, OMS50	-
	SON50 W-I	E27	90	0.76	-	EPS50, OMS50	-
	SON-T ... 50 W	E27	88	0.75	ZRM 2-ES/C, ZRM 2-ES/CT	EPS50, OMS50	-
Radium	RNP-E50 W	E27	85	0.76	ZRM 2-ES/C, ZRM 2-ES/CT	EPS50, OMS50	-
	RNP-E50 W/I	E27	85	0.76	-	EPS50, OMS50	-
Sylvania	SHP50 W... I	E27	85	0.76	-	EPS50, OMS50	-
	SHP-S50 W...	E27	85	0.76	ZRM 2-ES/C, ZRM 2-ES/CT	EPS50, OMS50	-
	SHP-TS50 W	E27	85	0.76	ZRM2-ES/C; ZRM2-ES/CT	EPS50, OMS50	-

## 70 W High pressure sodium vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
BLV	NAH-E 70	E27	90	1.00	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	NAH-TR 70	RX7s	90	1.00	ZRM2.5-ES/C, ZRM2.5-ES/CT,ZRM4.5-ES/C	EPS 70A, OMS 70A	OM PAK70 M
GE	LU 70 /90...	E27	85	0.98	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	LU 70 /90...I	E27	85	0.98	-	EPS 70A, OMS 70A	-
Iwasaki	NH 70 /HV/... 70 S	E27	90	0.98	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	NH 70 F/HV/II	E27	90	0.98	-	EPS 70A, OMS 70A	-
	NHT 70	E27	90	0.98	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	NHT 70 /I	E27	90	0.98	-	EPS 70A, OMS 70A	-
Osram	NAV E 70 ...	E27	90	0.98	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	NAV E 70 I	E27	90	0.98	-	EPS 70A, OMS 70A	-
	NAV T 70 ...	E27	90	0.98	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	NAV TS 70 SUPER 4Y	RX7s	85	0.98	ZRM2.5-ES/C, ZRM2.5-ES/CT,ZRM4.5-ES/C	EPS 70A, OMS 70A	OM PAK70 M
Philips	SON 70 W...	E27	90	0.98	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	SON 70 W-E	E27	90	0.98	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	SON 70 W-I	E27	90	0.98	-	EPS 70A, OMS 70A	-
	SON Hg free 70 W...	E27	90	0.98	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	SON-T 70 W...	E27	90	0.98	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	SON Hg free 70 W...	E27	90	0.98	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	SON-T plus 70 W...	E27	90	1.00	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
Radium	RNP-E 70 W	E27	90	1.00	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	RNP-E 70 W/I	E27	90	1.00	-	EPS 70A, OMS 70A	-
	RNP-T 70 W	E27	90	1.00	ZRM2-ES/C; ZRM2-ES/CT	EPS 70A, OMS 70A	-
	RNP-TS 70 W	RX7s	90	1.00	ZRM2.5-ES/C, ZRM2.5-ES/CT,ZRM4.5-ES/C	EPS 70A, OMS 70A	OM PAK70 M
Sylvania	SHP 70 W/CO-E	E27	90	0.98	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	SHP 70 W...	E27	90	1.00	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-
	SHP 70 W... I	E27	90	1.00	-	EPS 70A, OMS 70A	-
	SHP-S 70 W...	E27	90	1.00	ZRM2-ES/C; ZRM2-ES/CT	EPS 70A, OMS 70A	-
	SHP-T 70 W...	E27	90	1.00	ZRM2-ES/C; ZRM2-ES/CT	EPS 70A, OMS 70A	-
	SHP-TD 70 W...	E27	90	1.00	ZRM2-ES/C; ZRM2-ES/CT	EPS 70A, OMS 70A	-
	SHP-TS 70 W...	E27	90	1.00	ZRM 2-ES/C, ZRM 2-ES/CT	EPS 70A, OMS 70A	-

## 100 W High pressure sodium vapour lamps

Lamps				Ignitors		Magnetic ballasts		Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)				
GE	LU 100 ...	E40	100	1.20	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS 100	OM PAK100 M	
	TCF 100	E40	100	1.20	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS 100	OM PAK100 M	
Iwasaki	NH 100 F	E40	100	1.20	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS 100	OM PAK100 M	
	NH 100 F/HV/I	E40	100	1.20	-	OMS 100	-	
	NHT 100	E40	100	1.20	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS 100	OM PAK100 M	
Osram	NAV E 100 SUPER 4Y	E40	100	1.20	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS 100	OM PAK100 M	
	NAV T 100 SUPER 4Y	E40	100	1.20	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS 100	OM PAK100 M	
	SDW-T 100 W	PG12-1	98	1.31	Philips CSLS 100	OMS 100A	-	
Philips	SON plus 100 W	E40	100	1.20	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS 100	OM PAK100 M	
	SON ... 100 W	E40	100	1.20	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS 100	OM PAK100 M	

## 150 W High pressure sodium vapour lamps

Lamps				Ignitors		Magnetic ballasts		Remote gear boxes
manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)				
BLV	HST-DE150	Fc2, RX7s	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	NAH-T150	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
GE	LU 150 /100 (S56)	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	TCF150	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
Iwasaki	NH 150 / I	E40	100	1.80	-	OMS150, OGS150	-	
	NH 150 ...	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	NH 150 F/HV/I	E40	100	1.80	-	OMS150, OGS150	-	
	NHT150 ...	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
Osram	NAVE 150 ...	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	NAVT 150 ...	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	NAVTS 150 ...	RX7s	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
Philips	SONComfort 150 W	E40	105	1.82	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SONHg free 150 W	E40	98	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SONplus 150 W	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SON150 W	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SON-E150 W	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SON-TComfort 150 W	E40	105	1.82	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SON-TH free 150 W	E40	98	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SON-Tplus 150 W	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SON-T150 W	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
Radium	RNP-E150 ...	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	RNT-T150 ...	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	RNT-TS150 ...	RX7s	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
Sylvania	LU 150 ... (100V)	E39	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SHP-S150 W...	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SHP-T150 W...	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SHP-TD150 W...	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
	SHP-TS150 W...	E40	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	
Venture	LU 150 /100 (S56)	Mogul	100	1.80	ZRM2.5-ES/C, ZRM2.5-ES/CT, ZRM4.5-ES/C	OMS150, OGS150	OM PAK150 M	

## 250 W High pressure sodium vapour lamps

Lamps manufacturer	description	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes	
BLV	HST-DE250	Fc2, RX7s	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	NAH-T250	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
GE	LU250 .../40 (S50)	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	LU250 /TD	RX7s	100	2.95	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
Iwasaki	NH250 ...	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	NH250 F/I	E40	100	3.00	-	OGS250	-
	NHT250 /I	E40	100	3.00	-	OGS250	-
	NHT250 ...	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
Osram	NAVE250 ...	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	NAVT250 ...	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	NAVTS250	Fc2	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
Philips	SON... 250 W	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	SON-T... 250 W	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
Radium	RNP-E250 ...	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	RNP-T250	E40	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
Sylvania	LU250 ... (S50)	E39	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	SHP250 W...	E40	100	2.95	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	SHP-S250 W...	E40	100	2.95	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	SHP-T250 W...	E40	100	2.95	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	SHP-TS250 W...	E40	100	2.95	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
Venture	LU250 (S50)	Mogul	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-
	LU250 /T7/ (S50)	RSC	100	3.00	ZRM 2.5-ES/C, ZRM 2.5-ES/CT, ZRM 4.5-ES/C, ZRM 4000 powerPULSE+	OGS250	-

+ ballast with ignitor tap required

## 400 W High pressure sodium vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
BLV	HST-DE 400	Fc2, RX7s	100	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	NAH-T 400	E40	100	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
GE	LU 400 .../TD	RX7s	100	4.40	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	LU 400...	E40	100	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
Iwasaki	NH 400 ...	E40	105	4.45	ZRM 4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	NH 400 F/I	E40	105	4.45	-	OGS400	-
	NHT 400 /I	E40	100	4.60	-	OGS400	-
	NHT 400 ...	E40	100	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
Osram	NAV E 400 ...	E40	105	4.40	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	NAV T 400 ...	E40	105	4.40	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	NAV TS 400 ...	Fc2	105	4.40	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
Philips	SON... 400 W	E40	105	4.45	ZRM 4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	SON-T... 400 W	E40	100	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	SON-T-AGRO	E40	116	4.13	ZRM 4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
Radium	RNP-E 400 W	E40	100	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	RNP-T 400 W	E40	100	4.60	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
Sylvania	LU 400 ... (S51)	E39	100	4.70	ZRM 6-ES/C, ZRM 6-ES/CT, ZRM 4000 powerPULSE+	OGS400	-
	SHP 400 W...	E40	100	4.50	ZRM 4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	SHP-T 400 W...	E40	100	4.50	ZRM 4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	SHP-TS400 W Grolux	E40	120	4.00	ZRM4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
	SHP-TS 400 W...	E40	100	4.50	ZRM 4.5-ES/C, ZRM4.5-ES/CT,ZRM6-ES/C, ZRM 4000 powerPULSE+	OGS400	-
Venture	LU 400 /T7/ (S51)	RSC	100	4.70	ZRM 6-ES/C, ZRM 6-ES/CT, ZRM 4000 powerPULSE+	OGS400	-
	LU 400 ... (S51)	Mogul	100	4.70	ZRM 6-ES/C, ZRM 6-ES/CT, ZRM 4000 powerPULSE+	OGS400	-

+ ballast with ignitor tap required

## 600 W High pressure sodium vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
BLV	NAH-T 600	E40	112	6.20	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGS 600	—
GE	LU 600	E40	115	6.00	ZRM 12-ES/C; ZRM 12-ES/CT ZRM 4000 powerPULSE+	OGS 600	—
Osram	NAV-T 600 SUPER 4Y	E40	112	6.20	ZRM 12-ES/C; ZRM 12-ES/CT ZRM 4000 powerPULSE+	OGS 600	—
Philips	SON-T plus 600 W	E40	115	5.80	ZRM 12-ES/C; ZRM 12-ES/CT ZRM 4000 powerPULSE+	OGS 600	—
Radium	RNP-T 600 W	E40	112	6.20	ZRM 12-ES/C; ZRM 12-ES/CT ZRM 4000 powerPULSE+	OGS 600	—
Sylvania	SHP-TS 600	E40	110	5.90	ZRM 12-ES/C; ZRM 12-ES/CT ZRM 4000 powerPULSE+	OGS 600	—
	SHP-TS 600 Grolux	E40	125	5.50	ZRM 12-ES/C; ZRM 12-ES/CT ZRM 4000 powerPULSE+	OGS 600	—

+ ballast with ignitor tap required


## 1,000 W High pressure sodium vapour lamps

Lamps manufacturer	description	lamp holder	nominal voltage (V)	nominal current (A)	Ignitors	Magnetic ballasts	Remote gear boxes
GE	LU 1000 (S52)	E40	250	4.70	ATIG-10	CWHS 1000	—
	LU 1000 /110	E40	110	10.30	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGS 1000	—
Iwasaki	NH 1000	E40	110	10.30	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGS 1000	—
	NHT 1000	E40	100	10.60	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGS 1000	—
	NHT 1000 B	E40	250	4.70	ATIG-10	CWHS 1000	—
	NHT 1000 F/I	E40	100	10.60	—	OGS 1000	—
Osram	NHT 1000 I	E40	100	10.60	—	OGS 1000	—
	NAV E 1000	E40	115	10.30	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGS 1000	—
	NAV T 1000	E40	110	10.60	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGS 1000	—
	SON 1000 W	E40	110	10.30	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGS 1000	—
Philips	SON-T 1000 W	E40	105	10.60	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGS 1000	—
	RNP-E 1000 W	E40	115	10.30	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGS 1000	—
	RNP-T 1000 W	E40	115	10.30	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGS 1000	—
	LU 1000 (S52)	E39	250	4.7	ATIG-10	CWHS 1000	—
Sylvania	SHP-T 1000 W...	E40	100	10.60	ZRM 12-ES/C, ZRM 12-ES/CT, ZRM 4000 powerPULSE+	OGS 1000	—
	LU 1000 (S52)	250	4.70	ATIG-10	CWHS 1000	—	
Venture	LU 1000 (S52)						—

+ ballast with ignitor tap required

## EC type HID ballasts

- slim cross-section and compact
- very short magnetic paths
- low magnetic stray field
- vacuum impregnation and short heat paths
- long service life
- non-audible noise level
- nomex fixed air-gap ensuring permanent calibration
- resistant to moisture and corrosion
- 24A double screw terminal
- low power consumption
- winding insulation class H materials
- tw130 winding temperature rating

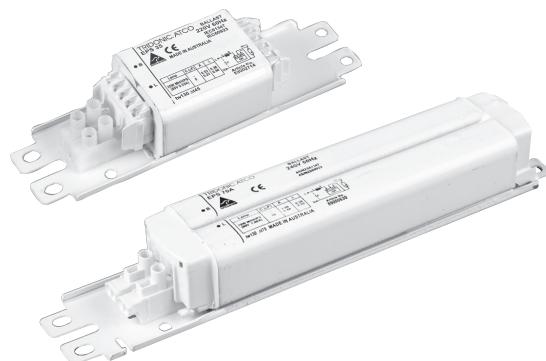

### 100% final testing

- continuity
- winding short circuit
- core to coil high voltage test
- operating values

figure 1


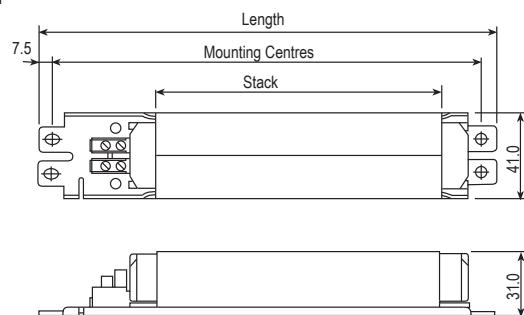


figure 2

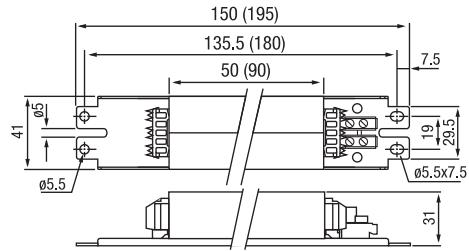

50 mm (90 mm) stack

**220 V 50 Hz and 220 V 60 Hz – EC ballasts**

Lamp			Ballast		Electrical								Thermal		Physical		
wattage	voltage	current	type	article number	loss hot W	input power W	lamp current A	lamp start current A	circuit PF cosφ	line current A@0.9PF	line start current A@0.9PF	capacitor μF0.9PF	stack Δt	length mm	mtg centres mm	weight kg	
W	V	A															

**220 V 50 Hz****High-pressure mercury vapour**

50	95	0.61	EMV50		13.0	63.0	0.610	0.810	0.47	0.318	0.444	6	65	90	195.0	180.0	1.00
80	115	0.80	EMV80-03		14.0	94.0	0.800	1.310	0.53	0.475	0.816	7	60	90	195.0	180.0	1.00
125	125	1.15	EMV125-02		21.0	146.0	1.150	1.710	0.58	0.737	1.150	9	70	140	225.0	210.0	1.40

**Metal-halide**

35	85	0.53	EPS35		11.4	46.4	0.530	0.665	0.40	0.234	0.309	6	55	90	195.0	180.0	1.00
50	95	0.61	EMV50		13.0	63.0	0.610	0.810	0.47	0.318	0.444	6	65	90	195.0	180.0	1.00
70	90	1.00	EPS70A-04		22.5	92.5	1.000	1.280	0.42	0.467	0.628	11	80	130	225.0	210.0	1.30
70	90	1.00	EPS70A (TH) <sup>1</sup>		22.5	92.5	1.000	1.280	0.42	0.467	0.628	11	80	130	225.0	210.0	1.30

**High-pressure sodium**

35	85	0.53	EPS35		11.4	46.4	0.530	0.665	0.40	0.234	0.309	6	55	90	195.0	180.0	1.00
50	85	0.76	EPS50-01		15.5	65.5	0.760	0.947	0.39	0.331	0.433	8	60	105	195.0	180.0	1.10
70	90	1.00	EPS70A-04		22.5	92.5	1.000	1.280	0.42	0.467	0.628	11	80	130	225.0	210.0	1.30
70	90	1.00	EPS70A (TH) <sup>1</sup>		22.5	92.5	1.000	1.280	0.42	0.467	0.628	11	80	130	225.0	210.0	1.30

**220 V 60 Hz****High-pressure mercury vapour**

50	95	0.61	EMV50-02		11.0	61.0	0.610	0.810	0.45	0.308	0.430	5	65	90	195.0	180.0	1.00
80	115	0.80	EMV80-04		13.0	93.0	0.800	1.310	0.53	0.470	0.808	6	60	90	195.0	180.0	1.00
125	125	1.15	EMV125-03		18.0	143.0	1.150	1.730	0.57	0.722	1.14	8	70	120	205.0	190.0	1.25

**Metal-halide**

35	85	0.53	EPS35	89002714	10.1	45.1	0.530	0.665	0.39	0.228	0.300	5	55	50	150.0	135.5	0.55
50	95	0.61	EMV50-02		11.0	61.0	0.610	0.810	0.45	0.308	0.430	5	65	90	195.0	180.0	1.00
70	90	1.00	EPS70A-03		19.0	89.0	1.000	1.270	0.40	0.449	0.599	9	75	105	195.0	180.0	1.10
70	90	1.00	EPS70A (TH) <sup>1</sup>		19.0	89.0	1.000	1.270	0.40	0.449	0.599	9	75	105	195.0	180.0	1.10

**High-pressure sodium**

35	85	0.53	EPS35	89002714	10.1	45.1	0.530	0.665	0.39	0.228	0.300	5	55	50	150.0	135.5	0.55
50	85	0.76	EPS50		13.7	63.7	0.760	0.947	0.38	0.322	0.421	7	65	90	195.0	180.0	1.00
70	90	1.00	EPS70A-03		19.0	89.0	1.000	1.270	0.40	0.449	0.599	9	75	105	195.0	180.0	1.10
70	90	1.00	EPS70A (TH) <sup>1</sup>		19.0	89.0	1.000	1.270	0.40	0.449	0.599	9	75	105	195.0	180.0	1.10

**notes**

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.

Ballasts for other wattage ratings available on request.

**230 V 50 Hz and 240 V 50 Hz – EC ballasts**

Lamp			Ballast		Electrical								Thermal	Physical		
wattage	voltage	current	type	article number	loss hot W	input power W	lamp current A	lamp start current A	circuit PF cosφ	line current A@0.9PF	line start current A@0.9PF	capacitor μF0.9PF	stack Δt	length mm	mtg centres mm	weight kg

**230 V 50 Hz**

## High-pressure mercury vapour

50	95	0.61	EMV50-03		13.5	63.5	0.610	0.800	0.45	0.307	0.422	6	65	90	195.0	180.0	1.00
80	115	0.80	EMV80-05		16.5	96.5	0.800	1.200	0.52	0.466	0.734	7	60	120	205.0	190.0	1.25
125	125	1.15	EMV125		21.0	146.0	1.150	1.660	0.55	0.705	1.070	9	70	160	245.0	230.0	1.55

## Metal-halide

35	85	0.53	EPS35		11.8	46.8	0.530	0.653	0.38	0.226	0.292	6	55	90	195.0	180.0	1.00
50	95	0.61	EMV50-03		13.5	63.5	0.610	0.800	0.45	0.307	0.422	6	65	90	195.0	180.0	1.00
70	90	1.00	EPS70A-05		23.5	93.5	1.000	1.240	0.41	0.452	0.588	10	75	140	225.0	210.0	1.40
70	90	1.00	EPS70A (TH) <sup>1</sup>		23.5	93.5	1.000	1.240	0.41	0.452	0.588	10	75	140	225.0	210.0	1.40

## High-pressure sodium

35	85	0.53	EPS35		11.8	46.8	0.530	0.653	0.38	0.226	0.292	6	55	90	195.0	180.0	1.00
50	85	0.76	EPS50		17.0	67.0	0.760	0.930	0.38	0.324	0.416	8	65	120	205.0	190.0	1.25
70	90	1.00	EPS70A-05		23.5	93.5	1.000	1.240	0.41	0.452	0.588	10	75	140	225.0	210.0	1.40
70	90	1.00	EPS70A (TH) <sup>1</sup>		23.5	93.5	1.000	1.240	0.41	0.452	0.588	10	75	140	225.0	210.0	1.40

**240 V 50 Hz**

## High-pressure mercury vapour

50	95	0.61	EMV50		14.0	64.0	0.610	0.791	0.44	0.296	0.403	6	65	90	195.0	180.0	1.00
75	130	0.64	EMV75		12.5	87.5	0.640	0.972	0.57	0.405	0.646	5	50	90	195.0	180.0	1.00
80	115	0.80	EMV80-00		17.0	97.0	0.800	1.110	0.51	0.449	0.654	7	60	120	205.0	190.0	1.25
125	125	1.15	EMV125	89000605	24.0	149.0	1.150	1.610	0.54	0.690	1.010	9	70	160	245.0	230.0	1.55
175	130	1.50	EMV175.5 <sup>3</sup>		29.0	204.0	1.500	2.500	0.57	0.944	1.650	11	60	90	195.0	180.0	1.00

## Metal-halide

35	85	0.53	EPS35		12.2	47.2	0.530	0.642	0.37	0.219	0.278	6	55	90	195.0	180.0	1.00
50	95	0.61	EMV50		14.0	64.0	0.610	0.791	0.44	0.296	0.403	6	65	90	195.0	180.0	1.00
70	90	1.00	EPS70A	89000630	24.5	94.5	1.000	1.220	0.39	0.438	0.560	10	75	140	225.0	210.0	1.40
70	90	1.00	EPS70A-01(TH) <sup>1</sup>		24.5	94.5	1.000	1.220	0.39	0.438	0.560	10	75	140	225.0	210.0	1.40
150	100	1.80	EPS150.5 <sup>3</sup>		38.5	188.5	1.800	2.120	0.44	0.873	1.080	18	75	140	225.0	210.0	1.40
150	100	1.80	EPS150.5-01(TH) <sup>1,3</sup>		38.5	188.5	1.800	2.120	0.44	0.873	1.080	18	75	140	225.0	210.0	1.40
175	130	1.50	EMV175.5 <sup>3</sup>		29.0	204.0	1.500	2.500	0.57	0.944	1.650	11	60	90	195.0	180.0	1.00

## High-pressure sodium

35	85	0.53	EPS35		12.2	47.2	0.530	0.642	0.37	0.219	0.278	6	55	90	195.0	180.0	1.00
50	85	0.76	EPS50		17.5	67.5	0.760	0.915	0.37	0.313	0.395	8	65	120	205.0	190.0	1.25
70	90	1.00	EPS70A	89000630	24.5	94.5	1.000	1.220	0.39	0.438	0.560	10	75	140	225.0	210.0	1.40
70	90	1.00	EPS70A-01(TH) <sup>1</sup>		24.5	94.5	1.000	1.220	0.39	0.438	0.560	10	75	140	225.0	210.0	1.40
150	100	1.80	EPS150.5 <sup>3</sup>		38.5	188.5	1.800	2.120	0.44	0.873	1.080	18	75	140	225.0	210.0	1.40
150	100	1.80	EPS150.5-01(TH) <sup>1,3</sup>		38.5	188.5	1.800	2.120	0.44	0.873	1.080	18	75	140	225.0	210.0	1.40

## Low-pressure sodium

18	57	0.35	ECLS18 <sup>2</sup>		10.5	28.5	0.350	0.390	0.90	0.145	0.170	5	60	50	150.0	135.0	0.55
18	57	0.35	ECLS18-01 <sup>2</sup>	89000003	10.5	28.5	0.350	0.390	0.90	0.145	0.170	5	60	50	110.0	101.5	0.55

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.

2. Capacitor - dual function - power factor correction and starting aid.

3. Split ballast, two required.

Ballasts for other wattage ratings available on request.

## OM type ballasts



- Compact size
- Vacuum impregnation and short heat paths
- Long service life
- Very low noise level
- Glass-fibre filled nylon coil end covers
- Winding insulation Class H materials
- Nomex fixed air gap ensuring permanent calibration
- Integral terminals
- tw130 winding temperature rating
- Resistant to moisture and corrosion

### 100% final testing

- continuity
- winding short circuit
- insulation
- impedance



figure 1

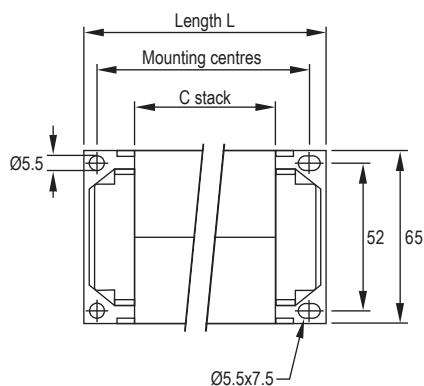

## 220 V 50 Hz – OM ballasts

Lamp			Ballast		Electrical								Thermal		Physical		
wattage	voltage	current	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current	line start current	capacitor	stack	length	mtg centres	weight	
W	V	A			W	W	A	A	cosφ	A@0.9PF	A@0.9PF	μF0.9PF	Δt	mm	mm	kg	
<b>High-pressure mercury vapour</b>																	
40	90	0.53	OMB40-01		8.0	48.0	0.53	0.66	0.41	0.24	0.32	6	65	30	65	51	0.8
50	95	0.61	OMB50-04		8.5	58.5	0.61	0.80	0.44	0.30	0.41	7	60	30	65	51	0.8
80	115	0.80	OMB80-06	89001036	9.0	89.0	0.80	1.10	0.51	0.45	0.65	8	65	35	70	56	1.0
80	115	0.80	OMB80-11		13.0	93.0	0.80	1.15	0.53	0.47	0.71	7	70	30	70	56	0.9
100	130	0.85	OMB100-01		8.5	108.5	0.85	1.35	0.58	0.55	0.91	7	45	55	90	76	1.3
100	130	0.85	OMB100-03		11.5	111.5	0.85	1.50	0.60	0.56	1.04	7	65	40	90	76	1.2
100	115	1.00	OMB100A-06		11.5	111.5	1.00	1.36	0.51	0.56	0.80	9	65	55	90	76	1.3
125	125	1.15	OMB125-06	89000981	11.5	136.5	1.15	1.66	0.54	0.69	1.04	10	55	55	90	76	1.3
125	125	1.15	OMB125-10		14.5	139.5	1.15	1.91	0.55	0.70	1.23	10	70	40	90	76	1.2
175	130	1.50	OMB175-01		14.5	189.5	1.50	2.48	0.57	0.96	1.66	12	65	75	110	96	1.7
175	130	1.50	OMB175-09		17.5	192.5	1.50	2.56	0.58	0.97	1.74	12	70	55	110	96	1.6
250	130	2.13	OMB250-02		19.5	269.5	2.13	3.25	0.58	1.36	2.18	18	65	105	140	126	2.4
250	130	2.13	OMB250-04		21.0	271.0	2.13	3.50	0.58	1.37	2.36	18	70	85	140	126	2.1
250	130	2.13	OMB250-06		22.0	272.0	2.13	3.60	0.58	1.37	2.44	18	75	75	140	126	1.8
400	135	3.25	OMB400-01		31.0	431.0	3.25	5.64	0.60	2.18	3.97	25	75	120	180	166	2.9
<b>Metal-halide</b>																	
35	85	0.53	OMS35-01	89001137	8.0	43.0	0.53	0.65	0.37	0.22	0.28	6	55	30	65	51	0.8
35	85	0.53	OMS35-03 (TH) <sup>1</sup>		8.0	43.0	0.53	0.65	0.37	0.22	0.28	6	55	30	65	51	0.8
50	95	0.61	OMB50-04		8.5	58.5	0.61	0.80	0.44	0.30	0.41	7	60	30	65	51	0.8
70	90	1.00	OMS70A-04		13.0	83.0	1.00	1.16	0.38	0.42	0.51	11	60	55	90	76	1.3
70	90	1.00	OMS70A-08 (TH) <sup>1</sup>		13.0	83.0	1.00	1.16	0.38	0.42	0.51	11	60	55	90	76	1.3
70	90	1.00	OMS70A-16	89001172	15.0	85.0	1.00	1.29	0.39	0.43	0.58	11	65	40	90	76	1.2
70	90	1.00	OMS70A-20 (TH) <sup>1</sup>		15.0	85.0	1.00	1.29	0.39	0.43	0.58	11	65	40	90	76	1.2
100	100	1.10	OMH100-03 (TH) <sup>1</sup>	89001058	13.0	113.0	1.10	1.45	0.47	0.57	0.79	11	65	65	100	86	1.5
100	100	1.10	OMH100-06		16.0	116.0	1.10	1.50	0.48	0.59	0.84	11	70	55	100	86	1.4
150	100	1.80	OMS150-26 <sup>2</sup>	89001109	18.5	168.5	1.80	2.30	0.43	0.85	1.14	20	55	105	155	141	2.5
150	100	1.80	OMS150-08	89001100	20.0	170.0	1.80	2.32	0.43	0.86	1.16	20	65	85	140	126	2.1
150	100	1.80	OMS150-10 (TH) <sup>1</sup>	89001102	20.0	170.0	1.80	2.32	0.43	0.86	1.16	20	65	85	140	126	2.1
150	100	1.80	OMS150-27	89001110	22.0	172.0	1.80	2.35	0.43	0.87	1.19	18	70	75	140	126	1.8
175	130	1.50	OMB175-01		14.5	189.5	1.50	2.48	0.57	0.96	1.66	12	65	75	110	96	1.7
175	130	1.50	OMB175-09		17.5	192.5	1.50	2.56	0.58	0.97	1.74	12	70	55	110	96	1.6
250	130	2.13	OMB250-02		19.5	269.5	2.13	3.25	0.58	1.36	2.18	18	65	105	140	126	2.4
250	130	2.13	OMB250-04		21.0	271.0	2.13	3.50	0.58	1.37	2.36	18	70	85	140	126	2.1
250	130	2.13	OMB250-06		22.0	272.0	2.13	3.60	0.58	1.37	2.44	18	75	75	140	126	1.8
250	100	3.00	OMS250-01	89001132	35.0	285.0	2.95	3.67	0.44	1.44	1.88	30	75	120	180	166	2.9
<b>High-pressure sodium</b>																	
35	85	0.53	OMS35-01	89001137	8.0	43.0	0.53	0.65	0.37	0.22	0.28	6	55	30	65	51	0.8
35	85	0.53	OMS35-03 (TH) <sup>1</sup>		8.0	43.0	0.53	0.65	0.37	0.22	0.28	6	55	30	65	51	0.8
50	85	0.76	OMS50-02		10.5	60.5	0.76	0.90	0.36	0.31	0.38	9	65	40	75	61	1.1
70	90	0.95	OMS70-03		11.5	81.5	0.94	1.16	0.39	0.41	0.53	10	60	55	90	76	1.4
70	90	1.00	OMS70A-04		13.0	83.0	1.00	1.16	0.38	0.42	0.51	11	60	55	90	76	1.3
70	90	1.00	OMS70A-08 (TH) <sup>1</sup>		13.0	83.0	1.00	1.16	0.38	0.42	0.51	11	60	55	90	76	1.3
70	90	1.00	OMS70A-16	89001172	15.0	85.0	1.00	1.29	0.39	0.43	0.58	11	65	40	90	76	1.2
70	90	1.00	OMS70A-20 (TH) <sup>1</sup>		15.0	85.0	1.00	1.29	0.39	0.43	0.58	11	65	40	90	76	1.2
100	100	1.20	OMS100-01	89001078	13.5	113.5	1.20	1.50	0.43	0.57	0.75	13	70	65	100	86	1.5
150	100	1.80	OMS150-26 <sup>2</sup>	89001109	18.5	168.5	1.80	2.30	0.43	0.85	1.14	20	55	105	155	141	2.5
150	100	1.80	OMS150-08	89001100	20.0	170.0	1.80	2.32	0.43	0.86	1.16	20	65	85	140	126	2.1
150	100	1.80	OMS150-10 (TH) <sup>1</sup>	89001102	20.0	170.0	1.80	2.32	0.43	0.86	1.16	20	65	85	140	126	2.1
150	100	1.80	OMS150-27	89001110	22.0	172.0	1.80	2.35	0.43	0.87	1.19	18	70	75	140	126	1.8
150	100	1.80	OMS150/100		20.0	170	1.80	2.30	0.43	0.86	1.15	20	55	105	155	141	2.5
250	100	3.00	OMS250-01	89001132	35.0	285.0	2.95	3.67	0.44	1.44	1.88	30.0	75	120	180	166	2.9

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.

2. With multiple voltage tappings

Ballasts for other wattage ratings available on request.

## 220 V 60 Hz – OM ballasts

Lamp			Ballast		Electrical								Thermal	Physical			
wattage	voltage	current	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current	line start current	capacitor	stack	length	mtg centres	weight	
W	V	A			W	W	A	A	cosφ	A@0.9PF	A@0.9PF	μF0.9PF	Δt	mm	mm	kg	
<b>High-pressure mercury vapour</b>																	
40	90	0.53	OMB40-02		8.0	48.0	0.53	0.65	0.41	0.24	0.31	5	65	30	65	51	0.8
50	95	0.61	OMB50-05		8.0	58.0	0.61	0.84	0.43	0.29	0.42	6	60	30	65	51	0.8
80	115	0.80	OMB80-07		8.5	88.5	0.80	1.30	0.50	0.45	0.76	6	65	30	65	51	0.8
100	130	0.85	OMB100-02		9.0	109.0	0.85	1.50	0.58	0.55	1.02	6	65	40	75	61	1.1
100	115	1.00	OMB100A-05		10.0	110.0	1.00	1.60	0.50	0.56	0.93	8	65	40	75	61	1.1
125	125	1.15	OMB125-08		10.0	135.0	1.15	1.80	0.53	0.68	1.12	9	65	55	90	76	1.3
125	125	1.15	OMB125-16		13.0	138.0	1.15	1.90	0.55	0.70	1.21	8	70	35	90	76	1.1
175	130	1.50	OMB175-03	89000993	13.5	188.5	1.50	2.35	0.57	0.95	1.57	10	65	75	110	96	1.7
250	130	2.13	OMB250-09		16.5	266.5	2.13	3.15	0.57	1.35	2.09	15	60	105	140	126	2.4
250	130	2.13	OMB250-05		18.0	268.0	2.13	3.20	0.57	1.35	2.14	15	65	85	140	126	2.1
250	130	2.13	OMB250-10	89001014	19.5	269.5	2.13	3.25	0.58	1.36	2.18	15	70	75	140	126	1.8
400	135	3.25	OMB400-02		26.0	426.0	3.25	5.00	0.60	2.15	3.48	25	65	120	180	166	2.9
400	135	3.25	OMB400-03		27.5	427.5	3.25	5.30	0.60	2.16	3.70	25	70	105	180	166	2.5
<b>Metal-halide</b>																	
35	85	0.53	OMS35-08	89002543	8.0	43.0	0.53	0.65	0.37	0.22	0.28	5	55	30	65	51	0.8
35	85	0.53	OMS35-05 (TH) <sup>1</sup>	89001141	8.0	43.0	0.53	0.65	0.37	0.22	0.28	5	55	30	65	51	0.8
50	95	0.61	OMB50-05		8.0	58.0	0.61	0.84	0.43	0.29	0.42	6	60	30	65	51	0.8
70	90	1.00	OMS70A-01		11.5	81.5	1.00	1.30	0.37	0.41	0.56	9	60	40	75	61	1.1
70	90	1.00	OMS70A-09 (TH) <sup>1</sup>	89001167	11.5	81.5	1.00	1.30	0.37	0.41	0.56	9	60	40	75	61	1.1
70	90	1.00	OMS70A-32		13.0	83.0	1.00	1.45	0.38	0.42	0.64	9	70	35	75	61	1.1
100	100	1.10	OMH100-04		14.0	114.0	1.10	1.46	0.47	0.58	0.80	9	70	45	90	76	1.3
100	100	1.10	OMH100-12 (TH) <sup>1</sup>	89001065	14.0	114.0	1.10	1.46	0.47	0.58	0.80	9	70	45	90	76	1.3
150	100	1.80	OMS150-02		18.5	168.5	1.80	2.26	0.43	0.85	1.12	16	65	75	120	106	1.8
150	100	1.80	OMS150-09 (TH) <sup>1</sup>	89001101	18.5	168.5	1.80	2.26	0.43	0.85	1.12	16	65	75	120	106	1.8
150	100	1.80	OMS150-32		20.5	170.5	1.80	2.26	0.43	0.86	1.14	16	70	65	120	106	1.6
175	130	1.50	OMB175-03	89000993	13.5	188.5	1.50	2.35	0.57	0.95	1.57	10	65	75	110	96	1.7
250	130	2.13	OMB250-09		16.5	266.5	2.13	3.15	0.57	1.35	2.09	15	60	105	140	126	2.4
250	130	2.13	OMB250-05		18.0	268.0	2.13	3.20	0.57	1.35	2.14	15	65	85	140	126	2.1
250	130	2.13	OMB250-10	89001014	19.5	269.5	2.13	3.25	0.58	1.36	2.18	15	70	75	140	126	1.8
250	100	3.00	OMS250-02		31.0	281.0	2.95	3.70	0.43	1.42	1.87	25	80	105	180	166	2.5
250	100	3.00	OMS250		31.0	281.0	2.95	3.70	0.43	1.42	1.87	25	80	105	155	141	2.4
400	135	3.25	OMB400-02		26.0	426.0	3.25	5.00	0.60	2.15	3.48	25	65	120	180	166	2.9
400	135	3.25	OMB400-03		27.5	427.5	3.25	5.30	0.60	2.16	3.70	25	70	105	180	166	2.5
<b>High-pressure sodium</b>																	
35	85	0.53	OMS35-08	89002543	8.0	43.0	0.53	0.65	0.37	0.22	0.28	5	55	30	65	51	0.8
35	85	0.53	OMS35-05 (TH) <sup>1</sup>	89001141	8.0	43.0	0.53	0.65	0.37	0.22	0.28	5	55	30	65	51	0.8
50	85	0.76	OMS50-04		10.0	60.0	0.76	0.92	0.36	0.30	0.39	7	60	35	70	56	1.0
70	90	0.95	OMS70-04		10.5	80.5	0.94	1.16	0.39	0.41	0.53	9	60	40	75	61	1.1
70	90	1.00	OMS70A-01		11.5	81.5	1.00	1.30	0.37	0.41	0.56	9	60	40	75	61	1.1
70	90	1.00	OMS70A-09 (TH) <sup>1</sup>	89001167	11.5	81.5	1.00	1.30	0.37	0.41	0.56	9	60	40	75	61	1.1
70	90	1.00	OMS70A-32		13.0	83.0	1.00	1.45	0.38	0.42	0.64	9	70	35	75	61	1.1
70	90	1.00	OMS70A/50 <sup>2</sup>		12.3	82.3	1.00	1.30	0.37	0.42	0.57	9	65	40	75	61	1.1
100	100	1.20	OMS100-05		12.5	112.5	1.20	1.50	0.43	0.57	0.75	11	60	55	90	76	1.3
150	100	1.80	OMS150-02		18.5	168.5	1.80	2.26	0.43	0.85	1.12	16	65	75	120	106	1.8
150	100	1.80	OMS150-09 (TH) <sup>1</sup>	89001101	18.5	168.5	1.80	2.26	0.43	0.85	1.12	16	65	75	120	106	1.8
150	100	1.80	OMS150-32		20.5	170.5	1.80	2.26	0.43	0.86	1.14	16	70	65	120	106	1.6
250	100	3.00	OMS250-02		31.0	281.0	2.95	3.70	0.43	1.42	1.87	25	80	105	180	166	2.5
250	100	3.00	OMS250		31.0	281.0	2.95	3.70	0.43	1.42	1.87	25	80	105	155	141	2.4

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.
2. With power tappings

Ballasts for other wattage ratings available on request.

**230 V 50 Hz – OM ballasts**

Lamp			Ballast		Electrical								Thermal	Physical			
wattage	voltage	current	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current	line start current	capacitor	stack	length	mtg centres	weight	
W	V	A			W	W	A	A	cosφ	A@0.9PF	A@0.9PF	μF0.9PF	Δt	mm	mm	kg	
<b>High-pressure mercury vapour</b>																	
50	95	0.61	OMB50-01		9.0	59.0	0.61	0.78	0.42	0.29	0.38	6	65	30	65	51	0.8
80	115	0.80	OMB80-05		9.5	89.5	0.80	1.20	0.49	0.43	0.68	8	65	40	75	61	1.1
80	115	0.80	OMB80-08		13.0	93.0	0.80	1.25	0.51	0.45	0.74	7	70	30	75	61	0.9
125	125	1.15	OMB125-03		12.0	137.0	1.15	1.66	0.52	0.66	1.00	10	60	55	90	76	1.4
125	125	1.15	OMB125-09		14.5	139.5	1.15	1.92	0.53	0.67	1.18	10	65	45	90	76	1.3
175	130	1.50	OMB175-02		15.0	190.0	1.50	2.34	0.55	0.92	1.50	12	65	85	120	106	2.0
250	130	2.13	OMB250-15		19.5	269.5	2.13	3.15	0.55	1.30	2.02	18	65	105	140	126	2.4
250	130	2.13	OMB250-07		23.0	273.0	2.13	3.60	0.56	1.32	2.34	18	70	85	140	126	2.1
<b>Metal-halide</b>																	
35	85	0.53	OMS35-02 (TH) <sup>1</sup>		9.0	44.0	0.53	0.64	0.36	0.21	0.27	6	60	30	65	51	0.8
50	95	0.61	OMB50-01		9.0	59.0	0.61	0.78	0.42	0.29	0.38	6	65	30	65	51	0.8
70	90	1.00	OMS70A-15		13.5	83.5	1.00	1.11	0.36	0.40	0.47	11	65	65	100	86	1.5
70	90	1.00	OMS70A-11 (TH) <sup>1</sup>		13.5	83.5	1.00	1.11	0.36	0.40	0.47	11	65	65	100	86	1.5
70	90	1.00	OMS70A-23	89001179	15.5	85.5	1.00	1.25	0.37	0.41	0.54	11	65	45	100	86	1.3
100	100	1.10	OMH100		13.5	113.5	1.10	1.43	0.45	0.55	0.75	11	65	65	100	86	1.5
100	100	1.10	OMH100-02 (TH) <sup>1</sup>		13.5	113.5	1.10	1.43	0.45	0.55	0.75	11	65	65	100	86	1.5
150	100	1.80	OMS150-15		19.0	169.0	1.80	2.34	0.41	0.82	1.11	18	50	105	155	141	2.5
150	100	1.80	OMS150-05 (TH) <sup>1</sup>		21.0	171.0	1.80	2.34	0.41	0.83	1.13	18	60	105	155	141	2.5
150	100	1.80	OMS150-28		21.5	171.5	1.80	2.39	0.41	0.83	1.16	18	65	85	155	141	2.1
175	130	1.50	OMB175-02		15.0	190.0	1.50	2.34	0.55	0.92	1.50	12	65	85	120	106	2.0
250	130	2.13	OMB250-15		19.5	269.5	2.13	3.15	0.55	1.30	2.02	18	65	105	140	126	2.4
250	130	2.13	OMB250-07		23.0	273.0	2.13	3.60	0.56	1.32	2.34	18	70	85	140	126	2.1
<b>High-pressure sodium</b>																	
35	85	0.53	OMS35-02 (TH) <sup>1</sup>		9.0	44.0	0.53	0.64	0.36	0.21	0.27	6	60	30	65	51	0.8
50	85	0.76	OMS50-15		10.5	60.5	0.76	0.84	0.35	0.29	0.34	9	65	55	90	76	1.3
70	90	0.95	OMS70-02		12.0	82.0	0.94	1.14	0.38	0.40	0.50	10	70	55	90	76	1.4
70	90	1.00	OMS70A-15		13.5	83.5	1.00	1.11	0.36	0.40	0.47	11	65	65	100	86	1.5
70	90	1.00	OMS70A-11 (TH) <sup>1</sup>		13.5	83.5	1.00	1.11	0.36	0.40	0.47	11	65	65	100	86	1.5
70	90	1.00	OMS70A-23	89001179	15.5	85.5	1.00	1.25	0.37	0.41	0.54	11	65	45	100	86	1.3
100	100	1.20	OMS100-04		14.0	114.0	1.20	1.52	0.41	0.55	0.73	12	65	75	110	96	1.7
150	100	1.80	OMS150-15		19.0	169.0	1.80	2.34	0.41	0.82	1.11	18	50	105	155	141	2.5
150	100	1.80	OMS150-05 (TH) <sup>1</sup>		21.0	171.0	1.80	2.34	0.41	0.83	1.13	18	60	105	155	141	2.5
150	100	1.80	OMS150-28		21.5	171.5	1.80	2.39	0.41	0.83	1.16	18	65	85	155	141	2.1

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.

Ballasts for other wattage ratings available on request.

**240 V 50 Hz – OM ballasts**

Lamp			Ballast		Electrical								Thermal		Physical		
wattage	voltage	current	type	article number	loss hot W	input power W	lamp current A	lamp start current A	circuit PF cosφ	line current A@0.9PF	line start current A@0.9PF	capacitor μF0.9PF	stack Δt	length mm	mtg centres mm	weight kg	
<b>High-pressure mercury vapour</b>																	
40	90	0.53	OMB40		8	48.0	0.53	0.65	0.38	0.22	0.29	6	65	30	65	51	0.8
50	95	0.61	OMB50	89001024	9	59.0	0.61	0.76	0.40	0.27	0.36	6	65	30	65	51	0.8
75	130	0.64	OMB75		9.5	84.5	0.64	0.92	0.55	0.39	0.59	5	65	35	70	56	1.0
80	115	0.80	OMB80	89001030	9.5	89.5	0.80	1.11	0.47	0.41	0.60	7	65	40	75	61	1.1
80	115	0.80	OMB80-00		13.5	93.5	0.80	1.33	0.49	0.43	0.76	7	70	30	75	61	0.9
100	130	0.85	OMB100		10.0	110.0	0.85	1.21	0.54	0.51	0.76	7	60	55	90	76	1.3
100	130	0.85	OMB100-00		13.0	113.0	0.85	1.22	0.55	0.52	0.79	7	65	45	90	76	1.3
100	115	1.00	OMB100A		12.0	112.0	1.00	1.36	0.47	0.52	0.74	9	65	55	90	76	1.3
100	115	1.00	OMB100A-00		15.0	115.0	1.00	1.40	0.48	0.53	0.78	9	70	45	90	76	1.3
125	125	1.15	OMB125	89000974	12.0	137.0	1.15	1.66	0.50	0.63	0.96	10	60	65	100	86	1.5
125	125	1.15	OMB125-00	89000976	15.5	140.5	1.15	1.90	0.51	0.65	1.13	10	65	45	100	86	1.3
175	130	1.50	OMB175	89000990	16.0	191.0	1.50	2.29	0.53	0.88	1.42	12	65	85	120	106	2.0
175	130	1.50	OMB175-00		20.0	195.0	1.50	2.12	0.54	0.90	1.34	12	75	65	120	106	1.6
250	130	2.13	OMB250	89001000	19.5	269.5	2.13	3.15	0.53	1.25	1.94	18	65	120	155	141	2.8
250	130	2.13	OMB250-00	89001004	24.5	274.5	2.13	3.60	0.54	1.27	2.26	18	70	85	155	141	2.1
<b>Metal-halide</b>																	
35	85	0.53	OMS35	89001136	9.0	44.0	0.53	0.60	0.35	0.20	0.24	6	55	40	75	61	1.1
35	85	0.53	OMS35-04 (TH) <sup>1</sup>	89001140	9.0	44.0	0.53	0.60	0.35	0.20	0.24	6	55	40	75	61	1.1
35	85	0.53	OMS35-00		10.0	45.0	0.53	0.61	0.35	0.21	0.25	6	60	30	75	61	0.9
35	85	0.53	OMS35 (TH) <sup>1</sup>		10.0	45.0	0.53	0.61	0.35	0.21	0.25	6	60	30	75	61	0.9
50	95	0.61	OMB50	89001024	9.0	59.0	0.61	0.76	0.40	0.27	0.36	6	65	30	65	51	0.8
70	90	1.00	OMSL70A-01 <sup>6</sup>	89001195	8.2	78.2	1.00	1.12	0.33	0.36	0.43	11	30	85	120	106	2.0
70	90	1.00	OMS70A	89001157	14.0	84.0	1.00	1.16	0.35	0.39	0.47	11	65	65	100	86	1.5
70	90	1.00	OMS70A-02 (TH) <sup>1</sup>	89001160	14.0	84.0	1.00	1.16	0.35	0.39	0.47	11	65	65	100	86	1.5
70	90	1.00	OMS70A-00	89001158	16.0	86.0	1.00	1.22	0.36	0.40	0.51	11	70	45	100	86	1.3
70	90	1.00	OMS70A-21 (TH) <sup>1</sup>	89001177	16.0	86.0	1.00	1.22	0.36	0.40	0.51	11	70	45	100	86	1.3
100	100	1.10	OMH100	89001055	14.0	114.0	1.10	1.40	0.43	0.53	0.71	11	70	65	100	86	1.5
100	100	1.10	OMH100-01 (TH) <sup>1</sup>	89001056	14.0	114.0	1.10	1.40	0.43	0.53	0.71	11	70	65	100	86	1.5
150	100	1.80	OMS150	89001093	20.0	170.0	1.80	2.30	0.39	0.79	1.06	18	55	105	155	141	2.4
150	100	1.80	OMS150-26 <sup>6</sup>	89001109	20	170	1.80	2.30	0.39	0.79	1.06	18	55	105	155	141	2.5
150	100	1.80	OMS150-04 (TH) <sup>1</sup>	89001096	22.0	172.0	1.80	2.30	0.40	0.80	1.07	18	60	105	155	141	2.4
150	100	1.80	OMS150-00	89001094	22.5	172.5	1.80	2.35	0.40	0.80	1.09	18	65	85	155	141	2.1
150	100	1.80	OMS150-17 (TH) <sup>1</sup>	89001105	22.5	172.5	1.80	2.35	0.40	0.80	1.09	18	65	85	120	106	2.0
150	100	1.80	OMS150-22 (TH) <sup>1</sup>		22.5	172.5	1.80	2.35	0.40	0.80	1.09	18	65	85	155	141	2.1
175	130	1.50	OMB175	89000990	16.0	191.0	1.50	2.29	0.53	0.88	1.42	12	65	85	120	106	2.0
175	130	1.50	OMB175-00		20.0	195.0	1.50	2.12	0.54	0.90	1.34	12	75	65	120	106	1.6
250	130	2.13	OMB250	89001000	19.5	269.5	2.13	3.15	0.53	1.25	1.94	18	65	120	155	141	2.8
250	130	2.13	OMB250-00	89001004	24.5	274.5	2.13	3.60	0.54	1.27	2.26	18	70	85	155	141	2.1
250	100	3.00	OMS250.5 <sup>5</sup>		36.0	286.0	3.00	3.60	0.40	1.32	1.67	30	65	85	120	106	2.1

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.
2. Capacitor – dual function – power factor correction and starting aid.
3. Use with ZRM36-LP/B.
4. Use with suitable ignitor.
5. Split ballast, two required.
6. With multiple voltage tappings

Ballasts for other wattage ratings available on request.

**240 V 50 Hz – OM ballasts**

Lamp			Ballast		Electrical								Thermal		Physical		
wattage	voltage	current	type	article number	loss hot W	input power W	lamp current A	lamp start current A	circuit PF cosφ	line current A@0.9PF	line start current A@0.9PF	capacitor μF0.9PF	Δt	stack mm	length mm	mtg centres mm	weight kg
<b>High-pressure sodium</b>																	
35	85	0.53	OMS35	89001136	9.0	44.0	0.53	0.60	0.35	0.20	0.24	6	55	40	75	61	1.1
35	85	0.53	OMS35-04 (TH) <sup>1</sup>	89001140	9.0	44.0	0.53	0.60	0.35	0.20	0.24	6	55	40	75	61	1.1
35	85	0.53	OMS35-00		10.0	45.0	0.53	0.61	0.35	0.21	0.25	6	60	30	75	61	0.9
35	85	0.53	OMS35 (TH) <sup>1</sup>		10.0	45.0	0.53	0.61	0.35	0.21	0.25	6	60	30	75	61	0.9
50	85	0.76	OMS50	89001144	11.5	61.5	0.76	0.87	0.34	0.28	0.34	8	65	55	90	76	1.4
50	85	0.76	OMS50-00		14.0	64.0	0.76	0.90	0.35	0.30	0.37	8	75	35	90	76	1.1
70	90	0.95	OMS70	89001151	12.5	82.5	0.94	1.14	0.37	0.38	0.49	10	70	55	90	76	1.4
70	90	1.00	OMSL70A-01 <sup>6</sup>	89001195	8.2	78.2	1.00	1.12	0.33	0.36	0.43	11	30	85	120	106	2.0
70	90	1.00	OMS70A	89001157	14.0	84.0	1.00	1.16	0.35	0.39	0.47	11	65	65	100	86	1.5
70	90	1.00	OMS70A-02 (TH) <sup>1</sup>	89001160	14.0	84.0	1.00	1.16	0.35	0.39	0.47	11	65	65	100	86	1.5
70	90	1.00	OMS70A-00	89001158	16.0	86.0	1.00	1.22	0.36	0.40	0.51	11	70	45	100	86	1.3
70	90	1.00	OMS70A-21 (TH) <sup>1</sup>	89001177	16.0	86.0	1.00	1.22	0.36	0.40	0.51	11	70	45	100	86	1.3
100	100	1.20	OMS100	89001077	14.5	114.5	1.20	1.50	0.40	0.53	0.70	12	65	75	110	96	1.7
100	100	1.20	OMS100-00		18.0	118.0	1.20	1.45	0.41	0.55	0.69	12	75	55	110	96	1.5
150	100	1.80	OMS150	89001093	20.0	170.0	1.80	2.30	0.39	0.79	1.06	18	55	105	155	141	2.4
150	100	1.80	OMS150-26 <sup>6</sup>	89001109	20	170	1.80	2.30	0.39	0.79	1.06	18	55	105	155	141	2.5
150	100	1.80	OMS150-04 (TH) <sup>1</sup>	89001096	22.0	172.0	1.80	2.30	0.40	0.80	1.07	18	60	105	155	141	2.4
150	100	1.80	OMS150-00	89001094	22.5	172.5	1.80	2.35	0.40	0.80	1.09	18	65	85	155	141	2.1
150	100	1.80	OMS150-17 (TH) <sup>1</sup>	89001105	22.5	172.5	1.80	2.35	0.40	0.80	1.09	18	65	85	120	106	2.0
150	100	1.80	OMS150-22 (TH) <sup>1</sup>		22.5	172.5	1.80	2.35	0.40	0.80	1.09	18	65	85	155	141	2.1
150	100	1.80	OMS150/100 (TH) <sup>7</sup>	89003580	22.5	172.5	1.80	2.30	0.40	0.80	1.07	18	55	105	155	141	2.5
250	100	3.00	OMS250.5 <sup>5</sup>		36.0	286.0	3.00	3.60	0.40	1.32	1.67	30	65	85	120	106	2.1
<b>Low-pressure sodium</b>																	
18	57	0.35	OMLS18 <sup>2</sup>		7.5	25.5	0.35	0.36	0.30	0.12	0.13	4	55	30	65	51	0.8
26	84	0.35	OMLS26 <sup>3</sup>		6.5	32.5	0.35	0.40	0.39	0.15	0.18	3.5	50	30	65	51	0.8
35	70	0.60	OMLS35/55 <sup>3</sup>		10.0	45.0	0.60	0.64	0.31	0.21	0.23	7	55	40	75	61	1.1
55	109	0.59	OMLS35/55 <sup>3</sup>		10.0	65.0	0.59	0.64	0.46	0.30	0.34	6	55	40	75	61	1.1
90	112	0.94	OMLS90 <sup>4</sup>		12.5	102.5	0.94	0.99	0.45	0.47	0.52	9	60	65	100	86	1.5

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.

2. Capacitor – dual function – power factor correction and starting aid.

3. Use with ZRM36-LP/B.

4. Use with suitable ignitor.

5. Split ballast, two required.

6. With multiple voltage tappings

7. With power tappings

Ballasts for other wattage ratings available on request.

**250 V 50 Hz – OM ballasts**

Lamp			Ballast		Electrical								Thermal	Physical			
wattage	voltage	current	type	article number	loss hot W	input power W	lamp current A	lamp start current A	circuit PF cosφ	line current A@0.9PF	line start current A@0.9PF	capacitor μF0.9PF	Δt	stack mm	length mm	mtg centres mm	weight kg
W	V	A															
<b>High-pressure mercury vapour</b>																	
40	90	0.53	OMB40		10.7	50.7	0.53	0.64	0.38	0.23	0.29	5	65	30	65	51	0.8
50	95	0.61	OMB50-02	89001025	11.7	61.7	0.61	0.75	0.40	0.27	0.35	6	65	30	65	51	0.8
75	130	0.64	OMB75		10.2	85.2	0.64	0.88	0.53	0.38	0.55	5	65	35	70	56	1.0
80	115	0.80	OMB80-03	89001033	12.4	92.4	0.80	1.05	0.46	0.41	0.57	7	65	40	75	61	1.1
100	130	0.85	OMB100		11.9	111.9	0.85	1.17	0.53	0.50	0.72	7	60	55	90	76	1.3
100	115	1.00	OMB100A		14.1	114.1	1.00	1.31	0.46	0.51	0.70	9	65	55	90	76	1.3
125	125	1.15	OMB125-05	89000980	14.2	139.2	1.15	1.58	0.48	0.62	0.89	10	60	65	100	86	1.5
175	130	1.50	OMB175		17.6	192.6	1.50	2.08	0.51	0.86	1.25	12	65	85	120	106	2.0
250	130	2.13	OMB250		23.3	273.3	2.13	2.96	0.51	1.21	1.77	18	65	120	155	141	2.8
<b>Metal-halide</b>																	
50	95	0.61	OMB50-02	89001025	11.7	61.7	0.61	0.75	0.40	0.27	0.35	6	65	30	65	51	0.8
70	90	1.00	OMSL70A-01 <sup>3</sup>	89001195	8.6	78.6	1.00	1.12	0.31	0.35	0.41	11	30	85	120	106	2.0
70	90	1.00	OMSL70A (TH) <sup>1</sup>	89002558	8.6	78.6	1.00	1.12	0.31	0.35	0.41	11	30	85	120	106	2.0
70	90	1.00	OMS70A-05	89001163	15.3	85.3	1.00	1.20	0.34	0.38	0.48	10	65	65	100	86	1.5
70	90	1.00	OMS70A (TH) <sup>1</sup>		15.3	85.3	1.00	1.20	0.34	0.38	0.48	10	65	65	100	86	1.5
100	100	1.10	OMH100		15.7	115.7	1.10	1.37	0.42	0.51	0.67	10	70	65	100	86	1.5
100	100	1.10	OMH100 (TH) <sup>1</sup>		15.7	115.7	1.10	1.37	0.42	0.51	0.67	10	70	65	100	86	1.5
150	100	1.80	OMS150-11	89001103	21.5	171.5	1.80	2.20	0.38	0.76	0.98	18	60	105	155	141	2.4
150	100	1.80	OMS150 (TH) <sup>1</sup>		23.0	173.0	1.80	2.20	0.38	0.77	0.99	18	65	105	155	141	2.4
175	130	1.50	OMB175		17.6	192.6	1.50	2.08	0.51	0.86	1.25	12	65	85	120	106	2.0
250	130	2.13	OMB250		23.3	273.3	2.13	2.96	0.51	1.21	1.77	18	65	120	155	141	2.8
250	100	3.00	OMS250.5 <sup>2</sup>		38.4	288.4	3.00	3.73	0.38	1.28	1.67	30	65	85	120	106	2.1
<b>High-pressure sodium</b>																	
50	85	0.76	OMS50-03	89001146	12.5	62.5	0.76	0.90	0.33	0.28	0.35	8	65	55	90	76	1.4
70	90	0.95	OMS70		15.2	85.2	0.94	1.15	0.36	0.38	0.49	10	70	55	90	76	1.4
70	90	1.00	OMSL70A-01 <sup>3</sup>	89001195	8.6	78.6	1.00	1.12	0.31	0.35	0.41	11	30	85	120	106	2.0
70	90	1.00	OMSL70A (TH) <sup>1</sup>	89002558	8.6	78.6	1.00	1.12	0.31	0.35	0.41	11	30	85	120	106	2.0
70	90	1.00	OMS70A-05	89001163	15.3	85.3	1.00	1.20	0.34	0.38	0.48	10	65	65	100	86	1.5
70	90	1.00	OMS70A (TH) <sup>1</sup>		15.3	85.3	1.00	1.20	0.34	0.38	0.48	10	65	65	100	86	1.5
100	100	1.20	OMS100-02	89001079	16.6	116.6	1.20	1.49	0.39	0.52	0.68	12	65	75	110	96	1.7
150	100	1.80	OMS150-11	89001103	21.5	171.5	1.80	2.20	0.38	0.76	0.98	18	60	105	155	141	2.4
150	100	1.80	OMS150 (TH) <sup>1</sup>		23.0	173.0	1.80	2.20	0.38	0.77	0.99	18	65	105	155	141	2.4
250	100	3.00	OMS250.5 <sup>2</sup>		38.4	288.4	3.00	3.73	0.38	1.28	1.67	30	65	85	120	106	2.1

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.

2. Split ballast, two required.

3. With multiple voltage tappings

Ballasts for other wattage ratings available on request.

## OG type ballasts

- vacuum impregnation
- very low noise level
- long service life
- glass fibre filled nylon coil covers
- 24A double-screw terminals
- winding insulation Class H materials
- fixed air gap ensuring permanent calibration
- tw150 winding temperature rating
- resistant to moisture and corrosion

### 100% final testing

- continuity
- winding short circuit
- insulation
- impedance



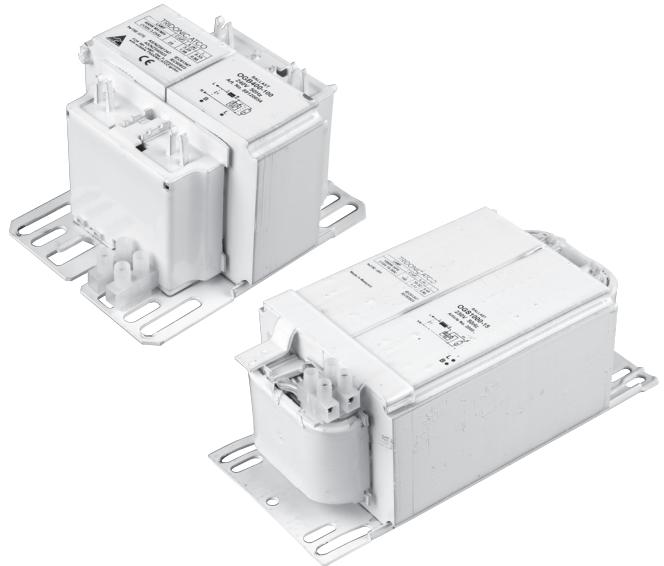


figure 1

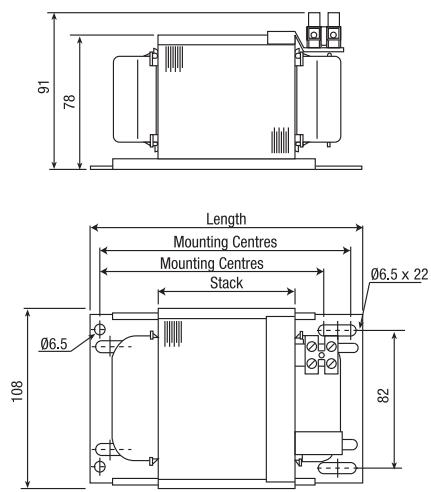

OG type ballasts with stack sizes 30-160 mm

figure 2

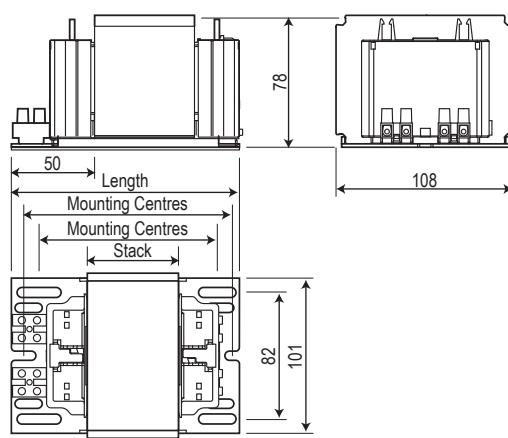

OG type ballasts with stack sizes 30-100 mm

**220 V 50 Hz – OG ballasts**

Lamp			Ballast		Electrical								Thermal		Physical			
wattage	voltage	current	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current	line start current	capacitor	winding	stack	figure	length	mtg centres	weight
W	V	A			W	W	A	A	cosφ	A@0.9PF	A@0.9PF	μF0.9PF	Δt	mm	mm	mm	kg	
<b>High-pressure mercury vapour</b>																		
250	130	2.13	OGB250-102	89120824	19	269	2.13	3.40	0.57	1.36	2.28	18	60	30	2	120	91-107	2.4
250	130	2.13	OGB250-08		19	269	2.13	3.40	0.57	1.36	2.28	18	60	30	1	110	81-97	2.4
250	130	2.13	OGB250/125 <sup>3</sup>		18	268	2.13	3.30	0.57	1.35	2.20	18	60	30	1	110	81-97	2.4
400	135	3.25	OGB400-125	89122648	26	426	3.25	5.30	0.60	2.15	3.68	25	70	40	2	130	101-117	3.1
400	135	3.25	OGB400-108		22	422	3.25	5.40	0.59	2.13	3.72	25	55	50	2	140	111-127	3.7
400	135	3.25	OGB400/250 <sup>3</sup>		24	424	3.25	5.10	0.59	2.14	3.53	25	70	50	1	120	91-107	3.7
700	140	5.40	OGB700-05		30	730	5.40	9.10	0.61	3.69	6.52	40	55	80	1	160	131-147	5.5
1,000	145	7.50	OGB1000-05	27020811	44	1,044	7.50	12.30	0.63	5.27	9.08	55	55	110	1	190	161-177	7.0
<b>Metal-halide</b>																		
150	100	1.80	OGS150-103		17	167	1.80	2.30	0.42	0.84	1.13	20	55	30	2	120	91-107	2.4
150	100	1.80	OGS150-110 (TH) <sup>1</sup>		17	167	1.80	2.30	0.42	0.84	1.13	20	55	30	2	120	91-107	2.4
250	130	2.13	OGB250-102	89120824	19	269	2.13	3.40	0.57	1.36	2.28	18	60	30	2	120	91-107	2.4
250	130	2.13	OGB250-08		19	269	2.13	3.40	0.57	1.36	2.28	18	60	30	1	110	81-97	2.4
250	100	3.00	OGS250-103	89121030	24	274	3.00	4.00	0.42	1.38	1.94	35	65	40	2	130	101-117	3.1
250	100	3.00	OGS250-108 (TH) <sup>1</sup>		24	274	3.00	4.00	0.42	1.38	1.94	35	65	40	2	130	101-117	3.1
400	135	3.25	OGB400-125	89122648	26	426	3.25	5.30	0.60	2.15	3.68	25	70	40	2	130	101-117	3.1
400	135	3.25	OGB400-108		22	422	3.25	5.40	0.59	2.13	3.72	25	55	50	2	140	111-127	3.7
400	120	3.50	OGH400-102	89120944	25	425	3.50	5.80	0.55	2.15	3.73	30	60	45	2	140	111-127	3.4
400	100	4.60	OGS400-102	89121082	34	434	4.60	6.70	0.43	2.19	3.35	50	65	60	2	150	121-137	4.3
400	100	4.60	OGS400-65		34	434	4.60	6.70	0.43	2.19	3.35	50	65	60	1	140	111-127	4.3
1,000	130	8.25	OGH1000-05	27020906	48	1,048	8.25	12.80	0.58	5.29	8.62	65	55	120	1	200	171-187	7.5
1,000	120	9.50	OGH1000A-06	27020917	62	1,062	9.50	14.00	0.51	5.36	8.30	85	70	120	1	200	171-187	7.5
<b>High-pressure sodium vapour</b>																		
150	100	1.80	OGS150-103		17	167	1.80	2.30	0.42	0.84	1.13	20	55	30	2	120	91-107	2.4
150	100	1.80	OGS150-110 (TH) <sup>1</sup>		17	167	1.80	2.30	0.42	0.84	1.13	20	55	30	2	120	91-107	2.4
250	100	3.00	OGS250-103	89121030	24	274	3.00	4.00	0.42	1.38	1.94	35	65	40	2	130	101-117	3.1
250	100	3.00	OGS250-108 (TH) <sup>1</sup>		24	274	3.00	4.00	0.42	1.38	1.94	35	65	40	2	130	101-117	3.1
250	100	3.00	OGS250/150-101 <sup>3</sup>	89121017	24	274	3.00	3.90	0.42	1.38	1.89	35	70	50	2	140	111-127	3.7
400	100	4.60	OGS400-102	89121082	34	434	4.60	6.70	0.43	2.19	3.35	50	65	60	2	150	121-137	4.3
400	100	4.60	OGS400-65		34	434	4.60	6.70	0.43	2.19	3.35	50	65	60	1	140	111-127	4.3
400	100	4.60	OGS400/250-101 <sup>3</sup>	89121071	34	434	4.60	6.20	0.43	2.19	3.10	50	60	70	2	160	131-147	4.9
600	110	6.20	OGS600-04		40	640	6.20	8.15	0.47	3.23	4.46	60	60	90	1	170	141-157	6.0
1,000	110	10.30	OGS1000-06	27020961	58	1,058	10.30	13.90	0.47	5.34	7.57	100	65	140	1	220	191-207	8.9
1,000	110	10.3	OGS1000-10 <sup>2</sup>	27020964	58	1058	10.3	13.9	0.47	5.34	7.57	100	65	140	1	220	191-207	8.9

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.

2. With multiple voltage tappings

3. With power tappings

Ballasts for other wattage ratings available on request.

**220 V 60 Hz – OG ballasts**

Lamp			Ballast		Electrical								Thermal		Physical			
wattage	voltage	current	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current	line start current	capacitor $\mu\text{F}$	winding $\Delta t$	stack mm	figure mm	length mm	mtg centres mm	weight kg
W	V	A			W	W	A	A	cos $\phi$	A@0.9PF	A@0.9PF	$\mu\text{F}0.9\text{PF}$		mm	mm	mm	kg	
<b>High-pressure mercury vapour</b>																		
250	130	2.13	OGB250-103		18	268	2.13	3.20	0.57	1.35	2.14	15	60	30	2	120	91-107	2.4
400	135	3.25	OGB400-104	89120858	25	425	3.25	5.90	0.59	2.15	4.09	25	70	30	2	120	91-107	2.4
400	135	3.25	OGB400-109	89120862	22	422	3.25	5.30	0.59	2.13	3.65	25	60	40	2	130	101-117	3.1
700	140	5.40	OGB700-06	27020898	33	733	5.40	8.40	0.62	3.70	6.05	35	60	70	1	150	121-137	5.0
1,000	145	7.50	OGB1000-04	27020810	43	1,043	7.50	12.10	0.63	5.27	8.89	45	55	100	1	190	151-167	6.5
<b>Metal-halide</b>																		
150	100	1.80	OGS150-104	89120994	17	167	1.80	2.20	0.42	0.84	1.08	16	55	30	2	120	91-107	2.4
250	130	2.13	OGB250-103		18	268	2.13	3.20	0.57	1.35	2.14	15	60	30	2	120	91-107	2.4
250	100	3.00	OGS250-104	89121031	25	275	3.00	4.20	0.42	1.39	2.04	30	65	30	2	120	91-107	2.4
250	100	3.00	OGS250-02		25	275	3.00	4.20	0.42	1.39	2.04	30	65	30	1	110	81-97	2.4
400	135	3.25	OGB400-104	89120858	25	425	3.25	5.90	0.59	2.15	4.09	25	70	30	2	120	91-107	2.4
400	135	3.25	OGB400-109	89120862	22	422	3.25	5.30	0.59	2.13	3.65	25	60	40	2	130	101-117	3.1
400	120	3.50	OGH400-103		26	426	3.50	5.55	0.55	2.15	3.58	25	70	40	2	130	101-117	3.1
400	120	3.50	OGH400-04		26	426	3.50	5.55	0.55	2.15	3.58	25	70	40	1	130	101-117	3.1
400	100	4.60	OGS400-103	89121083	34	434	4.60	6.20	0.43	2.19	3.10	40	65	50	2	140	111-127	3.7
1,000	130	8.25	OGH1000-03	27020905	48	1,048	8.25	12.90	0.58	5.29	8.69	55	60	100	1	180	151-167	6.5
1,000	120	9.50	OGH1000A-02	27020915	60	1,060	9.50	13.20	0.51	5.35	7.81	75	65	120	1	200	171-187	7.5
1,000	120	9.50	OGH1000A-16'	27020919	54	1054	9.50	13.2	0.50	5.32	7.77	75	55	140	1	243	232	8.9
<b>High-pressure sodium vapour</b>																		
150	100	1.80	OGS150-104	89120994	17	167	1.80	2.20	0.42	0.84	1.08	16	55	30	2	120	91-107	2.4
250	100	3.00	OGS250-104	89121031	25	275	3.00	4.20	0.42	1.39	2.04	30	65	30	2	120	91-107	2.4
250	100	3.00	OGS250-02		25	275	3.00	4.20	0.42	1.39	2.04	30	65	30	1	110	81-97	2.4
400	100	4.60	OGS400-103	89121083	34	434	4.60	6.20	0.43	2.19	3.10	40	65	50	2	140	111-127	3.7
600	110	6.20	OGS600-05	27021131	39	639	6.20	8.15	0.47	3.23	4.45	50	55	80	1	160	131-147	5.5
1,000	110	10.30	OGS1000-01	27020956	56	1,056	10.30	14.00	0.47	5.33	7.61	85	55	120	1	200	171-187	7.5

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.

2. With baseplate to suit D96 box

Ballasts for other wattage ratings available on request.

**230 V 50 Hz – OG ballasts**

Lamp			Ballast		Electrical								Thermal	Physical				
wattage	voltage	current	type	article number	loss hot W	input power W	lamp current A	lamp start current A	circuit PF cosφ	line current A@0.9PF	line start current A@0.9PF	capacitor μF0.9PF	winding Δt	stack mm	figure mm	length mm	mtg centres mm	weight kg
<b>High-pressure mercury vapour</b>																		
250	130	2.13	OGB250-104		20	270	2.13	3.20	0.55	1.30	2.06	18	65	30	2	120	91-107	2.4
400	135	3.25	OGB400-105		27	427	3.25	5.20	0.57	2.06	3.47	25	70	40	2	130	101-117	3.1
400	135	3.25	OGB400-107		23	423	3.25	5.10	0.57	2.04	3.37	25	60	50	2	140	111-127	3.7
700	140	5.40	OGB700-04		32	732	5.40	8.80	0.59	3.54	6.05	40	60	80	1	160	131-147	5.5
1,000	145	7.50	OGB1000-02		48	1,048	7.50	11.90	0.61	5.06	8.43	55	60	110	1	190	161-177	7.0
<b>Metal-halide</b>																		
150	100	1.80	OGS150-105	89120995	18	168	1.80	2.30	0.41	0.81	1.09	18	60	30	2	120	91-107	2.4
150	100	1.80	OGS150 TH <sup>1</sup>	89003641	18	168	1.80	2.30	0.41	0.81	1.09	18	60	30	2	120	91-107	2.4
250	130	2.13	OGB250-104		20	270	2.13	3.20	0.55	1.30	2.06	18	65	30	2	120	91-107	2.4
250	133	2.10	OGH250-101PS <sup>1,2</sup>	89003532	19	269	2.10	3.22	0.56	1.30	2.09	18	60	30	2	130	101-117	2.4
250	100	3.00	OGS250-105	89121032	25	275	3.00	3.90	0.40	1.33	1.81	35	65	40	2	130	101-117	3.1
250	100	3.00	OGS250 TH <sup>1</sup>	89003595	25	275	3.00	3.90	0.40	1.33	1.81	35	65	40	2	130	101-117	3.1
300	133	2.45	OGH300-103PS <sup>1,2</sup>	89003638	20	320	2.45	3.75	0.57	1.55	2.48	20	65	40	2	130	101-117	3.1
320	135	2.63	OGH320-103PS <sup>1,2</sup>	89003637	23	343	2.63	3.96	0.57	1.66	2.62	20	55	40	2	130	101-117	3.1
350	135	2.80	OGH350-103PS <sup>1,2</sup>	89003530	28	378	2.80	4.40	0.59	1.83	3.01	25	60	40	2	130	101-117	3.1
400	135	3.25	OGB400-105		27	427	3.25	5.20	0.57	2.06	3.47	25	70	40	2	130	101-117	3.1
400	135	3.25	OGB400-107		23	423	3.25	5.10	0.57	2.04	3.37	25	60	50	2	140	111-127	3.7
400	120	3.50	OGH400-101	89120943	25	425	3.50	5.55	0.53	2.05	3.42	30	60	45	2	140	111-127	3.4
400	135	3.20	OGH400-101W <sup>1,2</sup>	89003521	28	428	3.20	4.95	0.58	2.07	3.36	25	60	40	2	130	101-117	3.1
400	135	3.20	OGH400/250-101W <sup>1,2,3</sup>	89003634	26	426	3.20	4.96	0.58	2.06	3.35	25	50	60	2	140	111-127	4.3
400	100	4.60	OGS400-104	89121084	35	435	4.60	6.10	0.41	2.10	2.93	50	65	60	2	150	121-137	4.3
400	100	4.60	OGS400 TH <sup>1</sup>	89003596	35	435	4.60	6.10	0.41	2.10	2.93	50	65	60	2	150	121-137	4.3
1,000	130	8.25	OGH1000-07		50	1,050	8.25	12.60	0.55	5.07	8.13	65	55	120	1	200	171-187	7.5
1,000	130	8.25	OGH1000-27	27022646	50	1050	8.25	12.6	0.55	5.07	8.13	65	55	120	1	220	191-207	7.5
1,000	120	9.50	OGH1000A-03		63	1,063	9.50	14.10	0.49	5.14	8.00	85	70	120	1	200	171-187	7.5
<b>High-pressure sodium vapour</b>																		
150	100	1.80	OGS150-105	89120995	18	168	1.80	2.30	0.41	0.81	1.09	18	60	30	2	120	91-107	2.4
150	100	1.80	OGS150 TH <sup>1</sup>	89003641	18	168	1.80	2.30	0.41	0.81	1.09	18	60	30	2	120	91-107	2.4
250	100	3.00	OGS250-105	89121032	25	275	3.00	3.90	0.40	1.33	1.81	35	65	40	2	130	101-117	3.1
250	100	3.00	OGS250 TH <sup>1</sup>	89003595	25	275	3.00	3.90	0.40	1.33	1.81	35	65	40	2	130	101-117	3.1
400	100	4.60	OGS400-104	89121084	35	435	4.60	6.10	0.41	2.10	2.93	50	65	60	2	150	121-137	4.3
400	100	4.60	OGS400 TH <sup>1</sup>	89003596	35	435	4.60	6.10	0.41	2.10	2.93	50	65	60	2	150	121-137	4.3
600	110	6.20	OGS600-03		42	642	6.20	8.25	0.45	3.10	4.33	60	65	90	1	170	141-157	6.0
1,000	110	10.3	OGS1000-10 <sup>2</sup>	27020964	60	1,060	10.30	14.10	0.45	5.12	7.36	100	65	140	1	220	191-207	8.9
1,000	110	10.30	OGS1000-15		60	1,060	10.30	14.10	0.45	5.12	7.36	100	65	140	1	220	191-207	8.9

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.

2. With multiple voltage tappings

3. With power tappings

Ballasts for other wattage ratings available on request.

## 240 V 50 Hz – OG ballasts

Lamp			Ballast		article number	Electrical							Thermal	Physical					
wattage	voltage	current	type			loss hot W	input power W	lamp current A	lamp start current A	circuit PF cosΦ	line current A@0.9PF	line start current A@0.9PF	capacitor μF0.9PF	winding Δt	stack mm	figure	length mm	mtg centres mm	weight kg
<b>High-pressure mercury vapour</b>																			
250	130	2.13	OGB250-100	89120822	21	271	2.13	3.10	0.53	1.25	1.92	18	65	30	2	120	91-107	2.4	
250	130	2.13	OGB250	27002334	21	271	2.13	3.10	0.53	1.25	1.92	18	65	30	1	110	81-97	2.4	
250	130	2.13	OGB250/125 <sup>5</sup>		20	270	2.13	3.10	0.53	1.25	1.91	18	60	30	1	110	81-97	2.4	
400	135	3.25	OGB400-100	89120854	29	429	3.25	5.00	0.55	1.99	3.21	25	75	40	2	130	101-117	3.1	
400	135	3.25	OGB400	27020845	29	429	3.25	5.00	0.55	1.99	3.21	25	75	40	1	120	91-107	3.1	
400	135	3.25	OGB400-106		24	424	3.25	4.90	0.54	1.96	3.11	25	65	50	2	140	111-127	3.7	
400	135	3.25	OGB400-114	89120867	22	422	3.25	4.90	0.54	1.95	3.09	25	55	60	2	150	121-137	4.3	
400	135	3.25	OGB400/250 <sup>5</sup>	27020846	27	427	3.25	4.90	0.55	1.98	3.13	25	70	50	1	120	91-107	3.7	
700	140	5.40	OGB700	27020895	34	734	5.40	9.00	0.57	3.40	5.95	40	60	80	1	160	131-147	5.3	
700	140	5.40	OGB700 <sup>3</sup>		34	734	5.40	9.00	0.57	3.40	5.95	40	60	80	1	160	131-147	5.3	
1,000	145	7.50	OGB1000	27020808	41	1,041	7.50	12.00	0.58	4.82	8.10	55	65	120	1	200	171-187	7.5	
<b>Metal-halide</b>																			
150	100	1.80	OGS150-100	89120990	18	168	1.80	2.20	0.39	0.78	1.00	18	60	30	2	120	91-107	2.4	
150	100	1.80	OGS150-102 (TH) <sup>1</sup>	89120992	18	168	1.80	2.20	0.39	0.78	1.00	18	60	30	2	120	91-107	2.4	
150	100	1.80	OGS150-108	89120996	14	164	1.80	2.10	0.38	0.76	0.93	18	45	50	2	140	111-127	3.7	
250	130	2.13	OGB250-100	89120822	21	271	2.13	3.10	0.53	1.25	1.92	18	65	30	2	120	91-107	2.4	
250	130	2.13	OGB250	27002334	21	271	2.13	3.10	0.53	1.25	1.92	18	65	30	1	110	81-97	2.4	
250	133	2.10	OGH250-101PS <sup>1,4</sup>	89003532	21	271	2.10	3.15	0.54	1.25	1.98	18	60	30	2	130	101-117	2.4	
250	100	3.00	OGS250-100	89121027	26	276	3.00	3.90	0.38	1.28	1.74	30	70	40	2	130	101-117	3.1	
250	100	3.00	OGS250	27021015	26	276	3.00	3.90	0.38	1.28	1.74	30	70	40	1	120	91-107	3.1	
250	100	3.00	OGS250-102 (TH) <sup>1</sup>		26	276	3.00	3.90	0.38	1.28	1.74	30	70	40	2	130	101-117	3.1	
250	100	3.00	OGS250-45 <sup>6</sup>	27021715	26	276	3.00	3.90	0.38	1.28	1.74	30	70	40	1	120	91-107	3.1	
250	100	3.00	OGS250-107		22	272	3.00	3.70	0.38	1.26	1.63	30	60	50	2	140	111-127	3.7	
300	133	2.45	OGH300-103PS <sup>1,4</sup>	89003638	22	322	2.45	3.68	0.55	1.49	2.35	20	65	40	2	130	101-117	3.1	
320	135	2.63	OGH320-103PS <sup>1,4</sup>	89003637	25	345	2.63	3.90	0.55	1.60	2.49	20	55	40	2	130	101-117	3.1	
350	135	2.80	OGH350-103PS <sup>1,4</sup>	89003530	30	380	2.80	4.30	0.57	1.76	2.84	25	60	40	2	130	101-117	3.1	
350	135	2.80	OGH350-05	27022851	30	380	2.80	4.30	0.57	1.76	2.84	25	60	40	1	120	91-107	3.1	
400	135	3.25	OGB400-100	89120854	29	429	3.25	5.00	0.55	1.99	3.21	25	75	40	2	130	101-117	3.1	
400	135	3.25	OGB400	27020845	29	429	3.25	5.00	0.55	1.99	3.21	25	75	40	1	120	91-107	3.1	
400	135	3.25	OGB400-106		24	424	3.25	4.90	0.54	1.96	3.11	25	65	50	2	140	111-127	3.7	
400	135	3.25	OGB400-114	89120867	22	422	3.25	4.90	0.54	1.95	3.09	25	55	60	2	150	121-137	4.3	
400	120	3.50	OGH400-100	89120942	27	427	3.50	5.60	0.51	1.98	3.32	30	65	45	2	140	111-127	3.4	
400	135	3.20	OGH400-101W <sup>1,4</sup>	89003521	30	430	3.20	4.88	0.56	1.99	3.19	25	60	40	2	130	101-117	3.1	
400	135	3.20	OGH400/250-101W <sup>1,4,5</sup>	89003634	28	428	3.20	4.88	0.56	1.98	3.17	25	50	60	2	140	111-127	4.3	
400	100	4.60	OGS400-100	89121080	37	437	4.60	6.10	0.40	2.02	2.82	45	70	60	2	150	121-137	4.3	
400	100	4.60	OGS400-109 (TH) <sup>1</sup>		37	437	4.60	6.10	0.40	2.02	2.82	45	70	60	1	120	91-107	4.3	
400	100	4.60	OGS400-52 <sup>6</sup>	27021697	37	437	4.60	6.10	0.40	2.02	2.82	45	70	60	1	120	91-107	4.3	
400	100	4.60	OGS400-106	89121086	34	434	4.60	5.80	0.39	2.01	2.66	45	60	70	2	160	131-147	4.9	
400	100	4.60	OGS400-29	27021110	31	431	4.60	5.80	0.39	2.00	2.64	45	60	80	1	120	91-107	5.3	
400	100	4.60	OGLIS 400 C042W <sup>1</sup>	27002445	31	431	4.60	5.80	0.39	2.00	2.64	45	60	80	1	120	91-107	5.3	
1,000	130	8.25	OGH1000	27020903	53	1,053	8.25	12.10	0.53	4.88	7.51	65	60	120	1	200	171-187	7.5	
1,000	130	8.25	OGH1000 <sup>3</sup>	27022684	53	1053	8.25	12.1	0.53	4.88	7.51	65	60	120	1	200	171-187	7.5	
1,000	130	8.25	OGH1000-16 <sup>2,3</sup>	27022681	53	1053	8.25	12.1	0.53	4.88	7.51	65	60	120	1	243	232	7.5	
1,000	120	9.50	OGH1000A	27020913	64	1,064	9.50	13.00	0.47	4.93	7.05	85	70	140	1	220	191-207	8.9	
1,000	120	9.50	OGH1000A-07 <sup>6</sup>	27020918	64	1064	9.50	13.0	0.47	4.93	7.05	85	70	140	1	220	191-207	8.9	
1,000	120	9.50	OGH1000A-11 <sup>2,6</sup>	27022683	64	1064	9.50	13.0	0.47	4.93	7.05	85	70	140	1	243	232	8.9	
1,000	120	9.50	OGHS1000	27022884	57	1057	9.50	13.1	0.46	4.89	7.09	85	70	140	1	220	191-207	8.9	

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.

2. With baseplate to suit D96 box

3. With flying leads

4. With multiple voltage tappings

5. With power tappings

6. With ignitor tap suitable for use with ATIG-16 or ZRM 4000 powerPULSE ignitor

7. With ignitor tap suitable for use with ATIG-11 or ZRM 4000 powerPULSE ignitor

Ballasts for other wattage ratings available on request.

**240 V 50 Hz – OG ballasts**

Lamp			Ballast		Electrical								Thermal		Physical			
wattage	voltage	current	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current	line start current	capacitor	winding	stack	figure	length	mtg centres	weight
W	V	A			W	W	A	A	cos	A@0.9PF	A@0.9PF	μF0.9PF	Δt	mm	mm	mm	kg	
<b>High-pressure sodium vapour</b>																		
150	100	1.80	OGS150-100	89120990	18	168	1.80	2.20	0.39	0.78	1.00	18	60	30	2	120	91-107	2.4
150	100	1.80	OGS150-102 (TH) <sup>1</sup>	89120992	18	168	1.80	2.20	0.39	0.78	1.00	18	60	30	2	120	91-107	2.4
150	100	1.80	OGS150-108	89120996	14	164	1.80	2.10	0.38	0.76	0.93	18	45	50	2	140	111-127	3.7
250	100	3.00	OGS250-100	89121027	26	276	3.00	3.90	0.38	1.28	1.74	30	70	40	2	130	101-117	3.1
250	100	3.00	OGS250	27021015	26	276	3.00	3.90	0.38	1.28	1.74	30	70	40	1	120	91-107	3.1
250	100	3.00	OGS250-102 (TH) <sup>1</sup>		26	276	3.00	3.90	0.38	1.28	1.74	30	70	40	2	130	101-117	3.1
250	100	3.00	OGS250-45 <sup>7</sup>	27021715	26	276	3.00	3.90	0.38	1.28	1.74	30	70	40	1	120	91-107	3.1
250	100	3.00	OGS250-107		22	272	3.00	3.70	0.38	1.26	1.63	30	60	50	2	140	111-127	3.7
250	100	3.00	OGS250/150-100 <sup>5</sup>		28	278	3.00	3.70	0.39	1.29	1.67	30	70	50	2	140	111-127	3.7
400	100	4.60	OGS400-100	89121080	37	437	4.60	6.10	0.40	2.02	2.82	45	70	60	2	150	121-137	4.3
400	100	4.60	OGS400-109 (TH) <sup>1</sup>		37	437	4.60	6.10	0.40	2.02	2.82	45	70	60	2	150	121-137	4.3
400	100	4.60	OGS400-52 <sup>7</sup>	27021697	37	437	4.60	6.10	0.40	2.02	2.82	45	70	60	1	120	91-107	4.3
400	100	4.60	OGS400-106	89121086	34	434	4.60	5.80	0.39	2.01	2.66	45	60	70	2	160	131-147	4.9
400	100	4.60	OGS400-29		31	431	4.60	5.80	0.39	2.00	2.64	45	60	80	1	120	91-107	5.3
400	100	4.60	OGLIS 400 C042W <sup>1</sup>	27002445	31	431	4.60	5.80	0.39	2.00	2.64	45	60	80	1	120	91-107	5.3
400	100	4.60	OGS400/250-100 <sup>5</sup>	89121070	37	437	4.60	5.80	0.40	2.02	2.68	45	60	70	2	160	131-147	4.9
600	110	6.20	OGS600-100	89122873	45	645	6.20	8.00	0.43	2.99	4.05	60	70	80	2	160	131-147	5.3
600	110	6.20	OGS600	27021127	41	641	6.20	8.00	0.43	2.97	4.02	60	70	90	1	170	141-157	6.0
600	110	6.20	OGS600-106	89122883	41	641	6.20	8.00	0.43	2.97	4.02	60	65	90	1	180	151-167	6.0
600	110	6.20	OGS600-10 <sup>7</sup>	27022673	41	641	6.20	8.00	0.43	2.97	4.02	60	65	90	1	140	111-127	6.0
660	140	5.40	OGS660	27021138	32	692	5.40	8.00	0.53	3.20	4.98	45	65	80	1	160	131-147	5.3
940	145	7.50	OGS940 <sup>3</sup>	27021141	41	981	7.50	12.0	0.55	4.54	7.63	60	65	120	1	220	191-207	7.5
940	145	7.50	OGS940-02 <sup>3</sup>	27021143	41	981	7.50	12.0	0.55	4.54	7.63	60	65	120	1	200	171-187	7.5
940	145	7.50	OGS940-06 <sup>2,3</sup>	27022676	41	981	7.50	12.0	0.55	4.54	7.63	60	65	120	1	243	232	7.5
1,000	110	10.30	OGS1000	27020955	60	1,060	10.30	13.10	0.43	4.91	6.55	95	75	140	1	220	191-207	8.9
1,000	110	10.3	OGS1000-23 <sup>2,3</sup>		60	1060	10.3	13.1	0.43	4.91	6.55	95	75	140	1	243	232	8.9
1,000	110	10.3	OGS1000-11 <sup>7</sup>	27020965	60	1060	10.3	13.1	0.43	4.91	6.55	95	75	140	1	220	191-207	8.9
1,000	110	10.3	OGS1000-18 <sup>2,7</sup>	27022667	60	1060	10.3	13.1	0.43	4.91	6.55	95	75	140	1	243	232	8.9
1,000	110	10.3	OGHS1000	27022884	60	1060	10.3	13.1	0.43	4.91	6.55	95	75	140	1	220	191-207	8.9

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.
  2. With baseplate to suit D96 box
  3. With flying leads
  4. With multiple voltage tappings
  5. With power tappings
  6. With ignitor tap suitable for use with ATIG-16 or ZRM 4000 powerPULSE ignitor
  7. With ignitor tap suitable for use with ATIG-11 or ZRM 4000 powerPULSE ignitor
- Ballasts for other wattage ratings available on request.

**250 V 50 Hz – OG ballasts**

Lamp			Ballast		Electrical								Thermal		Physical			
wattage	voltage	current	type	article number	loss hot	input power	lamp current	lamp start current	circuit PF	line current	line start current	capacitor $\mu\text{F}$	winding $\Delta t$	stack mm	figure	length mm	mtg centres mm	weight kg
W	V	A			W	W	A	A	cosφ	A@0.9PF	A@0.9PF	$\mu\text{F}0.9\text{PF}$		mm		mm	mm	kg
<b>High-pressure mercury vapour</b>																		
250	130	2.13	OGB250-112	89120829	23.5	273.5	2.13	3.02	0.51	1.22	1.81	18	65	30	2	120	91-107	2.4
250	130	2.13	OGB250-05	27020817	23.5	273.5	2.13	3.02	0.51	1.22	1.81	18	65	30	1	110	81-97	2.4
250	130	2.13	OGB250-23		15.0	265.0	2.13	3.01	0.50	1.18	1.75	18	55	50	1	120	91-107	3.7
400	135	3.25	OGB400-112	89120866	31.0	431.0	3.25	4.69	0.53	1.92	2.90	25	75	40	2	130	101-117	3.1
400	135	3.25	OGB400-09	27020852	31.0	431.0	3.25	4.69	0.53	1.92	2.90	25	75	40	1	120	91-107	3.1
400	135	3.25	OGB400-30	27020882	20.5	420.5	3.25	4.69	0.52	1.87	2.83	25	60	60	1	140	111-127	4.3
700	140	5.40	OGB700-01		33.5	733.5	5.40	7.75	0.54	3.26	4.91	40	60	80	1	160	131-147	5.3
<b>Metal-halide</b>																		
150	100	1.80	OGS150-109	89120997	18.5	168.5	1.80	2.21	0.37	0.75	0.97	18	60	30	2	120	91-107	2.4
150	100	1.80	OGS150-09	27020988	18.5	168.5	1.80	2.21	0.37	0.75	0.97	18	60	30	1	110	81-97	2.4
250	130	2.13	OGB250-112	89120829	23.5	273.5	2.13	3.02	0.51	1.22	1.81	18	65	30	2	120	91-107	2.4
250	130	2.13	OGB250-05	27020817	23.5	273.5	2.13	3.02	0.51	1.22	1.81	18	65	30	1	110	81-97	2.4
250	130	2.13	OGB250-23		15.0	265.0	2.13	3.01	0.50	1.18	1.75	18	55	50	1	120	91-107	3.7
250	100	3.00	OGS250-109	89121036	27.0	277.0	3.00	3.65	0.37	1.23	1.57	30	70	40	2	130	101-117	3.1
250	100	3.00	OGS250-04		21.0	271.0	3.00	3.67	0.36	1.20	1.55	30	60	60	1	140	111-127	4.3
400	135	3.25	OGB400-112	89120866	31.0	431.0	3.25	4.69	0.53	1.92	2.90	25	75	40	2	130	101-117	3.1
400	135	3.25	OGB400-09	27020852	31.0	431.0	3.25	4.69	0.53	1.92	2.90	25	75	40	1	120	91-107	3.1
400	135	3.25	OGB400-30	27020882	20.5	420.5	3.25	4.69	0.52	1.87	2.83	25	65	60	1	140	111-127	4.3
400	100	4.60	OGS400-112		36.0	436.0	4.60	5.53	0.38	1.94	2.45	45	70	60	2	150	121-137	4.3
400	100	4.60	OGS400-09	27021078	36.5	436.5	4.60	5.59	0.38	1.94	2.48	45	75	60	1	140	111-127	4.3
400	100	4.60	OGS400-22	27022692	33.5	433.5	4.60	5.54	0.38	1.93	2.44	45	65	80	1	120	91-107	5.3
1,000	130	8.25	OGH1000-10		51.5	1,051.5	8.25	11.30	0.51	4.67	6.72	65	60	140	1	220	191-207	8.9
1,000	130	8.25	OGH1000-22 <sup>23</sup>		51.5	1052	8.25	11.30	0.51	4.67	6.72	65	60	140	1	243	232	8.9
<b>High-pressure sodium vapour</b>																		
150	100	1.80	OGS150-109	89120997	18.5	168.5	1.80	2.21	0.37	0.75	0.97	18	60	30	2	120	91-107	2.4
150	100	1.80	OGS150-09	27020988	18.5	168.5	1.80	2.21	0.37	0.75	0.97	18	60	30	1	110	81-97	2.4
250	100	3.00	OGS250-109	89121036	27.0	277.0	3.00	3.65	0.37	1.23	1.57	30	70	40	2	130	101-117	3.1
250	100	3.00	OGS250-04		21.0	271.0	3.00	3.67	0.36	1.20	1.55	30	60	60	1	140	111-127	4.3
400	100	4.60	OGS400-112		36.0	436.0	4.60	5.53	0.38	1.94	2.45	45	70	60	2	150	121-137	4.3
400	100	4.60	OGS400-09	27021078	36.5	436.5	4.60	5.59	0.38	1.94	2.48	45	75	60	1	140	111-127	4.3
400	100	4.60	OGS400-22	27022692	33.5	433.5	4.60	5.54	0.38	1.93	2.44	45	65	80	1	120	91-107	5.3
1,000	110	10.30	OGS1000-02		55.0	1,055.0	10.20	12.60	0.41	4.69	6.08	95	75	140	1	220	191-207	8.9
1,000	110	10.30	OGS1000-42 <sup>24</sup>		55.0	1,055.0	10.20	12.60	0.41	4.69	6.08	95	75	140	1	220	191-207	8.9

## notes

1. Ballasts have built-in thermal cutout devices specifically for short-arc metal-halide lamps.
  2. With baseplate to suit D96 box
  3. With flying leads
  4. With ignitor tap suitable for use with ATIG-11 or ZRM 4000 powerPULSE ignitor
- Ballasts for other wattage ratings available on request.

## OM PAK assemblies

The CMP remote gear assembly incorporates the ballast, ignitor and capacitor in a compact housing; able to fit through 100 mm diameter ceiling openings, common for metal halide downlights. It is suitable for a range of lamps up to and including 250 W.

### Features

- easy installation
- high quality moulded housing
- non-audible noise level
- ambient temperature rating up to 40°C
- power factor corrected to 0.9
- automatic resetting thermal cut-out metal halide control gear
- integral mounting facilities / cable clamps
- superimposed pulse ignitor
- screw terminals for hard-wiring applications

### Applications

- indoor applications – remote mounted

Typical configurations are

- 50 W to 125 W high-pressure mercury vapour lamps
- 35 W to 150 W metal halide lamps
- 35 W to 150 W high pressure sodium vapour lamps

### Optional extras include


- multi-voltage tapped ballasts
- other supply voltages available on request

### 100% final testing




OM PAK A614

OM PAK A014

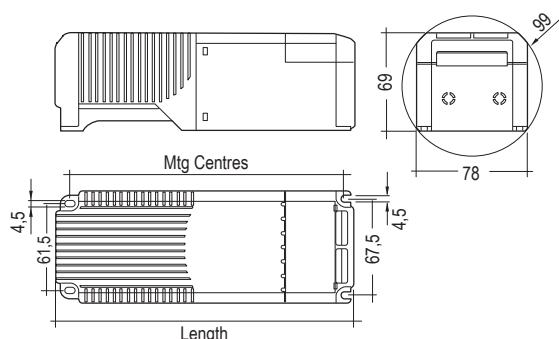

### Standard specification key

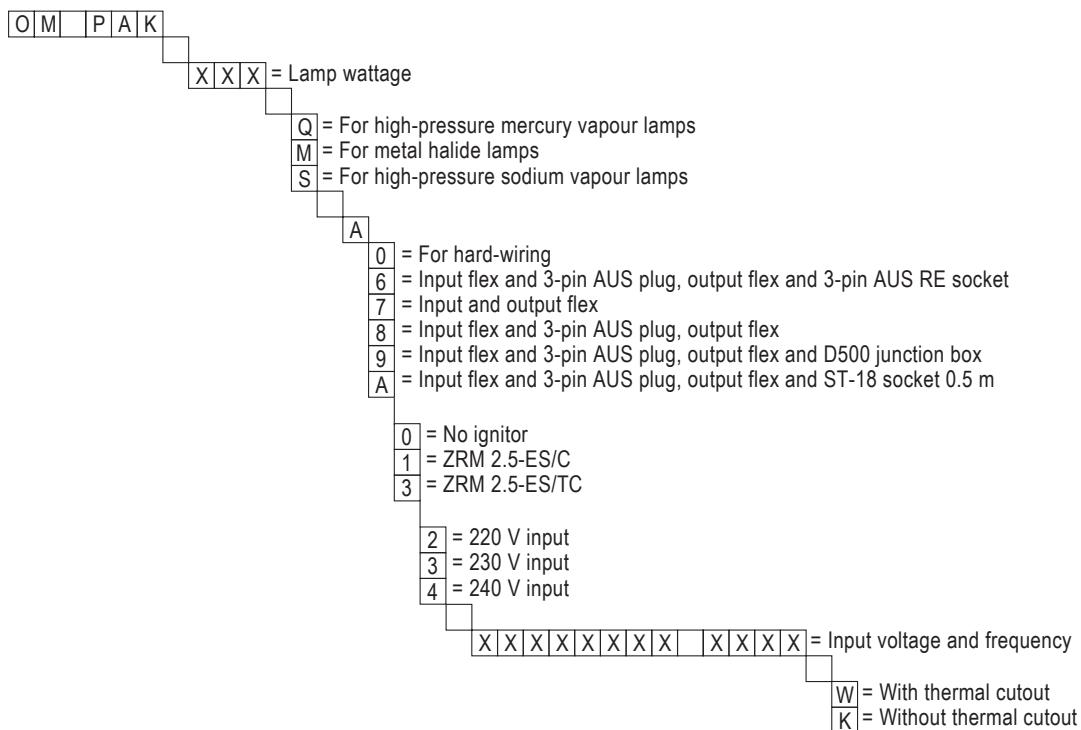

**OM PAK assemblies**

Lamp			Control gear		article number	Electrical						max. amb. temperature °C	length mm	mtg centres	weight kg	carton qty						
wattage W	voltage V	current A	type	loss hot W	input power W	lamp current A	lamp start current A	line current A@0.9PF	line start current A@0.9PF													
220 V 50 Hz																						
<b>Metal halide and High-pressure sodium vapour lamps</b>																						
35	85	0.53	OM PAK 35 M A712 220V 50HZ W		8	43	0.53	0.65	0.22	0.28	40	210	193.0	1.4	4							
220 V 60 Hz																						
<b>Metal halide and High-pressure sodium vapour lamps</b>																						
35	85	0.53	OM PAK 35 M A712 220V 60HZ W		8	43	0.53	0.65	0.22	0.28	40	210	193.0	1.4	4							
70	90	1.00	OM PAK 70 M A712 220V 60HZ K		13	83	1.00	1.45	0.42	0.64	40	210	193.0	1.8	4							
150	100	1.80	OM PAK 150 M A712 220V 60HZ W		20.5	170.5	1.80	2.26	0.86	1.14	40	260	243.5	2.6	3							
230 V 50 Hz																						
<b>Metal halide and High-pressure sodium vapour lamps</b>																						
150	100	1.80	OM PAK 150 M A713 230V 50HZ W		21.5	171.5	1.80	2.39	0.83	1.16	40	260	243.5	2.6	3							
240 V 50 Hz																						
<b>High-pressure mercury vapour lamps</b>																						
50	95	0.61	OM PAK 50 Q A604 240V 50HZ K		9	59	0.61	0.76	0.27	0.36	40	210	193.0	1.4	4							
80	115	0.80	OM PAK 80 Q A604 240V 50HZ K		13.5	93.5	0.80	1.33	0.43	0.76	40	210	193.0	1.4	4							
125	125	1.15	OM PAK 125 Q A604 240V 50HZ K		15.5	140.5	1.15	1.90	0.65	1.13	40	210	193.0	1.8	4							
250	130	2.13	OM PAK 250 Q A604 240V 50HZ K		24.5	274.5	2.13	3.60	1.27	2.26	40	260	243.5	2.6	3							
<b>Metal halide lamps</b>																						
100	100	1.10	OM PAK 100 M A614 240V 50HZ W	89002914	14	114	1.10	1.40	0.53	0.71	40	210	193.0	1.8	4							
100	100	1.10	OM PAK 100 M A634 240V 50HZ W	89003613	14	114	1.10	1.40	0.53	0.71	40	210	193.0	1.8	4							
<b>Metal halide and High-pressure sodium vapour lamps</b>																						
35	85	0.53	OM PAK 35 M A014 240V 50HZ K	89003610	9	44	0.53	0.60	0.20	0.24	40	210	193.0	1.4	4							
35	85	0.53	OM PAK 35 M A614 240V 50HZ W	89002912	9	44	0.53	0.60	0.20	0.24	40	210	193.0	1.4	4							
35	85	0.53	OM PAK 35 M A634 240V 50HZ W	89003309	9	44	0.53	0.60	0.20	0.24	40	210	193.0	1.4	4							
35	85	0.53	OM PAK 35 M AA34 240V 50HZ W	89003651	9	44	0.53	0.60	0.20	0.24	40	210	193.0	1.4	4							
70	90	1.00	OM PAK 70 M A014 240V 50HZ K 1	89003484	16	86	1.00	1.22	0.40	0.51	40	210	193.0	1.5	4							
70	90	1.00	OM PAK 70 M A014 240V 50HZ W 1	89002860	16	86	1.00	1.22	0.40	0.51	40	210	193.0	1.5	4							
70	90	1.00	OM PAK 70 M A034 240V 50HZ W 1	89002910	16	86	1.00	1.22	0.40	0.51	40	210	193.0	1.5	4							
70	90	1.00	OM PAK 70 M A614 240V 50HZ W 1	89002862	16	86	1.00	1.22	0.40	0.51	40	210	193.0	1.8	4							
70	90	1.00	OM PAK 70 M A634 240V 50HZ W 1	89002913	16	86	1.00	1.22	0.40	0.51	40	210	193.0	1.8	4							
70	90	1.00	OM PAK 70 M AA34 240V 50HZ W 1	89003652	16	86	1.00	1.22	0.40	0.51	40	210	193.0	1.8	4							
150	100	1.80	OM PAK 150 M A014 240V 50HZ K	89003485	22.5	172.5	1.80	2.35	0.80	1.09	40	260	243.5	2.3	4							
150	100	1.80	OM PAK 150 M A014 240V 50HZ W	89002861	22.5	172.5	1.80	2.35	0.80	1.09	40	260	243.5	2.3	4							
150	100	1.80	OM PAK 150 M A034 240V 50HZ W	89002911	22.5	172.5	1.80	2.35	0.80	1.09	40	260	243.5	2.3	4							
150	100	1.80	OM PAK 150 M A604 240V 50HZ W		22.5	172.5	1.80	2.35	0.80	1.09	40	260	243.5	2.6	3							
150	100	1.80	OM PAK 150 M A614 240V 50HZ W	89002863	22.5	172.5	1.80	2.35	0.80	1.09	40	260	243.5	2.6	3							
150	100	1.80	OM PAK 150 M A634 240V 50HZ W	89002915	22.5	172.5	1.80	2.35	0.80	1.09	40	260	243.5	2.6	3							
150	100	1.80	OM PAK 150 M AA34 240V 50HZ W	89003653	22.5	172.5	1.80	2.35	0.80	1.09	40	260	243.5	2.6	3							

## notes

Control gear for other voltage, frequency and wattage ratings available on request.

1. Double-ended high-pressure sodium vapour lamps with ignition voltage 4.0 - 5.0 kV

## Gear tray assemblies

Standard gear tray assemblies are available to suit a large range of lamps. The smaller gear tray is also designed to fit the standard D430 enclosure.

### Features

- zinc sealed steel
- folded sides for mechanical strength and to provide clearances for component fasteners, such as nuts, screws and rivets (stand-off height - 12 mm)
- provision for two position mounting

### Applications

- switchboard type cubicles
- base of light poles for street or sports lighting



### Typical configurations are

- 80 W to 1,000 W high-pressure mercury vapour lamps
- 70 W to 2,000 W metal halide lamps
- 70 W to 1,000 W high-pressure sodium vapour lamps


### Optional extras include

- HRC fuses
- blocking inductors
- ignitors – subject to mounting distance from lamp
- multi-voltage tapped ballasts

### 100% final testing

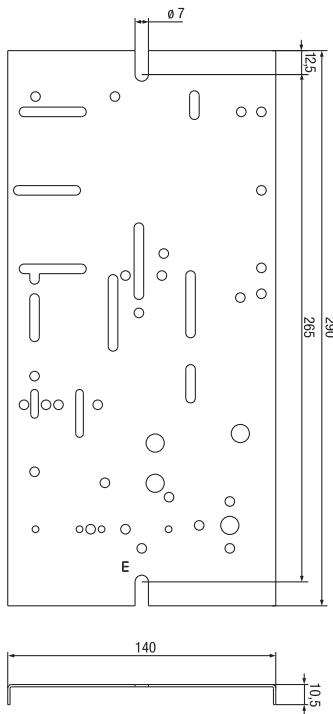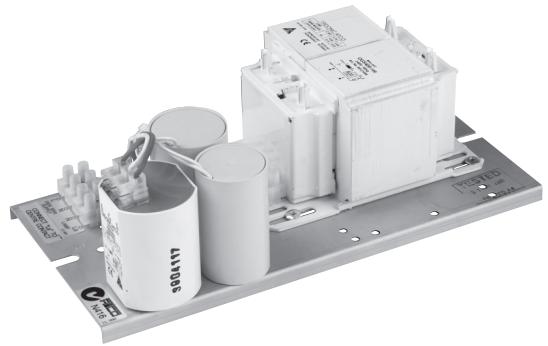

Gear tray to fit D430 box

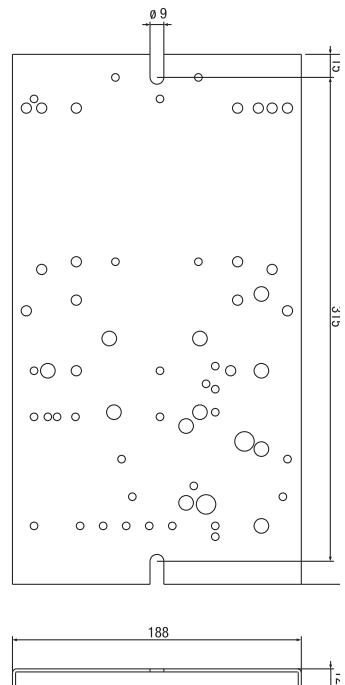

Gear tray for other applications

**Gear tray assemblies**

Lamp			Control gear		article number	Electrical						max. amb. temperature ° C	Thermal			Physical		
wattage W	voltage V	current A	type			loss hot W	input power W	lamp current A	lamp start current A	line current A@0.9PF	line start current A@0.9PF		length mm	mtg centres	weight kg	carton qty		

240 V 50 Hz

**High-pressure mercury vapour lamps**

80	115	0.80	MV80GT		9.5	89.5	0.80	1.11	0.414	0.604	40	290	265	2	1
125	125	0.53	MV125GT		12	137	1.15	1.66	0.634	0.961	40	290	265	2	1
250	130	2.13	MV250GT		21	271	2.13	3.10	1.250	1.920	40	290	265	3	1
400	135	3.25	MV400GT-2	89120752	29	429	3.25	5.00	1.990	3.210	40	290	265	4	1

**Metal halide lamps**

175	130	1.50	MH175GT		16	191	1.50	2.29	0.884	1.420	40	290	265	3.0	1
250	130	2.13	MH250GT		21	271	2.13	3.10	1.250	1.920	40	290	265	3.5	1
400	135	3.25	MH400GT	89120726	29	429	3.25	5.00	1.990	3.210	40	290	265	4.0	1
1,000	130	8.25	MH1000GT-01	89120704	53	1,053	8.25	12.10	4.880	7.510	40	345	315	9.0	1
1,000	120	9.5	MH1000AGT-02	89121928	64	1,064	9.50	13.00	4.930	7.080	40	345	315	10.0	1
1,000	265	4.20	CWMH1000GT	89120217	79	1,079	4.20	5.82	4.700	2.100	40	345	315	13.5	1
1,500	500	3.30	CWBL1500GT	89120139	120	1,620	3.30	5.00	6.800	3.000	40	345	315	20.5	1
2,000	135	16.5	MH2000LGT	89120431	77	2,077	16.50	25.10	9.620	15.400	40	345	315	17.5	1

**High-pressure sodium vapour lamps**

70	90	1.00	HS70AGT		14	84	1.00	1.16	0.389	0.474	40	290	265	2.5	1
150	100	1.80	HS150GT		18	168	1.80	2.20	0.778	1.000	40	290	265	3.5	1
250	100	3.00	HS250GT		26	276	3.00	3.90	1.280	1.740	40	290	265	4.0	1
400	100	4.60	HS400GT		37	437	4.60	6.10	2.020	2.820	40	290	265	5.5	1
1,000	110	10.30	HS1000GT-01	89120557	60	1,060	10.30	13.10	4.910	6.550	40	345	315	10.0	1
1,000	250	4.70	CWHS1000GT-2	89120168	92	1,092	4.70	6.80	4.640	3.000	40	345	315	20.5	1

415 V 50 Hz

**Metal halide lamps**

1,000	265	4.20	CWMH1000GT-4	89120222	79	1,079	4.20	5.82	4.700	2.100	40	345	315	14.0	1
1,500	500	3.30	CWBL1500GT-4-01	89120143	120	1,620	3.30	5.00	6.800	3.000	40	345	315	20.5	1
2,000	205	11.30	MH2000DGT-01 400/415/430V 50Hz	89120406	98	2,048	11.30	14.60	5.480	7.440	40	345	315	17.5	1
2,000	230	10.30	MH2000DGT-01 400/415/430V 50Hz	89120406	85	2,085	10.30	14.60	5.580	8.310	40	345	315	17.5	1
2,000	245	8.80	MH2000GT	89120424	80	2,080	8.80	13.50	5.570	9.000	40	345	315	16.5	1

**High-pressure sodium vapour lamps**

1,000	250	4.70	CWHS1000GT-4-SP1	89120173	95	2,045	4.70	6.80	2.700	1.600	40	345	315	21.0	1
-------	-----	------	------------------	----------	----	-------	------	------	-------	-------	----	-----	-----	------	---

## notes

Control gear for other voltage, frequency and wattage ratings available on request.

## D430 weatherproof assemblies

The D430 cast aluminium box is a heavy duty IP65 rated enclosure intended for either wall or pole mounting. The box has provision for 2 x 20 mm conduit entries.

### Features

- cast aluminium alloy 401
- mounting strap - aluminium alloy 6063 or similar.
- weatherproof seal - neoprene rubber gasket
- tamperproof stainless steel allen key screw lid fastener
- deep lid providing easy access to the control gear for quick connection and troubleshooting

### Applications

- primarily used to house lighting control gear but is also suitable for transformers, swimming pool controls, alarms, contactors, thermostats and the like

### Typical configurations are

- 80 W to 400 W high-pressure mercury vapour lamps
- 70 W to 400 W metal halide lamps
- 70 W to 400 W high-pressure sodium vapour lamps

In some instances an economical solution can be offered by using the D430 enclosure to accommodate two complete sets of control gear, bearing in mind there are thermal limitations depending on lamp wattage.



### Optional extras include

- HRC fuses
- blocking inductors
- ignitors - subject to mounting distance from lamp
- multi-voltage tapped ballasts

### 100% final testing



D430 weatherproof (IP65) enclosure

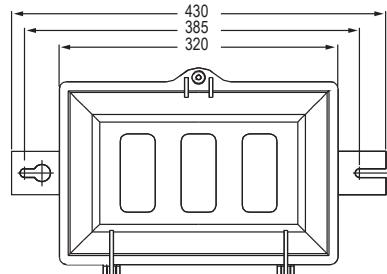

**D430 weatherproof assemblies**

Lamp			Control gear		Electrical						Thermal		Physical			
wattage	voltage	current	type	article number	loss hot W	input power W	lamp current A	lamp start current A	line current A@0.9PF	line start current A@0.9PF	max. amb. temperature °C	length mm	mtg centres mm	weight kg	carton qty	
W	V	A														
240 V 50 Hz																
<b>High-pressure mercury vapour lamps</b>																
80	115	0.80	MV80D430		9.5	89.5	0.80	1.11	0.414	0.604	40	430	385	3.5	1	
125	125	0.53	MV125D430		12	137	1.15	1.66	0.634	0.961	40	430	385	3.5	1	
250	130	2.13	MV250D430		21	271	2.13	3.10	1.250	1.920	40	430	385	4.5	1	
400	135	3.25	MV400D430		29	429	3.25	5.00	1.990	3.210	40	430	385	5.5	1	
<b>Metal halide lamps</b>																
175	130	1.50	MH175D430		16	191	1.50	2.29	0.884	1.420	40	430	385	4.5	1	
250	130	2.13	MH250D430		21	271	2.13	3.10	1.250	1.920	40	430	385	5.0	1	
400	135	3.25	MH400D430		29	429	3.25	5.00	1.990	3.210	40	430	385	5.5	1	
<b>High-pressure sodium vapour lamps</b>																
70	90	1.00	HS70AD430		14	84	1.00	1.16	0.389	0.474	40	430	385	4.0	1	
150	100	1.80	HS150D430		18	168	1.80	2.20	0.778	1.000	40	430	385	5.0	1	
250	100	3.00	HS250D430		26	276	3.00	3.90	1.280	1.740	40	430	385	5.5	1	
400	100	4.60	HS400D430	89120577	37	437	4.60	6.10	2.020	2.820	40	430	385	7.0	1	

## notes

Control gear for other voltage, frequency and wattage ratings available on request.

## D96 weatherproof assemblies

The D96 cast aluminium box is a heavy duty IP65 rated enclosure designed and developed in Australia for harsh environmental conditions. It is intended for either wall or pole mounting and has provision for 3 x 20 mm conduit entries. The clever compartmental design allows the operation of two 1,000 W control gear in a single enclosure at high ambient temperatures.

### Features

- die-cast aluminium alloy
- mounting strap - aluminium alloy 6063 or similar
- weatherproof seal - neoprene rubber gasket
- tamperproof stainless steel allen key screw lid fastener
- deep lid providing easy access to the control gear for quick connection and troubleshooting

### Typical configurations are

- 400 W to 1,000 W high-pressure mercury vapour lamps
- 400 W to 2,000 W metal halide lamps
- 400 W to 1,000 W high-pressure sodium vapour lamps

Twin control gear configurations are also available in the one D96 enclosure offering an economical solution for floodlighting applications.


### Optional extras include

- HRC fuses
- blocking inductors
- ignitors - subject to mounting distance from lamp
- multi-voltage tapped ballasts
- step dimming (bi-level switching)

### 100% final testing



D96 weatherproof (IP65) enclosure

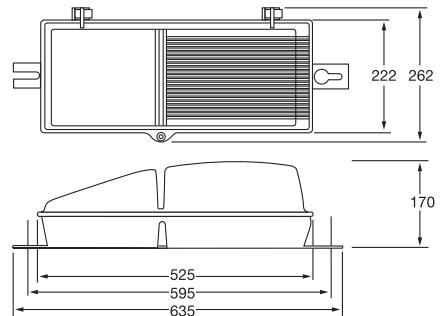

**D96 weatherproof assemblies**

Lamp			Control gear		article number	Electrical					max. amb. temperature °C	Thermal			Physical		
wattage W	voltage V	current A	type			loss hot W	input power W	lamp current A	lamp start current A	line current A@0.9PF	line start current A@0.9PF	length mm	mtg centres	weight kg	carton qty		

220 V 60 Hz

**Metal halide lamps**

1,000	120	9.50	MH1000AD96-11	89120668	60	1,060	9.50	13.20	4.91	7.16	45	635	595	14.5	1
-------	-----	------	---------------	----------	----	-------	------	-------	------	------	----	-----	-----	------	---

240 V 50 Hz

**Metal halide lamps**

400	135	3.25	MH400D96	89122879	29	429	3.25	5.00	1.99	3.21	45	635	595	9.5	1
400	135	3.25	MH2X400D96		58	858	6.50	10.00	3.97	6.42	45	635	595	12.5	1
400	135	3.25	CWMH400D96		58	458	3.25	3.73	2.00	0.80	45	635	595	13.5	1
1,000	130	8.25	MH1000D96	89120694	53	1,053	8.25	12.10	4.88	7.51	45	635	595	14.5	1
1,000	120	9.50	MH1000AD96-12	89120689	64	1,064	9.50	13.00	4.93	7.08	45	635	595	15.5	1
1,000	75	15.00	CSI1000D96	89120378	90	1,090	15.00	16.80	4.90	5.90	40	635	595	22.5	1
1,000	265	4.20	CWMH1000D96	89120212	79	1,079	4.20	5.82	4.70	2.10	40	635	595	19.0	1
1,500	265	6.30	CWMH1500D96	89120232	136	1,636	6.30	8.80	7.10	4.50	35	635	595	27.0	1
2,000	135	16.50	MH2000LD96-05	89120430	77	2,077	16.50	25.10	9.62	15.40	40	635	595	23.0	1

**High-pressure sodium vapour lamps**

400	100	4.60	HS2X400D96		74	874	9.20	12.20	4.05	5.63	45	635	595	15.5	1
400	100	4.60	CWHS400D96		70	470	4.60	5.60	2.04	1.15	40	635	595	16.5	1
600	110	6.20	HS2X600D96		90	1,290	12.40	16.00	5.97	8.09	40	635	595	18.0	1
1,000	110	10.30	HS1000D96	89120547	60	1,060	10.30	13.10	4.91	6.55	45	635	595	15.5	1
1,000	110	10.30	HS2X1000D96		120	2,120	20.60	26.20	9.81	13.11	40	635	595	25.5	1
1,000	250	4.70	CWHS1000D96	89120161	92	1,092	4.70	6.80	4.64	3.00	40	635	595	26.0	1

380 V 60 Hz

**Metal halide lamps**

2,000	205	11.30	MH2000DD96-15	89121675	90	2,040	11.30	15.80	5.46	8.02	40	635	595	23.0	1
2,000	230	10.30	MH2000DD96-15	89121675	78	2,078	10.30	15.80	5.56	8.96	40	635	595	23.0	1

415 V 50 Hz

**Metal halide lamps**

400	135	3.25	CWMH400D96-4		63	463	3.25	3.73	1.16	0.50	45	635	595	14.5	1
1,000	265	4.20	CWMH1000D96-4	89120216	79	1,079	4.20	5.82	4.70	2.10	40	635	595	19.5	1
1,500	265	6.30	CWMH1500D96-01	89120233	136	1,636	6.30	8.80	7.10	4.50	35	635	595	27.0	1
1,500	500	3.30	CWBL1500D96-04	89120135	120	1,620	3.30	5.00	6.80	3.00	35	635	595	26.0	1
2,000	205	11.30	MH2000DD96-06	89120398	98	2,048	11.30	14.60	5.48	7.44	40	635	595	23.0	1
2,000	230	10.30	MH2000DD96-06	89120398	85	2,085	10.30	14.60	5.58	8.31	40	635	595	23.0	1
2,000	235	9.60	MH2000D96-12	89121809	78	2,078	9.60	14.30	5.56	8.70	40	635	595	23.5	1
2,000	245	8.80	MH2000D96	89120385	80	2,080	8.80	13.50	5.57	9.00	40	635	595	22.0	1

**High-pressure sodium vapour lamps**

1,000	250	4.70	CWHS1000D96-4		95	2,045	4.70	6.80	2.70	1.60	40	635	595	26.5	1
-------	-----	------	---------------	--	----	-------	------	------	------	------	----	-----	-----	------	---

**notes**

Control gear for other voltage, frequency and wattage ratings available on request.



Index	page
<b>Capacitors</b>	93
<b>CP parallel lighting capacitors</b>	
280 V capacitors	96
440 V capacitors	97
Mounting accessories	98
<b>Blocking inductors for HPF lighting circuits</b>	99



## Power factor

For a pure resistive load in an electrical circuit, the voltage (V) and current (I) are in phase with each other and the overall power factor ( $\cos \phi$ ) has a value of unity. It can also be said that the average power (P) of the resistive circuit is equal to the apparent power (S), ie.  $P = V \times I$ .

However, in a pure reactive electrical circuit, there is no resistive component, the voltage and current are  $90^\circ$  out of phase, ie.  $\cos \phi = 0$ .

Electrical circuits containing a combination of both resistive and reactive elements display both average power and apparent power components.

Power factor is therefore the ratio by which the apparent power is multiplied in order to obtain the average power actually being consumed in the circuit, ie.  $P = V \times I \times \cos \phi$ .


For example, a power factor of 0.5 indicates that the circuit has a reactive component having a phase angle of  $+60^\circ$  or  $-60^\circ$ .

In common practice most loads are inductive and therefore the current lags the voltage (lagging power factor), whereas a typical capacitive load has a leading power factor.


The major causes of low power factor in a circuit are lightly loaded electric motor and discharge lamp circuits in which the inductance of the control equipment, such as ballasts, results in a power factor usually in the range of 0.3 to 0.5.

When a capacitor is connected across an inductive load, it cancels the lagging effect of the inductance, increasing the power factor closer to unity.

figure 1

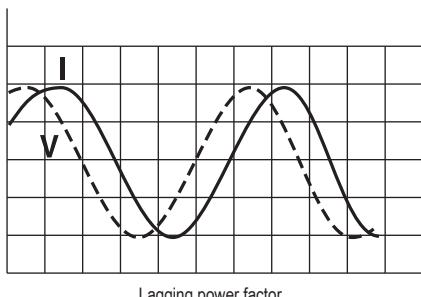

Lagging power factor

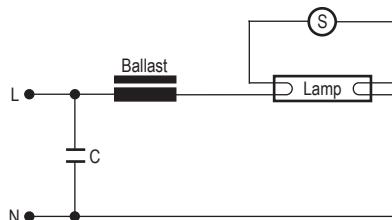

Fluorescent lamp circuit with parallel power factor correction capacitor.

## Fluorescent and HID lamp circuits

Fluorescent and HID lamp circuits have an inherent low power factor (around 0.4 to 0.5), due to the control gear inductance. The inductance is in the circuit to limit the current through the lamp, however, in lighting installations where many lamps are used, high input current increases the cost of mains reticulation.

Raising the power factor by means of the inclusion of a capacitor (opposite effect to an inductor) substantially reduces the current drawn from the mains, giving improvement in the reticulation efficiency, which in turn enables a reduction in copper wire size and transformer sizes (the generating equipment).


Most power distribution authorities have a requirement of high power factor (HPF) for lighting installations of generally 0.85 to 0.95 minimum.

A typical discharge lighting circuit without power factor correction, eg. 400 W high pressure sodium, has a power factor of approximately 0.4. Figure 1 shows the relationship of current and voltage in this application.


This power factor characteristic can be corrected to approximately 0.9 by adding a capacitor (leading) to the lagging line current to cancel the phase shift. Figure 2 illustrates this.

In common application therefore, by connecting a capacitor into the lighting circuit, the power factor can be improved to the values normally prescribed by the Regulatory Authorities so that practically inductance free operation results.

figure 2

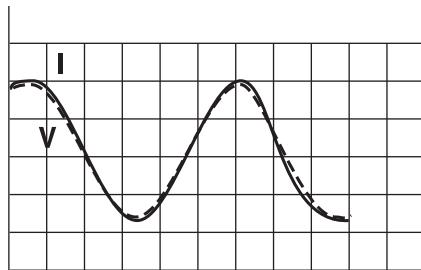

Power factor corrected

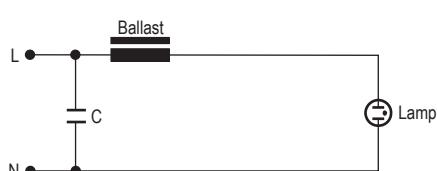

HID lamp circuit with parallel power factor correction capacitor.

# Capacitors


## Features of metallised polypropylene

### Low capacitance loss

Polypropylene is an extremely efficient dielectric. The losses (or heating effects) are mainly restricted to internal connections and electrode resistance.

The temperature rise is typically about 1 °C. This means that higher ambient temperatures can be reached without the risk of thermal runaway.

$\Delta C/C\%$

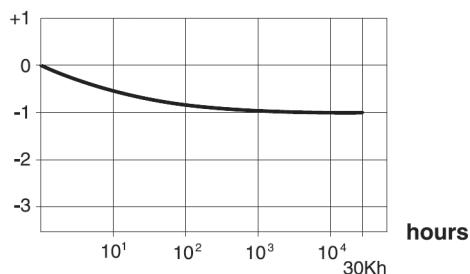


Capacitance versus Time  
under normal working conditions

### Self healing

The capacitor electrodes of a metallised polypropylene capacitor are thin layers of metal deposited on to the polypropylene under vacuum.

An isolated dielectric breakdown within the capacitor windings is "repaired" by vapourisation of the metal deposits around the "fault" area. The capacitor remains unchanged except for an insignificant capacitance loss.

$\Delta C/C\%$

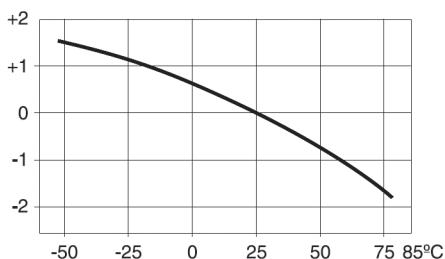


Capacitance versus Temperature

### High insulation resistance

Some special applications demand high insulation resistance which can be satisfied with a metallised polypropylene capacitor. This means that the capacitor is capable of holding an electric charge for long periods. Resistance values are typically greater than 1,000MΩ.

$\Delta C/C\%$

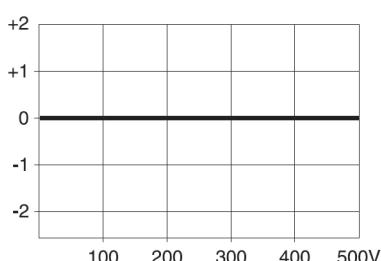

Capacitance versus Voltage

# Capacitors

## Quality

Assured quality of capacitors is first and foremost and cannot be compromised. CMP uses accepted IEC and BSI Standards as the minimum measure of quality.

All CMP capacitors are manufactured in accordance to Australian and International Standards assuring the customer of the highest quality.

Capacitors shall not be mounted in the close vicinity of heat sources (such as conventional ballasts, lamps, etc.) as high ambient temperatures may cause premature ageing. Every 10 °C above the limiting temperature at the surface of the capacitor case will halve its service life.

The capacitors have been designed for continuous operation at the rated voltage marked on the label. Operating the capacitor 5 % above the rated voltage will result in a 35 % decrease in its service life.

## Service life

The quality of the raw materials, the manufacturing technique and processes and the operating conditions determine the service life of the capacitor.

In accordance with relevant applicable standards, the stated operating life of a capacitor allows for a limited degradation of the capacitance of up to 10 % and a failure rate of up to 3 %. To demonstrate this performance there are a series of prescribed tests, which includes thermal cycling, application of voltage at elevated temperatures where the duration of this test at elevated voltage simulates the equivalent of 30,000hr operation.

Thermal stress above the limiting temperature of the capacitor, voltages above the rating of the capacitor, harmonic distortion and excessive humidity can have an influence on the service life expectancy or cause premature failures.



## CP 2 – 45 µF

Supply voltage up to 250 V

### Product description


- Can: Aluminium
- Self healing polypropylene winding film
- Filling material: Liquid, based on vegetable oil, non-PCB
- Protection class: B, with overpressure protection
- Max. operating temperature of case: 100 °C
- Test class: 40/100/21
- Discharge resistor: yes, < 50 V within < 60 s
- Conforming with IEC/EN 61048 and IEC/EN 61049

For product data sheet go to [www.cmpcontrols.com](http://www.cmpcontrols.com), or available on request



### Technical data

Rated supply voltage	280 V
Mains frequency	50 / 60 Hz
Capacitor tolerance	±5 %
Operating temperature	-40 ... +100 °C
Push-in terminal	0.5 – 1.5 mm <sup>2</sup> for rigid wires

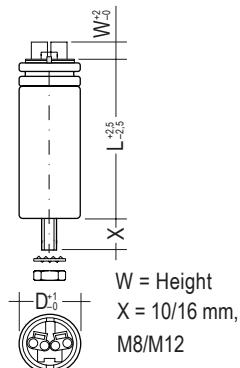

### Ordering data

Weight	Packaging, carton	Type	Article number
0.036 kg	98 pieces	CP 2.0 280V P2 AL 25x48 PI M8 OIL	09100621
0.037 kg	98 pieces	CP 4.0 280V P2 AL 25x48 PI M8 OIL	09100625
0.043 kg	98 pieces	CP 6.0 280V P2 AL 25x58 PI M8 OIL	09100622
0.047 kg	98 pieces	CP 8.0 280V P2 AL 25x68 PI M8 OIL	09100623
0.054 kg	98 pieces	CP 10.0 280V P2 AL 25x78 PI M8 OIL	09100624
0.050 kg	72 pieces	CP 12.0 280V P2 AL 30x58 PI M8 OIL	09100613
0.090 kg	50 pieces	CP 18.0 280V P2 AL 35x78 PI M8 OIL	09100615
0.090 kg	50 pieces	CP 20.0 280V P2 AL 35x78 PI M8 OIL	09100616
0.110 kg	36 pieces	CP 25.0 280V P2 AL 40x78 PI M8 OIL	09100617
0.110 kg	36 pieces	CP 30.0 280V P2 AL 40x93 PI M8 OIL	09100618
0.110 kg	36 pieces	CP 35.0 280V P2 AL 40x93 PI M8 OIL	09100619
0.200 kg	32 pieces	CP 45.0 280V P2 AL 45x119 PI M8 OIL	09100620

### Specific technical data

Capacity	Type	Article number	Mounting	Diameter d	Length L	Height
2 µF	CP 2.0 280V P2 AL 25x48 PI M8 OIL	09100621	M8	25	48 mm	22 mm
4 µF	CP 4.0 280V P2 AL 25x48 PI M8 OIL	09100625	M8	25	48 mm	22 mm
6 µF	CP 6.0 280V P2 AL 25x58 PI M8 OIL	09100622	M8	25	58 mm	22 mm
8 µF	CP 8.0 280V P2 AL 25x68 PI M8 OIL	09100623	M8	25	68 mm	22 mm
10 µF	CP 10.0 280V P2 AL 25x78 PI M8 OIL	09100624	M8	25	78 mm	22 mm
12 µF	CP 12.0 280V P2 AL 30x58 PI M8 OIL	09100613	M8	30	58 mm	20 mm
18 µF	CP 18.0 280V P2 AL 35x78 PI M8 OIL	09100615	M8	35	78 mm	16 mm
20 µF	CP 20.0 280V P2 AL 35x78 PI M8 OIL	09100616	M8	35	78 mm	16 mm
25 µF	CP 25.0 280V P2 AL 40x78 PI M8 OIL	09100617	M8	40	78 mm	16 mm
30 µF	CP 30.0 280V P2 AL 40x93 PI M8 OIL	09100618	M8	40	93 mm	16 mm
35 µF	CP 35.0 280V P2 AL 40x93 PI M8 OIL	09100619	M8	40	93 mm	16 mm
45 µF	CP 45.0 280V P2 AL 45x119 PI M8 OIL	09100620	M8	45	119 mm	16 mm



## CP 20 – 50 µF

Supply voltage up to 440 V

### Product description


- Can: Aluminium
- Self healing polypropylene winding film
- Filling material: Liquid, based on vegetable oil, non-PCB
- Protection class: B, with overpressure protection
- Max. operating temperature of case: 85 °C
- Test class: 25/85/21
- Discharge resistor: yes, < 50 V within < 60 s
- Conforming with IEC/EN 61048 and IEC/EN 61049

For product data sheet go to [www.cmpcontrols.com](http://www.cmpcontrols.com), or available on request



### Technical data

Rated supply voltage	440 V
Mains frequency	50 / 60 Hz
Capacitor tolerance	±5 %
Operating temperature	-25 ... +85 °C
Push-in terminal	0.5 – 1.5 mm <sup>2</sup> for rigid wires

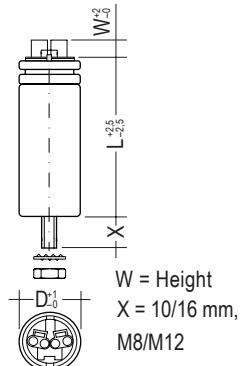

### Ordering data

Weight	Packaging, carton	Packaging, pallet	Type	Article number
0.287 kg	21 pieces	1,890 pieces	CP 20.0 440V P2 AL 40x093 PI M8 OIL	0910019
0.173 kg	36 pieces	3,240 pieces	CP 25.0 440V P2 AL 40x119 PI M8 OIL	09100188
0.175 kg	36 pieces	3,600 pieces	CS 30.0-02 30.0 UF 440V S1	09100101
0.800 kg	32 pieces	960 pieces	CS 35.0-02 35.0 UF 440V RE S1	09100103
0.224 kg	32 pieces	3,200 pieces	CP 40.0 440V P2 AL 45x119 PI M8 OIL	09100104
0.253 kg	21 pieces	1,890 pieces	CS 45.0-07 45.0 UF 440V RE S1	09100075
0.287 kg	21 pieces	1,890 pieces	CS 50.0-07 50.0 UF 440V RE S1	09100106

### Specific technical data


Capacity	Type	Article number	Mounting	Diameter d	Length L	Height
20 µF	CP 20.0 440V P2 AL 40x093 PI M8 OIL	0910019	M8	40	93 mm	16 mm
25 µF	CP 25.0 440V P2 AL 40x119 PI M8 OIL	09100188	M8	40	119 mm	16 mm
30 µF	CS 30.0-02 30.0 UF 440V S1	09100101	M8	40	119 mm	16 mm
35 µF	CS 35.0-02 35.0 UF 440V RE S1	09100103	M8	45	119 mm	16 mm
40 µF	CP 40.0 440V P2 AL 45x119 PI M8 OIL	09100104	M8	45	119 mm	16 mm
45 µF	CS 45.0-07 45.0 UF 440V RE S1	09100075	M12	50	124 mm	16 mm
50 µF	CS 50.0-07 50.0 UF 440V RE S1	09100106	M12	50	124 mm	16 mm

Capacitor mounting accessories


Right angle mounting bracket, Article number 09000932  
\* Cat. No. 60067



Clip, Article number 09006767  
\* Cat. No. 60071  
\* For 30-35 mm diameter capacitors  
\* To suit 7 mm diameter hole, 0.50-0.53 mm metal thickness



Clip, Article number 09000933  
\* Cat. No. 60072  
\* For 40-45 mm diameter capacitors




## Blocking inductors for HPF lighting circuits

Blocking inductors are used to stop high frequency signals from being excessively attenuated by shunt power factor correction capacitors. Such signals are superimposed on the mains network in certain areas to switch meter tariffs and loads.

The blocking inductor must match the capacitor size to work correctly. To make selection easier, the description contains the suitable capacitor size in  $\mu\text{F}$ , eg. BE12 is suitable for a 12 $\mu\text{F}$  capacitor.


### Product description

- supply voltage frequency: 240V to 250V 50Hz
- blocking frequency: 750Hz to 1,050Hz
- series resonance frequency: 320Hz nominal
- maximum capacitor tolerance: +10% -5%
- terminals: screw

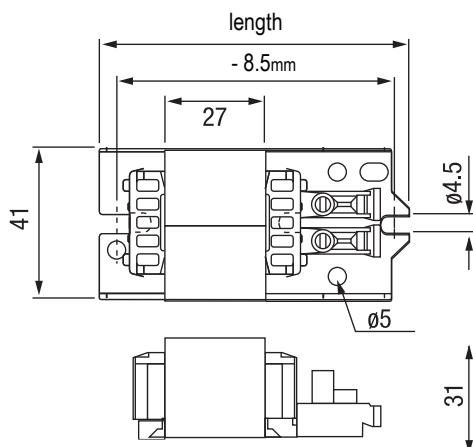


### Ordering data

Weight	Length(mm)	Packaging, carton	Type	Article number
0.330 kg	110	36 pieces	BE 4	89000706
0.330 kg	110	36 pieces	BE 8	89000715
0.330 kg	110	36 pieces	BE 9	89000716
0.330 kg	110	36 pieces	BE10-02	20888387
0.330 kg	85	40 pieces	BE11-01	89000692
0.330 kg	110	36 pieces	BE 12	89000693
0.330 kg	110	36 pieces	BE 18	89000697
0.330 kg	85	40 pieces	BE20-01	89002745
0.330 kg	110	36 pieces	BE 25	89000700
0.330 kg	110	36 pieces	BE 30	89000705
0.330 kg	110	36 pieces	BE35-02	20888286
0.330 kg	110	36 pieces	BE 40	89000708
0.330 kg	110	36 pieces	BE 45	89000709

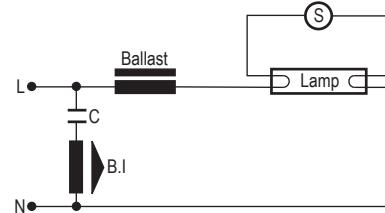

Fluorescent lamp circuit with power factor correction capacitor and blocking inductor.

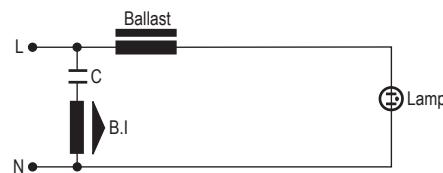

HID lamp circuit with power factor correction capacitor and blocking inductor.



Index	page
<b>Magnetic transformers for low-voltage halogen lamps</b>	103
<b>Technical tips for low-voltage lighting circuits</b>	105
<b>Magnetic transformers</b>	
ECT transformers, 20-100 VA 50/60 Hz	106
OMT transformers, 25-200 VA 50/60 Hz	107
OGT transformers, 180-1200 VA 50/60 Hz	108
<b>Enclosed magnetic transformers</b>	
LVL (D427) indoor transformers, 65-200 VA 50/60 Hz	109
LVL (D490) weatherproof transformers, 50-200 VA 50/60 Hz	110
LVL 48 below ground transformers, 50-200 VA 50/60 Hz	111
LVL (D600) indoor transformers, 250-650 VA 50/60 Hz	112



## Magnetic transformers for low-voltage halogen lamps

In principle, operation of low-voltage halogen lamps, which are universally popular for accent lighting, requires a transformer which adapts the mains voltage to a 12V operating voltage. All transformers also ensure that the protective measures required by relevant standards are met, for instance in the event of a short-circuit or voltage interruption.



Magnetic transformers are a rugged, extremely affordable solution offering long service life together with excellent thermal endurance.

CMP's diversified range of units for integration in luminaires and remote-mounted applications covers all relevant uses. The transformers guarantee operation of lamps in accordance with specifications, thereby enabling lamps to achieve their maximum luminous flux and service life.

Essentially, all CMP magnetic transformers are characterised by minimal power consumption, compact winding, optimised dimensions and high-quality materials. They are continuously controllable using phase-control dimmers for inductive loads.

### Designed for long service life

Thanks to their high-quality insulating material, coil form and the quality of the copper wire used, ECT, OMT and OGT open type transformers for integration in luminaires and LVL enclosed types for remote-mounted applications achieve a maximum service life of approximately 100,000 hours of operation, i.e. roughly 10 years of continuous operation with a winding temperature of 130°C. The winding temperature is calculated from the ambient temperature and the temperature increase due to intrinsic consumption. An upward or downward change in temperature of 10°C causes halving or doubling of the life of the unit respectively.

The transformers can be protected on the line side either by a time-delay fuse or by a built-in current-sensitive thermal cutout appropriate to the transformer type. Protection on the secondary side against over load and short-circuit trips if the lamp becomes faulty.

### **Consistent high quality**

Certified to ISO 9001, the production process and equipment guarantee a consistent high quality standard. All finished goods are 100% end of line tested and only the highest quality raw materials are used.

### **Protection and approval**

It is mandatory under the Australian and New Zealand wiring rules that transformers for remote mounting are housed in a suitable enclosure and as a prescribed item must be approved by the Statutory Authority to AS/NZS 61558. The approval number must be clearly marked on the enclosure.

The enclosed transformer must be located in the installation in a position where it is easily accessible for inspection and maintenance.

The transformer enclosure and wiring to the light fitting must have adequate ventilation. If the wiring and the transformer enclosure are covered with building insulation material then substantial derating and overheating may occur.

### **The specialist for integrated applications**


ECT magnetic transformers are characterised by especially compact dimensions (31 x 42 mm) and an excellent price/performance ratio. This model is available with power ratings from 20 to 100 VA.

OMT transformers are compactly designed units of reduced length. The device has a cross-sectional area of 65 x 47 mm. Thanks to its high efficiency, the OMT model, which is available in versions from 25 to 200 VA, is also suitable for use at relatively high ambient temperatures.

OGT transformers reveal their full potential in situations where several lamps are connected. Power ratings range from 180 to 1,200VA versions.

## Technical tips for low-voltage lighting circuits

Symptom	Possible fault	Test and remedy
Lamp appears to be intact but will not light	Failed lamp	Replace lamp
	Supply fault	Check supply volts and circuit fuse or breaker
	Wiring fault	Check for loose connections on input and output of transformer and the lampholder connections
	Transformer fault	Check output voltage of transformer, if no voltage measured, substitute transformer
Blowing fuses or tripping circuit breakers	Short circuit	Disconnect secondary at the transformer and re-energise the circuit. Should short circuit re-occur immediately (fuse blows), then try substituting the transformer. If short circuit does not immediately re-occur then replace the secondary wiring and/or the light fitting.
Lamp cycling on/off	Loose connection	Check for loose connection at supply source on primary and secondary connections of the transformer and also at the lamp
	Poor contact in lamp holder	Check the lamp contact condition and if necessary replace lampholder
	Transformer cycling	Check that transformer is installed in a ventilated area on a flat surface. Remove transformer away from heat source such as the lamp. Remove any insulation which may be around or covering the transformer.
	Lamp and transformer incompatible	Check lamp wattage is the same as the transformer rating
Short lamp life	High lamp power	Check voltage at lamp is the same as the transformer nominal secondary voltage rating. Note: The voltage measurement must be recorded over time to check voltage fluctuations.
	Lamp and transformer incompatible	Check lamp wattage is the same as the transformer rating. Also check the secondary voltage at the lamp, that it matches the lamp nominal voltage rating.
	Over temperature of lamp	Check the light fitting and ensure the lamp is well ventilated
	Incorrect lamp wattage	Check lamp wattage is the same as the transformer rating
High or low light output	Supply voltage	Check supply voltage is correct and is the same as the transformer nominal voltage rating. Note: The supply voltage measurement should be taken over time to check voltage fluctuations.
	Incorrect wiring	Electrical practice guidelines must be followed in selection of conductor rating to avoid the impact of voltage drop
	Lamp voltage	Check secondary voltage of transformer, it must match the lamp rated voltage
	Lamp noise	Check if lamp filament is generating noise due to dimmer controller
Audible noise	Transformer noise	Check with the dimmer supplier or manufacturer to ensure the phase control dimmer is suitable for dimming inductive loads such as transformers. If dimmer switching is asymmetrical, it can induce a DC wave form into the transformer winding which can lead to overheating, noise and possible damage or failure of the transformer.

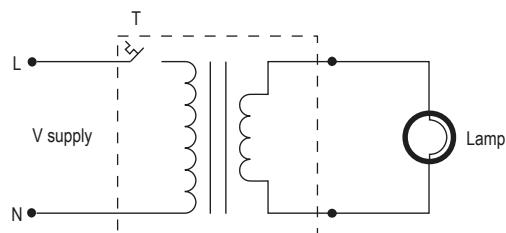

Low voltage lighting transformer circuit

## ECT transformers, 20-100 VA 50/60 Hz



Figure 1


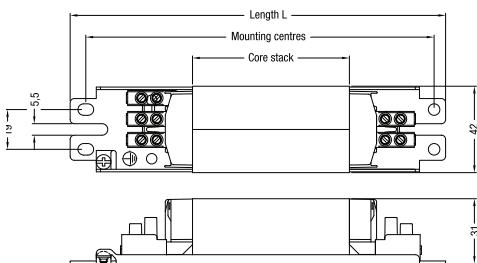


Figure 2

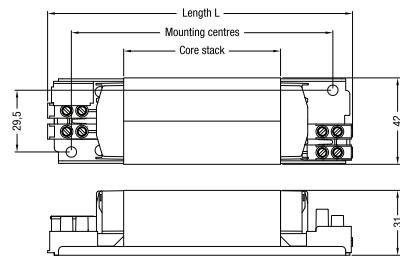

- slim cross-section and compact
- low magnetic stray field
- excellent load weight ratio
- vacuum impregnation
- insulation class 'H'
- long service life
- mains voltage: 240 V 50/60 Hz  
(other voltages and frequencies on request)
- standard secondary voltage 12 V, VA quoted  
at full resistive load 100 % duty cycle  
(other voltages and VA ratings on request)

- screw terminals
- high current on secondary may require alternative connector or flying leads at the discretion of CMP
- recommended total load is 70 to 100 % of the VA rating
- short-circuit protection via built-in self-resetting thermal cutout or external fuse

**Approved to**  
• AS/NZS 61558



- 100% final testing**  
• high voltage  
• winding short circuit  
• secondary voltage

VA	type	article no.	thermal cutout	recommended primary fuse (mA)	U <sub>L</sub> /U <sub>0</sub>	losses	stack	length	mounting centres	weight
50	ECT 75 127/12 V <sup>1</sup>		-	500	83	12.9	75	142	125	0.85
105	ECT 160 127/12 V		-	1000	83	27.1	160	265	250	1.50
50	ECT 75 220/12 V <sup>1</sup>	89000772	-	315	83	12.9	75	142	125	0.85
100	ECT 160 220/12 V	89000741	-	600	84	25.3	160	265	250	1.50
100	ECT 160 220/24 V		-	600	84	25.3	160	265	250	1.50
50	ECT 75 230/11.4 V <sup>1</sup>	89003588	120	-	83	12.9	75	142	125	0.85
50	ECT 75 230/12 V <sup>1</sup>		-	250	83	12.9	75	142	125	0.85
50	ECT 90-15-01 230/12 V	89000781	-	315	86	11.9	90	195	180	1.00
50	ECT 90-230/12 V	89000786	120	-	86	11.9	90	195	180	1.00
105	ECT 160 230/11.4 V		-	600	83	27.1	160	265	250	1.50
20	ECT 35 240/11.4 V		120	-	83	5.2	35	140	125	0.45
35	ECT 50 240/11.4 V		120	-	83	9.0	50	155	140	0.55
35	ECT 60 240/12 V		120	-	86	8.8	60	165	150	0.65
50	ECT 75 240/11.4 V	89000769	120	-	83	12.9	75	180	165	0.85
50	ECT 75 240/12 V <sup>1</sup>	89000767	-	250	83	12.9	75	142	125	0.85
50	ECT 90 240/12 V		120	-	86	11.9	90	195	180	1.00
70	ECT 105 240/11.4 V	89000717	120	-	83	18.1	105	210	195	1.10
80	ECT 120 240/11.4 V		120	-	83	20.7	120	225	210	1.20
80	ECT 140 240/12 V		120	-	86	19.0	140	245	230	1.40
100	ECT 160 240/12 V	89000739	120	-	84	25.3	160	265	250	1.50

## notes

1. refer to figure 2

## OMT transformers, 25-200 VA 50/60 Hz

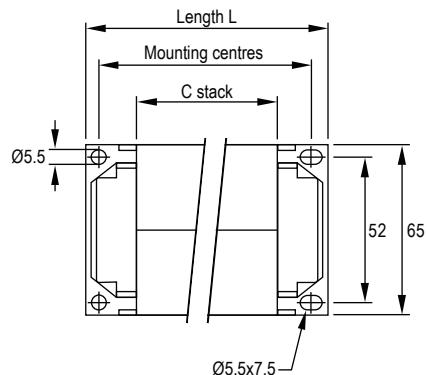

- high power density relative to low weight
- low magnetic stray field
- excellent load weight ratio
- vacuum impregnation
- insulation class 'H'
- long service life
- mains voltage: 240 V 50/60 Hz  
(other voltages and frequencies on request)


- standard secondary voltage 12 V, VA quoted at full resistive load 100 % duty cycle  
(other voltages and VA ratings on request)
- integrated screw terminals
- high current on secondary may require alternative connector or flying leads at the discretion of CMP
- recommended total load is 40 to 100 % of the VA rating
- short-circuit protection requires external fuse

**Approved to**  
• AS/NZS 61558

- 100% final testing**
- high voltage
  - winding short circuit
  - secondary voltage

VA	type	article no.	thermal cutout	recommended primary fuse (mA)	U <sub>L</sub> /U <sub>0</sub>	losses	stack	length	mounting centres	weight
100	OMT 75 220/12 V	89001399	140	80	93	13.0	75	110	96	1.80
100	OMT 75 220/24 V	89001569	140	80	93	13.0	75	110	96	1.80
100	OMTM 55-6-01 220/12 V	89001689	-		90	14.9	55	90	76	1.30
200	OMT 120 220/12 V	89001396	140	1600	93	25.9	120	155	141	2.65
200	OMT 120 220/24 V	89001454	140	1600	93	25.9	120	155	141	2.65
25	OMT 30 240/12 V	89001501	140	315	93	3.2	30	65	51	0.75
25	OMT 30 240/24 V	89001502	140	315	93	3.2	30	65	51	0.75
40	OMT 40 240/24 V	89001521	140	400	93	5.2	40	75	61	1.00
40	OMT 40 240/32 V	89001522	140	400	93	5.2	40	75	61	1.00
50	OMTM 40-2-SP01 240/12 V	89001665	140	400	92	7.5	40	75	61	1.00
50	OMTM 40-2-SP03 240/24 V		140	400	92	7.5	40	75	61	1.00
50	OMTM 55-2-SP09 240/32 V	89001686	140	630	95	5.5	55	90	76	1.30
65	OMT 55 240/115 V	89001537	140	630	93	8.4	55	90	76	1.30
65	OMT 55 240/12 V		140	630	93	8.4	55	90	76	1.30
65	OMT 55 240/24 V	89001541	140	630	93	8.4	55	90	76	1.30
80	OMT 65 240/12 V		140		93	10.4	65	100	86	1.55
100	OMT 75 240/110 V	89001580	140	800	93	13.0	75	110	96	1.80
100	OMT 75 240/12 V	89001582	140	800	93	13.0	75	110	96	1.80
100	OMT 75 240/24 V	89001589	140	800	93	13.0	75	110	96	1.80
100	OMT 75 240/32 V	89001593	140	800	93	13.0	75	110	96	1.80
150	OMTM 75-2-SP17 240/12 V	89001710	140	800	90	22.4	75	110	96	1.80
160	OMT 105 240/12 V	89001415	140	1250	93	20.7	105	140	126	2.40
160	OMT 105 240/24 V	89001420	140	1250	93	20.7	105	140	126	2.40
200	OMT 120 240/12 V	89001461	140	1600	93	25.9	120	155	141	2.65
200	OMT 120 240/24 V	89001468	140	1600	93	25.9	120	155	141	2.65
200	OMT 120 240/32 V	89001473	140	1600	93	25.9	120	155	141	2.65
25	OMT 30 415/240 V	89001510	-	16	93	3.2	30	65	51	0.75
25	OMT 30 415/24 V	89001511	-	16	93	3.2	30	65	51	0.75
40	OMT 40 415/240 V	89001528	-	20	93	5.2	40	75	61	1.00
40	OMT 40 415/24 V		-	20	93	5.2	40	75	61	1.00
100	OMT 75 415/240 V	89001608	-	40	93	13.0	75	110	96	1.80
100	OMT 75 415/24 V	89001609	-	40	93	13.0	75	110	96	1.80
120	OMTM 75-4-03 415/32 V		-	40	92	17.9	75	120	106	1.80
200	OMT 120 415/240 V	89001484	-	100	93	25.9	120	155	141	2.65

## OGT transformers, 180-1200 VA 50/60 Hz

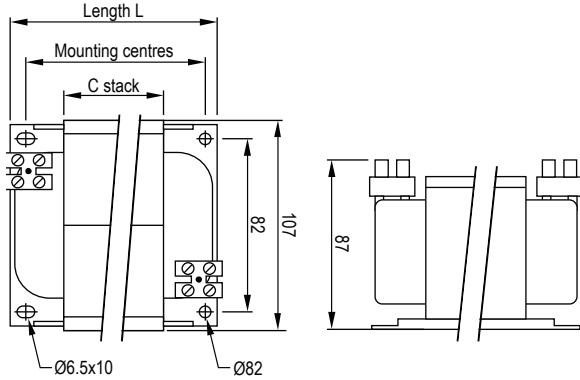


- excellent regulation 5 %
- high power density
- low magnetic stray field
- excellent load weight ratio
- vacuum impregnation
- insulation class 'H'
- long service life
- mains voltage: 240 V 50/60 Hz  
(other voltages and frequencies on request)
- standard secondary voltage 12 V, VA quoted  
at full resistive load 100 % duty cycle  
(other voltages and VA ratings on request)

- screw terminals
- high current on secondary may require alternative connector or flying leads at the discretion of CMP
- recommended total load is 20 to 100 % of the VA rating
- short-circuit protection requires external fuse

**Approved to**  
• AS/NZS 61558

**100% final testing**  
• high voltage  
• winding short circuit  
• secondary voltage

VA	type	article no.	thermal cutout	recommended primary fuse (mA)	$U_L/U_0$	losses	stack	length	mounting centres	weight
320	OGT 50 220/12 V	27021259	-	1600	95	26.4	50	130	101-117	3.5
320	OGT 50 220/24 V		-	1600	95	26.4	50	130	101-117	3.5
400	OGT 60 220/12 V	27002332	-	2000	95	33.0	60	140	111-127	4.0
400	OGT 60 220/24 V	27002333	-	2000	95	33.0	60	140	111-127	4.0
500	OGT 70 220/12 V	27021328	-	2500	95	41.3	70	150	121-137	5.0
500	OGT 70 220/24 V	27021329	-	2500	95	41.3	70	150	121-137	5.0
550	OGTM 70 230/24 V	27003523	-	2500	95	56.0	70	150	121-137	5.0
180	OGT 30 240/12 V		-		95	14.9	30	110	81-97	2.5
250	OGT 40 240/12 V		-	1250	95	20.7	40	120	91-107	3.0
250	OGT 40 240/115 V	27021224	-	1250	95	20.7	40	120	91-107	3.0
250	OGT 40 240/24 V	27021227	-	1250	95	20.7	40	120	91-107	3.0
320	OGT 50 240/12 V	27021275	-	1600	95	26.4	50	130	101-117	3.5
320	OGT 50 240/24 V	27021279	-	1600	95	26.4	50	130	101-117	3.5
400	OGT 60 240/12 V		-	2000	95	33.0	60	140	111-127	4.0
400	OGT 60 240/24 V	27021313	-	2000	95	33.0	60	140	111-127	4.0
500	OGT 70 240/115 V	27021334	-	2500	95	41.3	70	150	121-137	5.0
500	OGT 70 240/12 V	27021336	-	2500	95	41.3	70	150	121-137	5.0
550	OGTM 70 240/24 V	27003524	-	2500	95	56.0	70	150	121-137	5.0
550	OGT 80 240/12 V		-		95	45.4	80	160	131-147	5.5
650	OGT 90 240/12 V		-		95	53.7	90	170	141-157	6.0
750	OGT 100 240/12 V	27002335	-	4000	95	62.0	100	180	151-167	6.5
800	OGT 110 240/12 V		-		95	66.1	110	190	161-177	7.0
900	OGT 120 240/12 V		-		95	74.3	120	200	171-187	7.5
1.000	OGT 140 240/12 V		-	5000	95	82.6	140	220	191-207	8.5
1.000	OGT 140 240/115 V	27021163	-	5000	95	82.6	140	220	191-207	8.5
1.000	OGT 140 240/24 V	27021166	-	5000	95	82.6	140	220	191-207	8.5
1.200	OGT 160 240/12 V		-		95	99.1	160	240	211-227	9.5

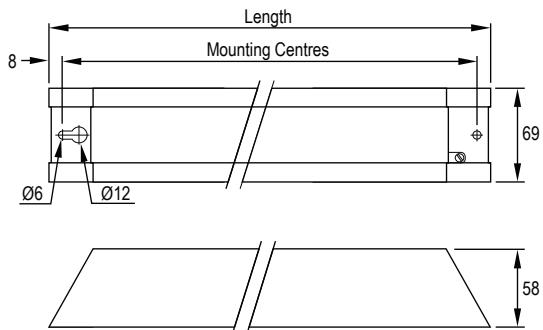**LVL (D427) indoor transformers, 65-200 VA 50/60 Hz**

Enclosure type D427

- robust extruded aluminium enclosure (58 x 69 mm)
- IP 31 protection rating
- high power density relative to low weight
- long service life
- mains voltage: 240 V 50/60 Hz (other voltages and frequencies on request)
- standard secondary voltage 12 V, VA quoted at full resistive load 100 % duty cycle (other voltages and VA ratings on request)

- screw terminals; 160VA and above have stud output terminals
- recommended total load is 40 to 100 % of the VA rating
- short-circuit protection via secondary fuse


**Approved to**  
• AS/NZS 61558

- 100% final testing**  
• high voltage  
• winding short circuit  
• secondary voltage

**Flex and plug version available**

- LVL 13A-2
- LVL 14A-2
- LVL 11A-2
- LVL 8A-2

VA	type	article no.	thermal cutout	recommended secondary fuse (A)	U <sub>L</sub> /U <sub>0</sub>	losses	length	mounting centres	weight
65	LVL13-2 240/12 V		Y	10.0	93	8.4	320	300	1.9
100	LVL14-2 240/12 V	89000918	Y	15.0	93	13.0	340	320	2.3
100	LVL14-2-24 V 240/24 V		Y	7.5	93	13.0	340	320	2.3
100	LVL14A-2-24 V 240/24 V	89000923	Y	7.5	93	13.0	320	300	2.3
160	LVL11-2 240/12 V	89000904	Y	25.0	93	20.7	360	340	3.0
160	LVL11-2-24 V 240/24 V	89000906	Y	12.0	93	20.7	360	340	3.0
200	LVL8-2 240/12 V	89000938	Y	30.0	93	25.9	360	340	3.3
200	LVL8-2-24 V 240/24 V	89000939	Y	15.0	93	25.9	360	340	3.3
200	LVL8A-2 240/12 V	89000941	Y	30.0	93	25.9	340	320	3.3

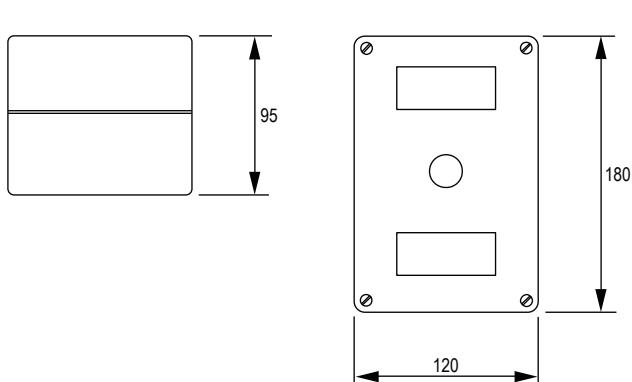**LVL (D490) weatherproof transformers, 50-200 VA 50/60 Hz**

Enclosure type D490

- high impact green polycarbonate enclosure (180 x 120 x 95 mm)
- IP 24 protection rating
- 4 x 16 mm (knock-out) conduit entries
- high power density relative to low weight
- long service life
- mains voltage: 240 V 50/60 Hz  
(other voltages and frequencies on request)
- standard secondary voltage 12 V, VA quoted at full resistive load 100 % duty cycle  
(other voltages and VA ratings on request)

- screw terminals; 160VA and above have stud output terminals
- recommended total load is 40 to 100 % of the VA rating
- short-circuit protection via secondary fuse

**Approved to**  
• AS/NZS 61558

- 100% final testing**  
• high voltage  
• winding short circuit  
• secondary voltage

VA	type	article no.	thermal cutout	recommended secondary fuse (A)	$U_L/U_0$	losses	length	mounting centres	weight
50	LVL10-2-SP22 240/12 V	89000891	Y	7.5	93	6.5	180	165	2.2
75	LVL10-2-SP23 240/12 V		Y	10.0	93	9.7	180	165	2.4
100	LVL10-2-SP24 240/12 V	89000893	Y	15.0	93	13.0	180	165	2.6
160	LVL10-2-SP20 240/12 V	89000890	Y	25.0	93	20.7	180	165	3.0
200	LVL6-2-24-01 240/24 V	89120673	-	15.0	96	12.6	180	165	3.8
200	LVL6-2-SP01 240/12 V	89120677	-	25.0	96	12.6	180	165	3.8

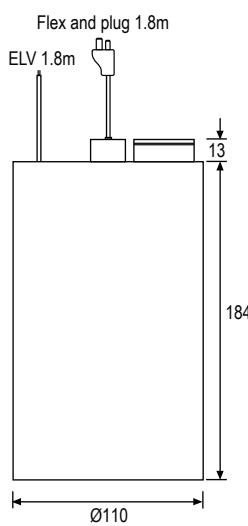
**LVL 48 below ground transformers, 50-200 VA 50/60 Hz**

figure 1

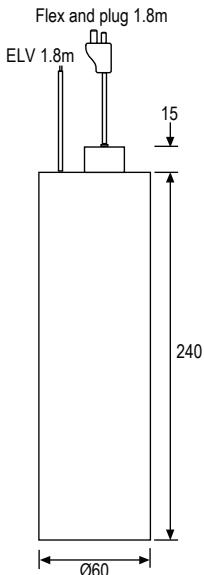


figure 2



Designed for buried applications when installed by a licenced electrical contractor in accordance with AS/NZS 3000.

- encapsulated construction
- IP 67 protection rating
- long service life
- mains voltage: 240 V 50/60 Hz  
(other voltages and frequencies on request)

- standard secondary voltage 12 V, VA quoted at full resistive load 100 % duty cycle (other voltages and VA ratings on request)
- short-circuit protection via built-in self-resetting thermal cutout (50 VA) or secondary fuse (100-200 VA)


**Approved to**  
• AS/NZS 61558

- 100% final testing**
- high voltage
  - winding short circuit
  - secondary voltage

VA	type	article no.	thermal cutout	recommended secondary fuse (A)	$U_L/U_0$	losses	length	mounting centres	weight
50	LVL48A-2-01 240/12V	89000930	Y	-	91	10.8	240	-	3.0
50	LVL48A-2-13 240/12V *	89000933	Y	-	91	10.8	240	-	3.0
100	LVL48A-2-02 240/12V	89120661	-	20	97	6.3	184	-	5.5
200	LVL48A-2-03 240/12V	89120662	-	30	97	12.6	184	-	6.5

## notes

\* input flex, no plug

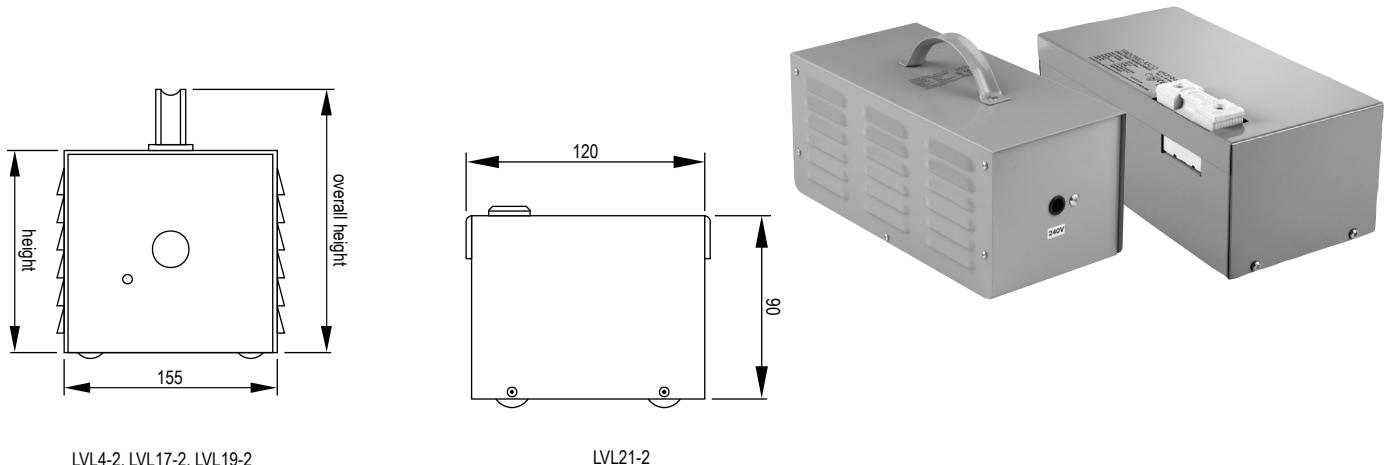**LVL (D600) indoor transformers, 250-650 VA 50/60 Hz**

- fabricated metal enclosure
- IP 31 protection rating
- excellent regulation 5 %
- high power density
- long service life
- mains voltage: 240 V 50/60 Hz  
(other voltages and frequencies on request)

- standard secondary voltage 12 V, VA quoted at full resistive load 100 % duty cycle  
(other voltages and VA ratings on request)
- stud output terminals
- recommended total load is 20 to 100 % of the VA rating
- short-circuit protection via secondary fuse

**Approved to**  
• AS/NZS 61558

- 100% final testing**  
• high voltage  
• winding short circuit  
• secondary voltage

**Flex and plug  
version available**

- LVL 4A-2
- LVL 21A-2
- LVL 19A-2
- LVL 17A-2

VA	type	article no.	thermal cutout	recommended secondary fuse (A)	$U_L/U_0$	losses	length	width	height	weight
250	LVL4-2 240/12 V	89120659	-	30	95	20.7	230	155	170	4.6
250	LVL4-2-24 V 240/24 V	89120660	-	12	95	20.7	230	155	170	4.6
320	LVL21-2 240/12 V	89120641	-	35	95	26.4	240	120	90	4.8
320	LVL21-2-24 V 240/24 V	89120642	-	20	95	26.4	240	120	90	4.8
320	LVL21A-2 240/12 V	89120646	-	35	95	26.4	240	120	90	4.8
500	LVL19-2 240/12 V	89120632	-	50	95	41.3	320	155	190	7.9
650	LVL17-2 240/12 V	89120626	-	63	95	53.7	320	155	190	8.9
650	LVL17-2-24 V 240/24 V	89120627	-	35	95	53.7	320	155	190	8.9



Index	page
<b>Lamps and lighting control equipment</b>	115
<b>Don't save light – Save energy</b>	117
<b>Energy savings in a commercial building</b>	118
<b>Quality policy</b>	119
<b>Minimum Energy Performance Standards (MEPS)</b>	120
<b>Table showing an overview of the Energy Classification System for ballasts from CELMA</b>	121

# Lamps and lighting control equipment

The factors governing the growth of the electric lamp industry include the initial cost and the lamp life. The efficiency with which the input energy is converted into visible light is also important and it is interesting to look at the efficacy of improved light sources.

In discharge lamps, a gas or vapour is contained in an arc tube. When a stream of electrons pass through the arc tube, the gas or vapour is ionised, it becomes excited and emits radiant energy. The energy radiated is distributed over wavelengths characteristic of the particular gas or vapour mix in which the discharge takes place.

The market requirements of modern light sources are defined essentially by economy and design. In lamp technology, design means size, shape and photometric performance such as luminance and colour. Discharge lamps in the form of compact fluorescent, metal halide and sodium lamps have been developed for general lighting applications, specifically in response to the market requirements of economy, design and energy efficacy.

## The function of control equipment

The correct operation of discharge lamps depends largely on the properties of the control gear and poor or incompatible equipment will inevitably result in imperfect functioning of the lamp. The control equipment and the lamp must be compatible in all respects. The control gear must limit the electric current passing through the lamp to a specified value prescribed for that particular lamp and this match is the prime criteria for ensuring compatibility between control gear and lamp. Therefore, each type and rating of discharge lamp requires compatible control gear to ensure the lamp operates within its specified electrical parameters.

Inevitably, watts losses occur in any current limiting device, therefore the question of how much power is lost (or in other words the efficiency of the control equipment) is an important factor when considering the performance of a lighting system.

The improved efficiency of only a few watts per control gear set can rapidly add up to kilowatts in large project applications. There are different types of control equipment technologies and methods of current limitation, each having its own advantages and disadvantages.

## Requirements of the control equipment

Discharge lamps cannot function directly on main supply voltage. Certain devices have to be built into the circuit in the form of what we call control equipment. Depending on the type of lamp, the control equipment performs one or more of the following primary functions:

- it provides the ignition voltage higher than the normal operating voltage to enable initial lamp starting
- it ensures that the lamp continues to operate despite the fact that twice during each AC cycle the voltage is zero
- it prevents the self destruction of the lamp by limiting and stabilising the lamp current. This is a necessary measure in view of the negative resistance characteristic of discharge lamps.

In addition to these primary functions, lighting control equipment must also fulfil a number of other important requirements:


- it must ensure a sufficiently high power factor
- it must limit the generation of harmonics
- it must offer adequate suppression of any radio interference that might be produced by the lighting system.

Finally, the control equipment must satisfy other requirements dictated by both the luminaire manufacturer and the user:

- to have control components of compact dimensions
- to have low watts loss, high efficiency characteristics which also impact the control equipment temperature
- to have low operating noise level and long service life
- to have a high impedance to frequencies used for ripple switching (if required)

Light source	Efficacy (lumens/watt )
Candle	0.1
Gas mantle	2.0
Carbon arc	7.0
Early carbon filament	2.0
Cellulose filament	3.0
Tungsten vacuum	9.0
Tungsten gas-filled coiled coil	15.0
Mercury vapour	40-60
LED white	50-70
Fluorescent lamp	64-104
Metal halide	70-90
High pressure sodium	90-125
Low pressure sodium	120-200

## Lamp families

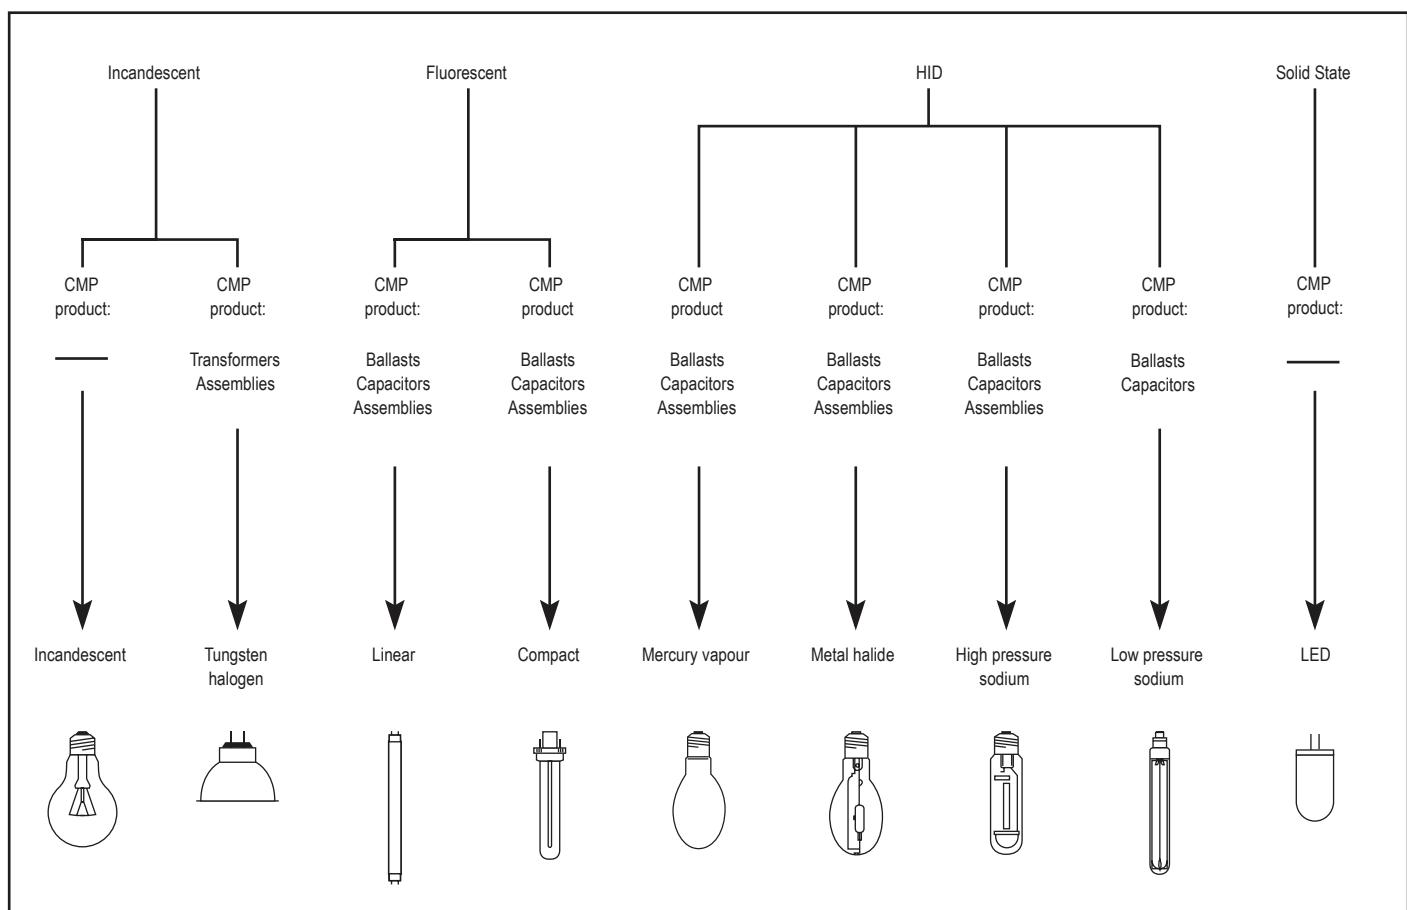

## Don't save light – save energy

CMP is internationally recognised as a world class manufacturer and supplier of energy saving lighting control equipment. "Don't Save Light – Save Energy" is synonymous with energy saving lighting and optimised performance of lamps and systems for industrial, commercial, as well as domestic applications.

Even though the long-term environmental effects of greenhouse gas emissions on the earth's climate remain uncertain, the responsibility to explore and develop economically viable opportunities to reduce emissions through energy efficiency improvements is of paramount importance to CMP.

Energy efficiency is really about cost management. In the big picture, for every unit of energy demand saved, three or four units of fuel are saved back at the power plant, plus the pollution that goes with burning that fuel. The application of energy efficient lighting ultimately leads to significant savings in electricity demand, particularly in commercial and industrial installations. Reducing energy demand, is therefore both economically sensible and environmentally responsible.

### Lighting

A lighting system should enable people to see effectively and comfortably; energy performance considerations should not detract from this primary objective. The energy load of a system depends on the use of efficient lamps operating in efficient luminaires, using efficient control equipment. Ballasts for fluorescent lamps may offer the most sustainable improvement in the energy demand of commercial and industrial lighting systems. This is because the ballast is a hard-wired component that is not easily tampered with, it lasts the life of a light fitting and its energy performance is maintenance free.

### Ballasts

Initially the EC ballast was the most reliable, economical, Australian made ferromagnetic ballast. It was developed and manufactured to cater for the insatiable demands of lighting markets, wanting a quality, affordable product. This has been achieved, far exceeding expectations for sustainability, and more than accommodating the needs of the industry.

As the requirements became more sophisticated, and to establish itself at the forefront of energy efficient lighting, the Low Loss Energy Control LLEC ballast was developed. The CMP LLEC ballast set a new industry standard for lighting efficiency.

The CMP range of ferro-magnetic ballasts offer a choice of watts loss efficiency characteristics (the unproductive power consumed by the ballast) when operated in accordance with International ( IEC ) Standards.

CMP is proud to be associated with the development and manufacture of exciting and innovative products, helping to take the lighting industry into the future.

CMP has a full range of magnetic ballasts and transformers, for fluorescent, high intensity discharge and low voltage halogen lamps.

## Energy savings in a commercial building

Lighting is a significant proportion of the energy demand. For example, in a multi-story office building, it can account for up to 40% of an annual power bill. Incorporating an energy efficient lighting system will significantly reduce energy costs.

Low loss ferro-magnetic ballasts offer:

- permanent reduction in energy use
- a long and reliable life
- no maintenance
- short payback – small capital outlay

Consider a medium sized commercial building.

Savings can be calculated when using LLEC ferro-magnetic ballasts in lieu of standard ballasts.

### A solid investment

An analysis of the cost difference using LLEC low loss over EC standard ferro-magnetic ballasts relative to the energy savings in our typical medium sized commercial building example reveals a very solid investment opportunity.

For low loss, the initial outlay is repaid in one year and the investment outlay is returned more than ninefold in the first 10 years. Even with low energy costs, this represents an excellent return on investment and a sound commercial business decision.

### Added bonus

An added bonus is significant saving in air-conditioning costs. In the case of our example of 10,000 LLEC low loss ferro-magnetic ballasts generating 4 watts less heat per circuit, that means 40kW of heat load does not have to be extracted from the building space. The additional running cost saving on the air-conditioning, taking into account heating requirements in cooler months, can be calculated and in this case would be typically in excess of A\$ 8,800 minimum per year. This represents another significant saving and ensures the payback period is even more commercially acceptable.

In Australia and New Zealand, CMP has been at the forefront of development of energy efficient ballasts that comply with the Australian and New Zealand Minimum Energy Performance Standards (MEPS).

### Look to the future

CMP ballasts offer a technology that is easily applied providing significant permanent load reduction. When looking at life cycle costs, CMP ballasts introduce savings that cannot be ignored, and actually offer a very profitable investment opportunity. Consider the energy cost of yesterday, the energy cost of today and forecast the energy cost of tomorrow, and then decide. Whatever the decision, CMP has the right Lighting Control Equipment for the application.

Criteria	Unit	EC (EEI= C)	LLEC (EEI= B1)
Quantity of ballasts		10,000	10,000
Input power		46	42
Energy savings	W	–	4
Operating period	hours/day	10	–
	days/week	5.5	–
	weeks/year	50	–
Energy costs*	A\$/kWh	0.16	–
Annual savings	A\$	–	17,600
Added savings+ 	A\$	–	8,800

\* based on average commercial user (subject to variation)

+ HVAC: air-conditioning

## Quality policy

Our Quality Policy is founded on the importance that our customers, people, processes and suppliers play in the overall quality of products and services we provide. To achieve this:

- We strive to exceed customer expectations by understanding customer requirements and building a sustainable customer relationship.
- We develop a progressive culture where people enjoy working, are continually trained and take ownership as part of our continuous improvements.
- We strive for continuous quality improvement and excellence through continued development of our Quality System.
- We have structured procedures that are simple and easy to use that add value to the organisation and are geared towards our customer requirements.
- We use only those key suppliers that have demonstrated that they have a Quality Assurance system appropriate to the reliable supply of the products.
- We conform to the Quality system requirements of AS/NZS ISO 9001:2008.
- We use internationally recognised benchmarks to continually guide and review our progress.

### Recognition of international excellence

A commitment to quality  
As the leading manufacturer of lighting control equipment, CMP success is built on a philosophy of always striving to achieve excellence in every field. This not only applies to levels of excellence in control equipment and component engineering, but also in our service to the customer.

Our commitment is manifested in benchmark standards of product reliability, customer relations, product support and attention to detail. Our aim is to be recognised as a customer focused, quality-oriented organisation.

### ISO9001 Standard Certified

A key element of commitment to quality is the establishment, implementation and maintenance of an internationally recognized quality system, consistent with the requirements of the Quality System Standard.

This is our commitment to providing a total quality system supporting CMP components from conception, through manufacture to the customer.



Standards Australia  
ISO 9001  
Lic QEC 22895

## Minimum Energy Performance Standards (MEPS)

The Australian (and New Zealand) Government introduced a program of Minimum Energy Performance Standard (MEPS) for fluorescent lamp ballasts within the framework of the National Appliance Equipment Efficiency Program early 2003. From that time, State and Territory laws have required fluorescent lamp ballasts to be registered by the manufacturer, or the importer, as to their Energy Efficiency Index (EEI) within the MEPS efficiency requirements.

### **MEPS classifications (Energy Efficiency Index)**

The corrected total input power of the lamp-ballast circuit is defined as "Energy Efficiency Index" (EEI) of the lamp-ballast combination. There are 7 classifications of efficiency with every class defined by a limiting value of total input power related to the pertinent ballast lumen factor. A BLF of 1.00 is defined for high frequency electronic ballasts and 0.95 for ferromagnetic ballasts.

### **What are the technical requirements in Australia?**

In Australia, MEPS is applied to ballasts used with linear fluorescent lamps (type T) from 15W and above. There is no mandatory requirement for ballasts used with compact fluorescent lamps but such ballasts can be voluntarily marked.


The Australian MEPS levels are essentially harmonised with the European Commission requirements drafted in late 2000 (EU directive 2000/55/EC). The EU requirements cover a wider range of lamps, including most compact fluorescent lamps, except integral types.

Full details are contained in AS/NZS 4783.2, Energy Labelling and Minimum Energy Performance Standards Requirements and AS/NZS 4783.1, Method of Measurement to Determine Energy Consumption and Performance of Ballast-Lamp Circuits.

### **Benefits**

From Government studies, the impact of the MEPS Regulation suggests that the standard Class C ballast will disappear from the Australian market, replaced by more efficient Class A (electronic) and B1 and B2 (lower watts loss) ballasts.

In so doing, the community will have saved almost \$ 270 million by 2010. At the same period, the annual abatement of greenhouse gas derived from this measure will be in the order of 350,000 tonnes.

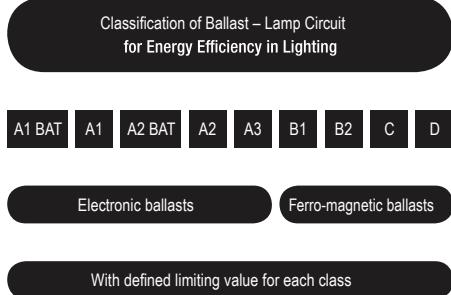

Lamp type	Lamp power		Ilcos code	EEI-Class						
	50 Hz	HF		A1 <sup>2</sup>	A2	A3	B1	B2	C	D
T				maximum corrected total input power – watts						
	15 W	13.5 W	FD-15-E-G13-26/450	18 W	≤ 16 W	≤ 18 W	≤ 21 W	≤ 23 W	≤ 25 W	> 25 W
	18 W	16 W	FD-18-E-G13-26/600	21 W	≤ 19 W	≤ 21 W	≤ 24 W	≤ 26 W	≤ 28 W	> 28 W
	30 W	24 W	FD-30-E-G13-26/895	30 W	≤ 31 W	≤ 33 W	≤ 36 W	≤ 38 W	≤ 40 W	> 40 W
	36 W	32 W	FD-36-E-G13-26/1200	38 W	≤ 36 W	≤ 38 W	≤ 41 W	≤ 43 W	≤ 45 W	> 45 W
	58 W	50 W	FD-58-E-G13-26/1500	59 W	≤ 55 W	≤ 59 W	≤ 64 W	≤ 67 W	≤ 70 W	> 70 W

Notes

1. Values are for 230V rated ballasts, an additional 0.5 and 1.0W is added for the 240 and 250V rated ballasts respectively.

2. A ballast marked with classification EEI A1 shall be dimmable and the values in the table refer to the maximum total input power at 100%.

The total circuit power at 25% light output shall not exceed 50% of the value stated for Class A3 of the same lamp.

## Energy classification table for lighting systems in accordance with ErP directive 2009/125/EC

Lamp data				Ballast efficiency ( $P_{\text{lamp}} / P_{\text{input}}$ )					
				Non-dimmable					
Lamp type	Nominal wattage	ILCOS code	Rated / typical wattage		A2 BAT	A2	A3	B1	B2
			50 Hz	HF					
	W		W	W					
T8	15	FD-15-E-G13-26/450	15	13.5	87.8 %	84.4 %	75.0 %	67.9 %	62.0 %
T8	18	FD-18-E-G13-26/600	18	16	87.7 %	84.2 %	76.2 %	71.3 %	65.8 %
T8	30	FD-30-E-G13-26/900	30	24	82.1 %	77.4 %	72.7 %	79.2 %	75.0 %
T8	36	FD-36-E-G13-26/1200	36	32	91.4 %	88.9 %	84.2 %	83.4 %	79.5 %
T8	38	FD-38-E-G13-26/1050	38.5	32	87.7 %	84.2 %	80.0 %	84.1 %	80.4 %
T8	58	FD-58-E-G13-26/1500	58	50	93.0 %	90.9 %	84.7 %	86.1 %	82.2 %
T8	70	FD-70-E-G13-26/1800	69.5	60	90.9 %	88.2 %	83.3 %	86.3 %	83.1 %
TC-L	18	FSD-18-E-2G11	18	16	87.7 %	84.2 %	76.2 %	71.3 %	65.8 %
TC-L	24	FSD-24-E-2G11	24	22	90.7 %	88.0 %	81.5 %	76.0 %	71.3 %
TC-L	36	FSD-36-E-2G11	36	32	91.4 %	88.9 %	84.2 %	83.4 %	79.5 %
TCF	18	FSS-18-E-2G10	18	16	87.7 %	84.2 %	76.2 %	71.3 %	65.8 %
TCF	24	FSS-24-E-2G10	24	22	90.7 %	88.0 %	81.5 %	76.0 %	71.3 %
TCF	36	FSS-36-E-2G10	36	32	91.4 %	88.9 %	84.2 %	83.4 %	79.5 %
TC-D/ DE	10	FSQ-10-E-G24q=1 FSQ-10-I-G24d=1	10	9.5	89.4 %	86.4 %	73.1 %	67.9 %	59.4 %
TC-D/ DE	13	FSQ-13-E-G24q=1 FSQ-13-I-G24d=1	13	12.5	91.7 %	89.3 %	78.1 %	72.6 %	65.0 %
TC-D/ DE	18	FSQ-18-E-G24q=2 FSQ-18-I-G24d=2	18	16.5	89.8 %	86.8 %	78.6 %	71.3 %	65.8 %
TC-D/ DE	26	FSQ-26-E-G24q=3 FSQ-26-I-G24d=3	26	24	91.4 %	88.9 %	82.8 %	77.2 %	72.6 %
TC-T/ TE	13	FSM-13-E-GX24q=1 FSM-13-I-GX24d=1	13	12.5	91.7 %	89.3 %	78.1 %	72.6 %	65.0 %
TC-T/ TE	18	FSM-18-E-GX24q=2 FSM-18-I-GX24d=2	18	16.5	89.8 %	86.8 %	78.6 %	71.3 %	65.8 %
TC-T/ TC-TE	26	FSM-26-E-GX24q=3 FSM-26-I-GX24d=3	26.5	24	91.4 %	88.9 %	82.8 %	77.5 %	73.0 %
TC-DD/ DDE	10	FSS-10-E-GR10q FSS-10-L/P/H-GR10q	10.5	9.5	86.4 %	82.6 %	70.4 %	68.8 %	60.5 %
TC-DD/ DDE	16	FSS-16-E-GR10q FSS-16-I-GR8 FSS-16-L/P/H-GR10q	16	15	87.0 %	83.3 %	75.0 %	72.4 %	66.1 %
TC-DD/ DDE	21	FSS-21-E-GR10q FSS-21-L/P/H-GR10q	21	19.5	89.7 %	86.7 %	78.0 %	73.9 %	68.8 %
TC-DD/ DDE	28	FSS-28-E-GR10q FSS-28-I-GR8 FSS-28-L/P/H-GR10q	28	24.5	89.1 %	86.0 %	80.3 %	78.2 %	73.9 %
TC-DD/ DDE	38	FSS-38-E-GR10q FSS-38-L/P/H-GR10q	38.5	34.5	92.0 %	89.6 %	85.2 %	84.1 %	80.4 %
TC	5	FSD-5-I-G23 FSD-5-E-2G7	5.4	5	72.7 %	66.7 %	58.8 %	49.3 %	41.4 %
TC	7	FSD-7-I-G23 FSD-7-E-2G7	7.1	6.5	77.6 %	72.2 %	65.0 %	55.7 %	47.8 %
TC	9	FSD-9-I-G23 FSD-9-E-2G7	8.7	8	78.0 %	72.7 %	66.7 %	60.3 %	52.6 %
TC	11	FSD-11-I-G23 FSD-11-E-2G7	11.8	11	83.0 %	78.6 %	73.3 %	66.7 %	59.6 %
T5	4	FD-4-E-G5-16/150	4.5	3.6	64.9 %	58.1 %	50.0 %	45.0 %	37.2 %
T5	6	FD-6-E-G5-16/225	6	5.4	71.3 %	65.1 %	58.1 %	51.8 %	43.8 %

**Appendix**  
**Energy classification table for lighting systems**

Lamp data				Ballast efficiency ( $P_{\text{lamp}} / P_{\text{input}}$ )					
				Non-dimmable					
Lamp type	Nominal wattage W	ILCOS code	Rated / typical wattage		A2 BAT	A2	A3	B1	B2
			50 Hz	HF					
			W	W					
T5	8	FD-8-E-G5-16/300	7.1	7.5	69.9 %	63.6 %	58.6 %	48.9 %	42.7 %
T5	13	FD-13-E-G5-16/525	13	12.8	84.2 %	80.0 %	75.3 %	72.6 %	65.0 %
T9-C	22	FSC-22-E-G10q-29/200	22	19	89.4 %	86.4 %	79.2 %	74.6 %	69.7 %
T9-C	32	FSC-32-E-G10q-29/300	32	30	88.9 %	85.7 %	81.1 %	80.0 %	76.0 %
T9-C	40	FSC-40-E-G10q-29/400	40	32	89.5 %	86.5 %	82.1 %	82.6 %	79.2 %
T2	6	FDH-6-L/P-W4.3x8.5d-7/220		5	72.7 %	66.7 %	58.8 %		
T2	8	FDH-8-L/P-W4.3x8.5d-7/320		7.8	76.5 %	70.9 %	65.0 %		
T2	11	FDH-11-L/P-W4.3x8.5d-7/420		10.8	81.8 %	77.1 %	72.0 %		
T2	13	FDH-13-L/P-W4.3x8.5d-7/520		13.3	84.7 %	80.6 %	76.0 %		
T2	21	FDH-21-L/P-W4.3x8.5d-7/		21	88.9 %	85.7 %	79.2 %		
T2	23	FDH-23-L/P-W4.3x8.5d-7/		23	89.8 %	86.8 %	80.7 %		
T5-E	14	FDH-14-G5-L/P-16/550		13.7	84.7 %	80.6 %	72.1 %		
T5-E	21	FDH-21-G5-L/P-16/550		20.7	89.3 %	86.3 %	79.6 %		
T5-E	24	FDH-24-G5-L/P-16/550		22.5	89.6 %	86.5 %	80.4 %		
T5-E	28	FDH-28-G5-L/P-16/1150		27.8	89.8 %	86.9 %	81.8 %		
T5-E	35	FDH-35-G5-L/P-16/1450		34.7	91.5 %	89.0 %	82.6 %		
T5-E	39	FDH-39-G5-L/P-16/850		38	91.0 %	88.4 %	82.6 %		
T5-E	49	FDH-49-G5-L/P-16/1450		49.3	91.6 %	89.2 %	84.6 %		
T5-E	54	FDH-54-G5-L/P-16/1150		53.8	92.0 %	89.7 %	85.4 %		
T5-E	80	FDH-80-G5-L/P-16/1150		80	93.0 %	90.9 %	87.0 %		
T5-E	95	FDH-95-G5-L/P-16/1150		95	92.7 %	90.5 %	84.1 %		
T5-E	120	FDH-120-G5-L/P-16/1450		120	92.5 %	90.2 %	84.5 %		
T5-C	22	FSCH-22-L/P-2GX13-16/225		22.3	88.1 %	84.8 %	78.8 %		
T5-C	40	FSCH-40-L/P-2GX13-16/300		39.9	91.4 %	88.9 %	83.3 %		
T5-C	55	FSCH-55-L/P-2GX13-16/300		55	92.4 %	90.2 %	84.6 %		
T5-C	60	FSCH-60-L/P-2GX13-16/375		60	93.0 %	90.9 %	85.7 %		
TC-LE	40	FSDH-40-L/P-2G11		40	91.4 %	88.9 %	83.3 %		
TC-LE	55	FSDH-55-L/P-2G11		55	92.4 %	90.2 %	84.6 %		
TC-LE	80	FSDH-80-L/P-2G11		80	93.0 %	90.9 %	87.0 %		
TC-TE	32	FSMH-32-L/P-2GX24q=3		32	91.4 %	88.9 %	82.1 %		
TC-TE	42	FSMH-42-L/P-2GX24q=4		43	93.5 %	91.5 %	86.0 %		
TC-TE	57	FSM6H-57-L/P-2GX24q=5 FSM8H-57-L/P-2GX24q=5		56	91.4 %	88.9 %	83.6 %		
TC-TE	70	FSM6H-70-L/P-2GX24q=6 FSM8H-70-L/P-2GX24q=6		70	93.0 %	90.9 %	85.4 %		
TC-TE	60	FSM6H-60-L/P-2G8=1		63	92.3 %	90.0 %	84.0 %		
TC-TE	62	FSM8H-62-L/P-2G8=2		62	92.2 %	89.9 %	83.8 %		
TC-TE	82	FSM8H-82-L/P-2G8=2		82	92.4 %	90.1 %	83.7 %		
TC-TE	85	FSM6H-85-L/P-2G8=1		87	92.8 %	90.6 %	84.5 %		
TC-TE	120	FSM6H-120-L/P-2G8=1 FSM8H-120-L/P-2G8=1		122	92.6 %	90.4 %	84.7 %		
TC-DD	55	FSSH-555-L/P-GRY10q3		55	92.4 %	90.2 %	84.6 %		

## CMP Controls guarantee conditions

CMP Controls stands for high quality products and services. Guarantee for lighting components exceeds usual legal guarantee.

CMP Controls offers a 5-year guarantee on all devices with a rated life of at least 50,000 hours of operation. A guarantee of 2 years is offered on devices with a rated life of less than 50,000 hours of operation.

### 1. Products

This guarantee applies to all control gear supplied by CMP Controls ( magnetic ballasts for fluorescent and HID lamps, magnetic transformers, capacitors and control gear assemblies ).

### 2. Duration of the guarantee

The guarantee period for CMP Controls products is 2 or 5 years.

#### 2a. Basic guarantee

For products with a physical rated life of  $\geq 50,000$  hours of operation or more, CMP Controls offers a guarantee for a period of 5 years under the following conditions. To ensure that the product guarantee matches the guarantee offered by the luminaire manufacturer, the guarantee is extended by a further 6 months from the date of manufacture indicated on the product, up to a maximum of 66 months from the date of manufacture.

This applies to those products for which a rated life of  $\geq 50,000$  hours of operation is indicated in the data sheets.

#### 2b. Limited guarantee

For products with a physical rated life of less than 50,000 hours of operation, CMP Controls offers a guarantee for a period of 2 years under the following conditions. To ensure that the product guarantee matches the guarantee offered by the luminaire manufacturer, the guarantee is extended by a further 6 months from the date of manufacture indicated on the product, up to a maximum of 30 months from the date of manufacture. This applies to those products for which a rated life of  $< 50,000$  hours of operation is indicated in the data sheets, e.g. capacitors.

### 3. Guarantee conditions

The guarantee offered by CMP Controls is valid under the following conditions:

The products from CMP Controls must be used in accordance with the relevant product and application specifications. Limit values for temperatures and voltages must not be exceeded and the product not exposed to any mechanical stresses.

The guarantee for the devices applies only if the product is installed with lamps that comply with the relevant IEC specifications.

The guarantee covers solely product failures caused by material, design or production faults and failure rates that exceed the rated failure rate. The rated life and rated failure rate of a device are considered to be the values defined in the technical documentation.

Additional conditions for magnetic ballasts of fluorescent lamps  
In case of extreme conditions ( stuck starter ) the increased temperature on the ballast will lead to a reduced lifetime, if failed components are not replaced within a short time. The guarantee conditions therefore only apply upon use in combination with safety starters or proof of immediate lamp and starter replacement.

### 4. Execution of the guarantee

In the event of failures exceeding the nominal failure rate, CMP Controls on its sole discretion might decide to repair defective components or products, supply adequate products as replacement or reimburse products to original customers. The customers or end customers bear the costs for demounting and remounting as well as for sending in and returning products. Any other costs, e.g. replacement costs upon installation, costs caused from failures of the installation or other damage and/or consequential damage are not covered by this guarantee.

The indicated lifetime is achieved by operating lighting components according to the conditions specified by the manufacturers, to the relevant international standards and in accordance with local regulations.

In designing and installing luminaires, it should be remembered that the ballast and/or other components may have to be replaced before the luminaire comes to the end of its life. The products must therefore be easy to access at all times. When installing the products, the requirements of easy maintenance must therefore be taken into consideration to keep maintenance costs down.

### 5. Utilisation of the Guarantee

The guarantee has to be claimed immediately by returning the defective product in order to check the validity of the claim.

### 6. Applicable Law

See the conditions supplied with the invoice.

## Appendix

### Terms and conditions of sale

## Terms and conditions of sale

Unless otherwise agreed to in writing, all goods ("Goods") sold or offered for sale by CMP Controls Pty. Ltd. ("Supplier") are done so subject to the following conditions:

### 1. Quotations

Quotations given are valid for deliveries within 30 days from date of quotation. Orders placed within this period for delivery after the 30 days are subject to rise and fall adjustments. Prices are free into store Adelaide, Brisbane, Melbourne and Sydney for deliveries in excess of one ( 1 ) tonne loads. For export shipments, unless otherwise agreed to in writing, all prices quoted are ex works Melbourne for less than container load shipments or free on board Melbourne for full container load shipments.

### 2. Prices

2.1 Australian Domestic Prices: All prices are quoted excluding GST, and any GST applicable will be charged to the Buyer on a Tax Invoice ( as defined in the GST Act ).

2.2 Export Prices: All export prices are quoted excluding all Government taxes, charges and/or imposts charged outside Australia.

### 3. Delivery

Late delivery or non-delivery due to any circumstances or events beyond the Supplier's control shall not constitute a breach of contract by the Supplier and the Supplier shall not be liable for any loss or damage howsoever arising through such late delivery or non-delivery. The choice of the carrier and method of transport remains with the Supplier, unless transport is paid for by the Buyer.

### 4. Warranties

The Warranties: Subject to paragraphs 5 and 6, unless otherwise agreed between the parties in writing, Goods manufactured, or sold, by the Supplier under any of the Brand Names, are warranted against faulty materials and/or workmanship:

4.1 for one year from date of delivery; or

4.2 in the case of Components, for two years from the date of manufacture of the Component.

### 5. Conditions of Warranty

The warranties set out in paragraph 4 are subject to compliance with the following conditions:

5.1 Goods must be used and handled with due care, under normal operating conditions and in accordance with the Relevant Standards and good practices.

5.2 Goods must be mounted, installed and connected with due care and in accordance with the Relevant Standards and good practices.

5.3 IEC compliant lamps must be utilised for all Components.

5.4 Goods must be returned to the Supplier's local office within 14 days of the detection of the alleged fault in their then current condition. Willfully damaged or defaced Goods are excluded from this warranty.

5.5 The Supplier reserves the right to request that the complete piece of equipment containing the allegedly faulty component be returned to the Supplier for inspection and testing.

5.6 In the case of any dispute under this warranty, the Supplier reserves the right to obtain the opinion of a suitably qualified independent expert whose opinion as to any question of fact under this warranty shall be binding on the parties.

### 6. Limitation of Liability

6.1 The Supplier will not be liable for any loss or damage incurred by the Buyer or End User for Goods damaged as a result of negligence, alteration, accident, use of the Goods in a way which is not in compliance with the Relevant Standards or use of the Goods in any way for which the Goods were not designed or approved by the Supplier or as a result of improper fitting, repair or replacement.

6.2 The liability of the Supplier in respect of faulty materials or workmanship shall, at the option of the Supplier, be limited to one of the following:

- ( a ) the replacement of the Goods;
- ( b ) the supply of equivalent Goods;
- ( c ) the repair of the Goods; or
- ( d ) the payment of the cost of having the Goods repaired.

6.3 The Supplier will not be liable for any special indirect or consequential damage arising out of the supply of the Goods.

6.4 If a claim is made by a Buyer or End User under one of the warranties set out in paragraph 4, the Supplier will not accept any claim for costs, charges or expenses incurred by the Buyer or End User in relation to replacement, supply or repair of the Goods.

6.5 Except for any warranties and conditions which cannot be excluded under any Act, all warranties and conditions with regard to the Goods sold which are implied by common law, statute or trade usage are excluded to the full extent legally permissible.

### 7. Payments

Unless otherwise agreed to in writing, all invoices are net payable thirty ( 30 ) days following the month of delivery to the Supplier's head office. All payments received by the Supplier must, in all cases, be allocated to the oldest account due for payment. Installments or part delivery of Goods shall be paid for separately and payment shall be made on or before the due date as stated above. An account-keeping fee of one and a half percent ( 1.5 % ) per month ( or part thereof ) will be charged ( minimum of \$ 10.00 per month ) on all accounts which are unpaid within the above terms. For export orders, unless otherwise agreed to in writing, the payment terms must be via an unconditional and irrevocable letter of credit drawn at sight.

## Appendix

### Terms and conditions of sale

#### **8. Return of Goods**

Goods will not be accepted for return without prior written consent from the Supplier. Goods manufactured to Buyer's requirements and/or specification cannot be returned for credit.

#### **9. Patents etc.**

In all cases where the design is provided by the Buyer, the Supplier does not accept any responsibility for infringement of any patent, design, copyright, electronic layout or any other intellectual property or any other right of any other party. The Supplier undertakes that no disclosure of the design will be knowingly made to any other party unless with the Buyer's expressed or implied consent. The Buyer by acceptance of this quotation agrees to indemnify the Supplier absolutely in respect of all or any liability which the Supplier may incur in respect of any infringement of any of the rights referred to in this paragraph which might arise as a result of the Buyer's order.

#### **10. Location of Contract ( Legal Domicile )**

Any contract with the Supplier shall be deemed to have been executed and entered into in the State of Victoria, Australia and the same shall be construed enforced and performed in accordance with the laws thereof. Any proceedings shall be brought and heard in the courts of the State of Victoria.

#### **11. Title and Risk**

The Supplier supplies Goods on condition that,

- 11.1 Property in the Goods does not pass to the Buyer until they have been paid in full and the Supplier has been paid for all other moneys then owing to the Supplier by the Buyer.
- 11.2 Notwithstanding paragraph 11.1, the Goods are at the risk of the Buyer as soon as they have been delivered to or into the custody of the Buyer or the Buyer's agent.
- 11.3 Until property in the Goods passes to the Buyer under paragraph 11.1, the Goods are merely entrusted to the Buyer as fiduciary and the Supplier remains the legal and beneficial owner of the Goods with full power to re-sell and regain possession of them if the Buyer defaults in payment of the purchase price.
- 11.4 If the Buyer defaults in payment of the purchase price or if the Buyer becomes insolvent, the Supplier and/or its authorised agents may at any time without notice to the Buyer enter onto the Buyer's premises and any other premises at which the Goods are situated for the purpose of recovering possession of them. The Buyer agrees to indemnify the Seller against all costs, losses and expenses ( including without limitation legal costs ) incurred by the Seller as a result of or in connection with any default or breach of these Terms and Conditions of Sale by the Buyer.
- 11.5 If the Buyer receives any proceeds from the sale of the Goods from any other party, the Buyer receives those proceeds on trust for the Supplier to be applied in payment of the purchase price for the Goods and shall remit such sum forthwith to the Supplier. All such payments received by the Supplier shall be allocated to the oldest account due for payment.

#### **12. Conflict with Buyer's terms**

If any purchase order or other trading terms of the Buyer conflict with or are inconsistent with any of the Supplier's terms and conditions of sale, then the Supplier's terms and conditions of sale as amended from time to time prevail and will apply notwithstanding any conflicting or inconsistent terms of the Buyer. The Buyer acknowledges that the sale by the Supplier of any Goods will not constitute acceptance of any conditions of purchase of the Buyer which conflict or are inconsistent with any of the Supplier's terms and conditions of sale, even where the Supplier acknowledges the Buyer's conditions prior to, upon or by delivery of Goods.

#### **13. Non-Waiver**

A waiver by the Supplier with respect to any breach or default by the Buyer shall not constitute a continuing waiver of any other breach or default or of any other right or remedy. A failure or delay by the Supplier in exercising a right or remedy does not operate as a waiver of that right or remedy.

#### **14. Variation**

A variation of these Terms and Conditions of Sale shall be ineffective unless it is in writing and signed by the Supplier.

#### **15. Severability**

If a Court determines that a condition or part of these conditions is unenforceable, illegal or void then it shall be severed and the remainder of these Terms and Conditions of Sale shall remain operative.

#### **16. Definitions**

In these Terms and Conditions of Sale the following terms shall have the following meanings:

- 16.1 "Brand Names" means, "CMP Controls", "Tridonic", "TridonicAtco", and "Atco";
- 16.2 "Buyer" means the buyer of the Goods;
- 16.3 "Component" means a component designed for use in the control of lighting;
- 16.4 "End User" means a person or business which purchases or uses Goods supplied directly or indirectly by the Buyer;
- 16.5 "Goods and Services Tax" or "GST" has the same meaning as given in the GST Act;
- 16.6 "GST Act" means the A New Tax System ( Goods and Services Tax ) Act 1999 ( Commonwealth );
- 16.7 "Relevant Standards" means the relevant International Organisation for Standardisation ("ISO") standard and the relevant International Electrotechnical Commission ("IEC") standard applicable to the Goods.